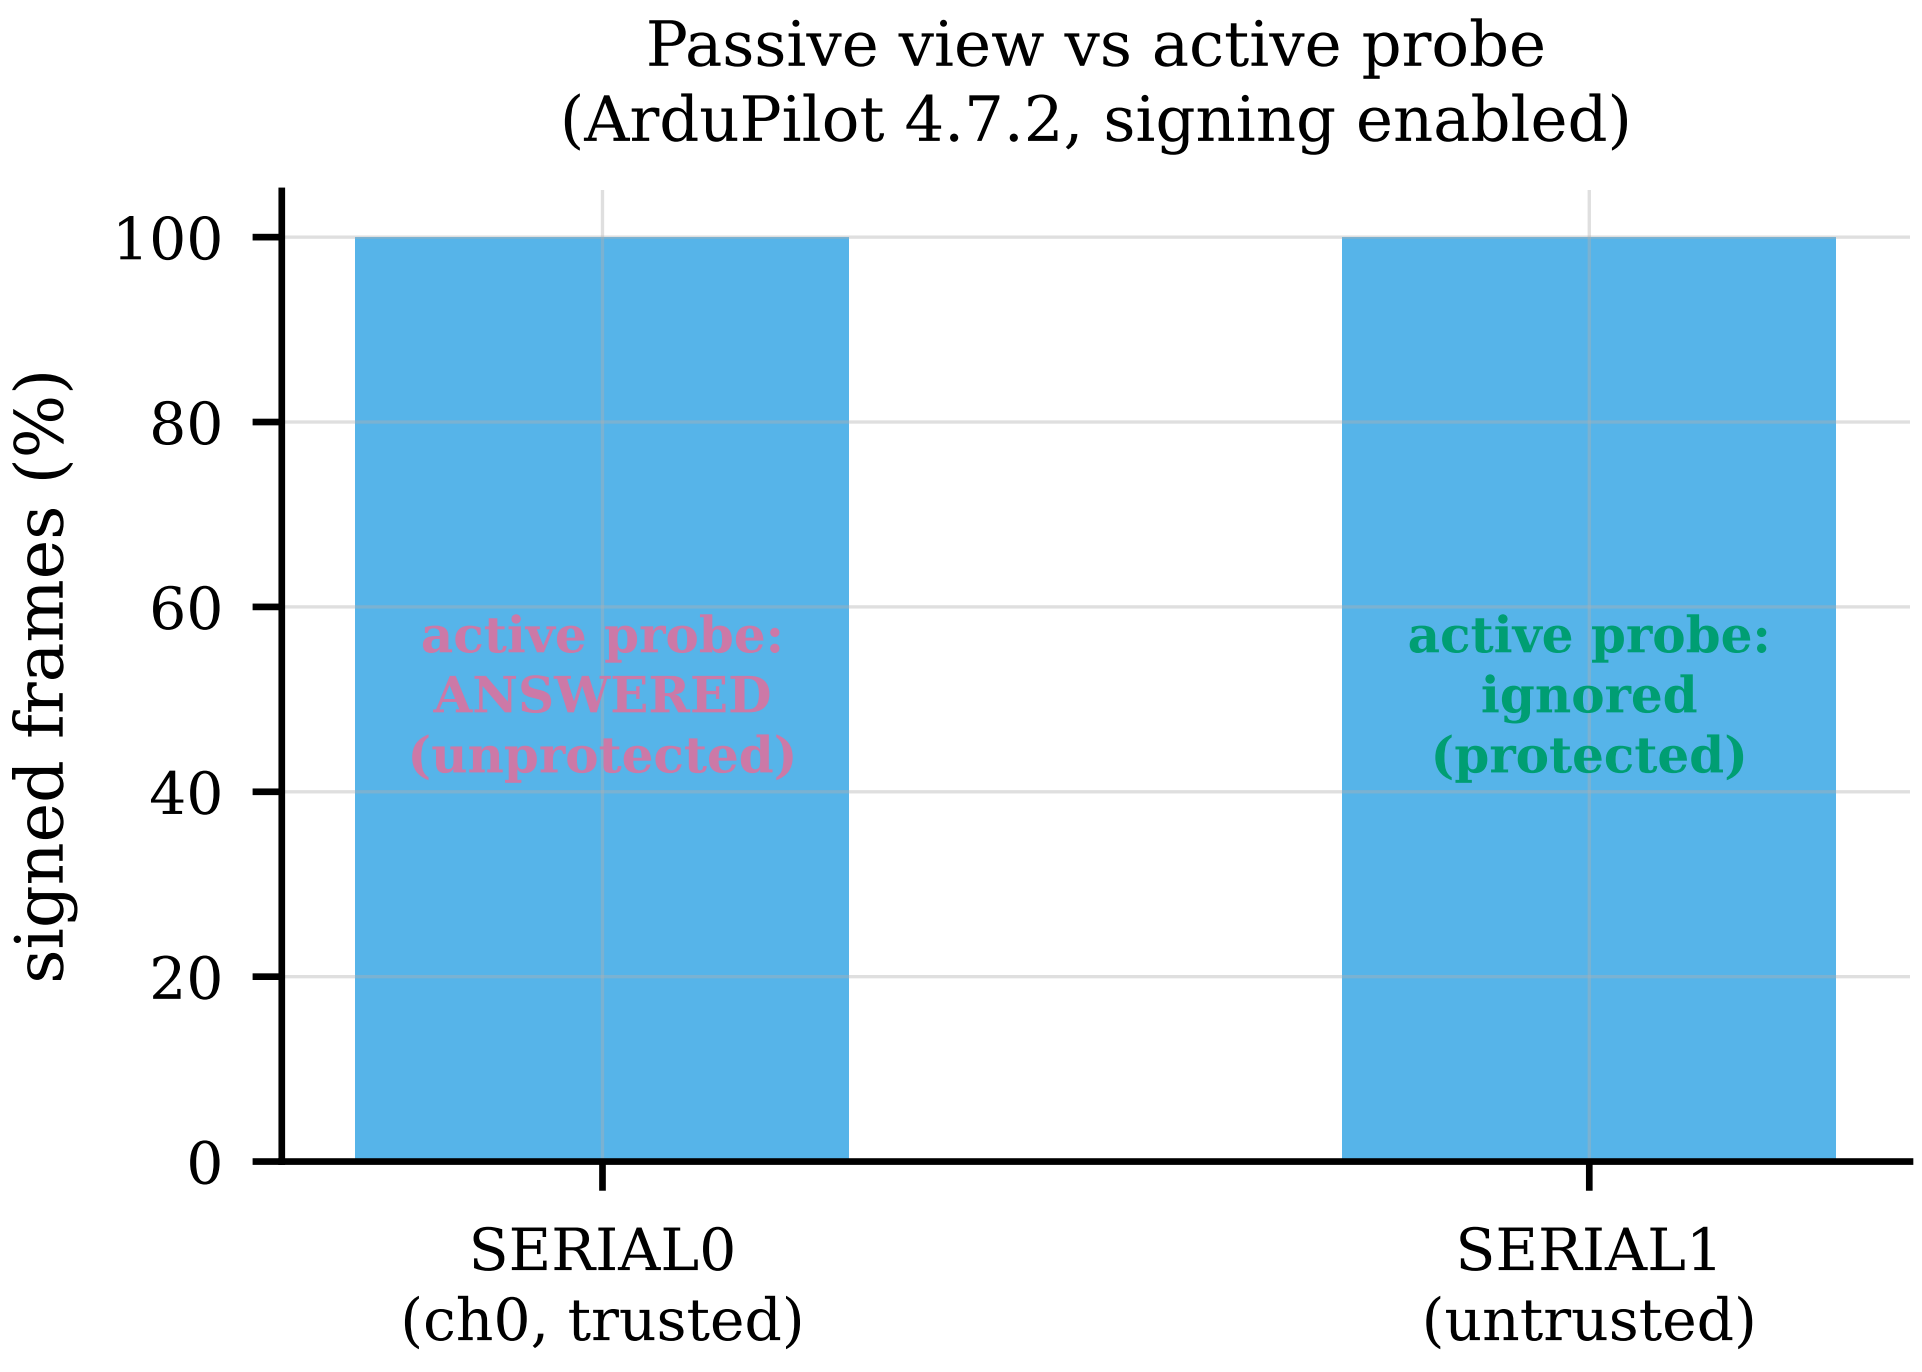
Passive view vs active probe
(ArduPilot 4.7.2, signing enabled)
signed frames (%)
100
80
60
40
20
0
active probe:
ANSWERED
(unprotected)
active probe:
ignored
(protected)
SERIAL0
(ch0, trusted)
SERIAL1
(untrusted)