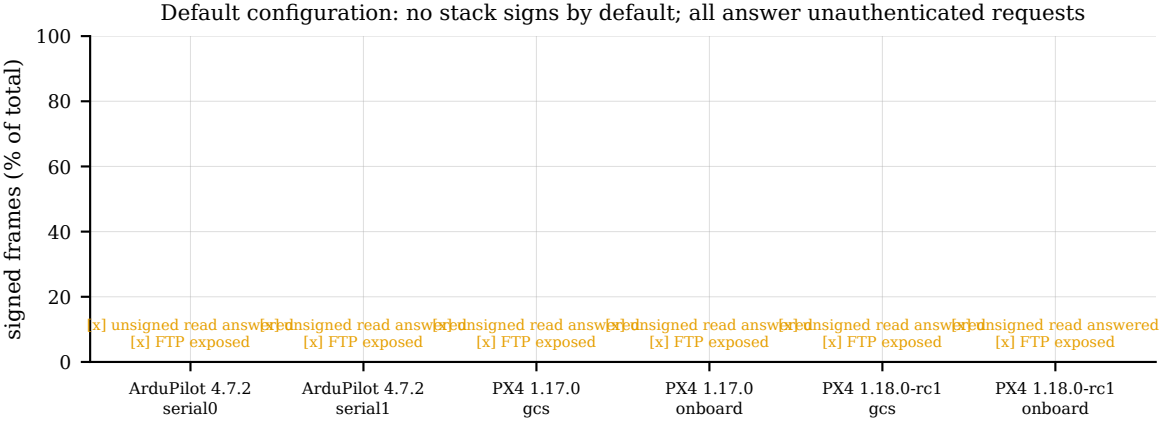
Default configuration: no stack signs by default; all answer unauthenticated requests
signed frames (% of total)
100
80
60
40
20
0
[x] unsigned read answered
[x] FTP exposed
ArduPilot 4.7.2
serial0
ArduPilot 4.7.2
serial1
PX4 1.17.0
gcs
PX4 1.17.0
onboard
PX4 1.18.0-rc1
gcs
PX4 1.18.0-rc1
onboard