

PRAKTIKUM KELOMPOK 9

LAPORAN KONFIGURASI ROUTING STATIK

PENERAPAN SUBNETTING DAN VLSM

NAMA: BRILIAN ABEDNEGO WIRYAWAN

KELAS: XI TJKT 1 (06)

DESAIN JARINGAN :

IP ADDRESS UTAMA 10.10.10.0/24


LAN A : 50 HOST

LAN B : 10 HOST


Table jaringan sebagai berikut :

Jumlah Host	Net ID	Host valid	Broadcast	Keterangan
50	10.10.10.0/26	10.10.10.1 – 10.10.10.62	10.10.10.0/26	LAN A
10	10.10.10.64/28	10.10.10.65 – 10.10.10.78	10.10.10.0/26	LAN B
4	10.10.10.80/30	10.10.10.81- 10.10.10.82	10.10.10.0/26	R1 – R2


Gambar topologi Lengkap Jaringan :

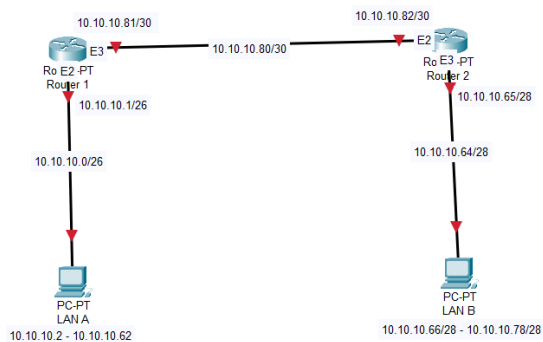

1. Konfigurasi Alamat IP Router 1

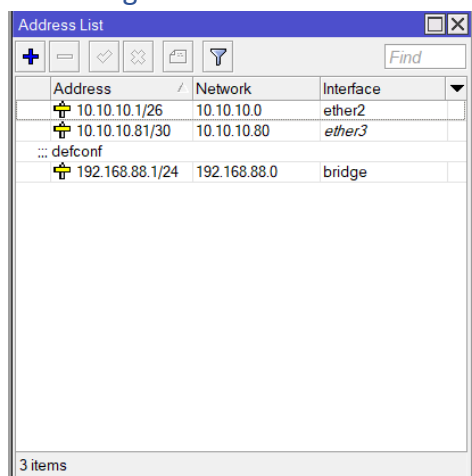


2. Konfigurasi Alamat IP Router 2

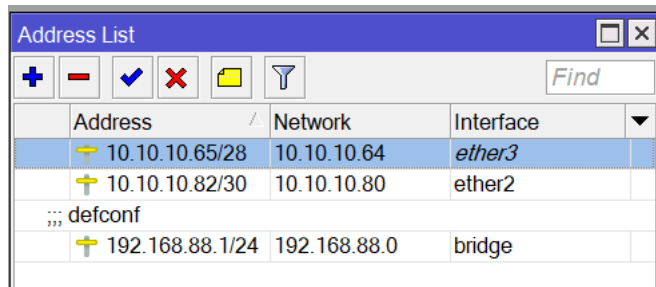


	Address	Network	Interface
	10.10.10.65/28	10.10.10.64	ether3
	10.10.10.82/30	10.10.10.80	ether2
... defconf			
	192.168.88.1/24	192.168.88.0	bridge

3. Konfigurasi Routing Statik R1 -> R2

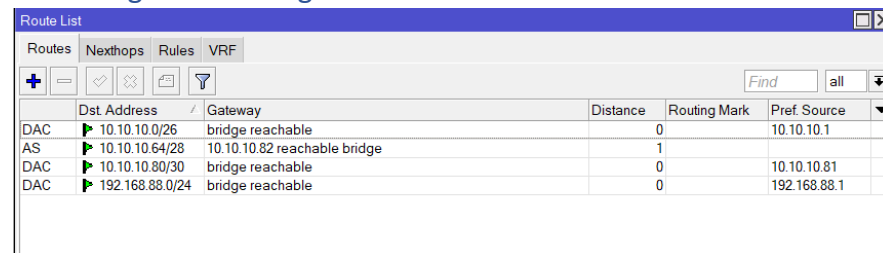

	Dst. Address	Gateway	Distance	Routing Mark	Pref. Source
DAC	10.10.10.0/26	bridge reachable	0		10.10.10.1
AS	10.10.10.64/28	10.10.10.82 reachable bridge	1		
DAC	10.10.10.80/30	bridge reachable	0		10.10.10.81
DAC	192.168.88.0/24	bridge reachable	0		192.168.88.1

4. Konfigurasi Routing Statik R2 -> R1

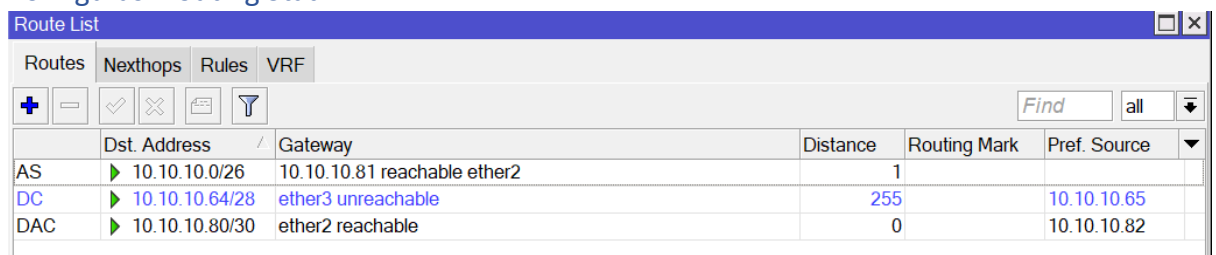

	Dst. Address	Gateway	Distance	Routing Mark	Pref. Source
AS	10.10.10.0/26	10.10.10.81 reachable ether2	1		
DC	10.10.10.64/28	ether3 unreachable	255		10.10.10.65
DAC	10.10.10.80/30	ether2 reachable	0		10.10.10.82

5. Hasil Ping LAN A Host 1 ke LAN B Host 2

```
C:\Users\hp>ping 10.10.10.2

Pinging 10.10.10.2 with 32 bytes of data:
Reply from 10.10.10.2: bytes=32 time=2ms TTL=126
Reply from 10.10.10.2: bytes=32 time=2ms TTL=126
Reply from 10.10.10.2: bytes=32 time=2ms TTL=126
Reply from 10.10.10.2: bytes=32 time=2ms TTL=126

Ping statistics for 10.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Users\hp>
```

```

C:\Users\ABED NEGO>ping 10.10.10.67

Pinging 10.10.10.67 with 32 bytes of data:
Reply from 10.10.10.67: bytes=32 time=2ms TTL=126
Reply from 10.10.10.67: bytes=32 time=2ms TTL=126
Reply from 10.10.10.67: bytes=32 time=1ms TTL=126
Reply from 10.10.10.67: bytes=32 time=2ms TTL=126

Ping statistics for 10.10.10.67:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\ABED NEGO>

```

6. IP Address Host di LAN A

```

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::d4fe:9dfb:29cb:bce0%4
    IPv4 Address. . . . . : 10.10.10.2
    Subnet Mask . . . . . : 255.255.255.192
    Default Gateway . . . . . : 10.10.10.1

```

7. IP Address Host di LAN B

```

C:\Users\hp>ping 10.10.10.67

Pinging 10.10.10.67 with 32 bytes of data:
Reply from 10.10.10.67: bytes=32 time<1ms TTL=128
Reply from 10.10.10.67: bytes=32 time<1ms TTL=128
Reply from 10.10.10.67: bytes=32 time<1ms TTL=128
Reply from 10.10.10.67: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.10.67:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\hp>

```

Hasil pinging ke E2/R1 (10.10.10.1/26)

```
C:\Users\ABED NEG0>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:
Reply from 10.10.10.1: bytes=32 time=1ms TTL=64
Reply from 10.10.10.1: bytes=32 time<1ms TTL=64
Reply from 10.10.10.1: bytes=32 time<1ms TTL=64
Reply from 10.10.10.1: bytes=32 time=1ms TTL=64

Ping statistics for 10.10.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\ABED NEG0>
```

Hasil Pinging ke E3/R2 (10.10.10.65/28)

```
C:\Users\hp>ping 10.10.10.65

Pinging 10.10.10.65 with 32 bytes of data:
Reply from 10.10.10.65: bytes=32 time<1ms TTL=64
Reply from 10.10.10.65: bytes=32 time<1ms TTL=64
Reply from 10.10.10.65: bytes=32 time<1ms TTL=64
Reply from 10.10.10.65: bytes=32 time<1ms TTL=64

Ping statistics for 10.10.10.65:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```