



KONFIGURASI 3 ROUTER

NAMA : BRILIAN ABEDNEGO WIRYAWAN
 KELAS : XI TJKT 1
 ABSEN : 6

1. TOPOLOGI

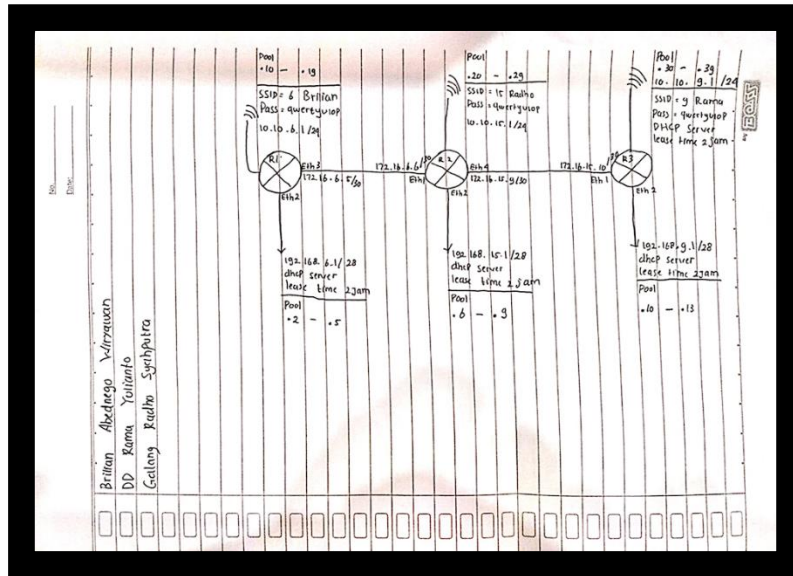

2. KONGFIGURASI

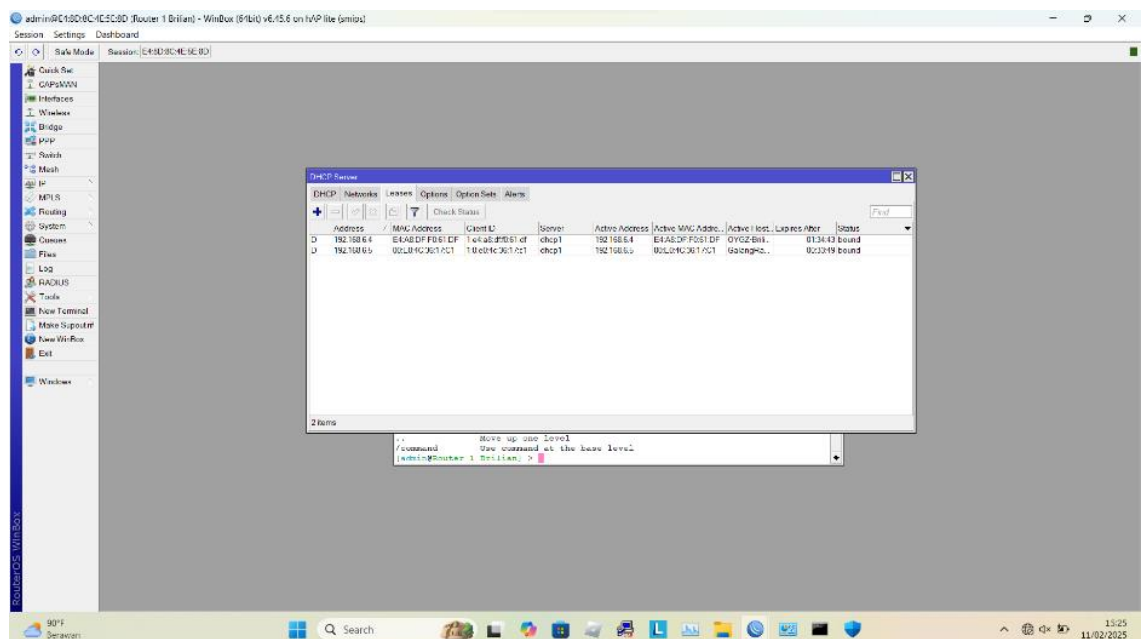

admin@F4:8D:8C:4E:5E:8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: F4:8D:8C:4E:5E:8D

RouterOS WinBox

Quick Set
CAPsMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supotrif
New WinBox
Exit

Windows

Route List

Routes	NextHops	Rules	VRF
DC	10.10.6.0/24	wlan1 unreachable	
AS	10.10.9.0/24	172.16.6.6 reachable ether3	
AS	10.10.15.0/24	172.16.6.6 reachable ether3	
DAC	172.16.6.4/30	ether3 reachable	
AS	172.16.15.0/30	172.16.6.6 reachable ether3	
DAC	192.168.6.0/28	ether2 reachable	
AS	192.168.9.0/28	172.16.6.6 reachable ether3	
AS	192.168.15.0/28	172.16.6.6 reachable ether3	

0 items

90°F
Berauan

Search

15:23
11/02/2025

admin@F4:8D:8C:4E:5E:8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: F4:8D:8C:4E:5E:8D

RouterOS WinBox

Quick Set
CAPsMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supotrif
New WinBox
Exit

Windows

DHCP Server

Name	Interface	Relay	Lease Time	Address Pool	Add ARL
dhcp1	ether2		02:00:00	eth 2	no
dhcp2	wlan1		02:00:00	wlan	no

2 items

90°F
Berauan

Search

15:22
11/02/2025

admin@C4-AD34-89:51:87 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4-AD34-89:51:87

Uptime: 01:49:39 Memory: 8.6 MB CPU: 1% Date: Feb/11/2025 Time: 15:21:31

Quick Set

CAPsMAN

Interfaces

Wireless

Bridge

PPP

Switch

Mesh

IP

MPLS

Routing

System

Queues

Files

Log

RADIUS

Tools

New Terminal

Make Screenshot

New WinBox

Exit

Windows

DHCP Server

DHCP

Networks

Leases

Options

Option Sets

Alerts

DHCP Config

DHCP Setup

Find

Name	Interface	Relay	Lease Time	Address Pool	Addr L.
dhcp1	wlan7		02:00:00 WAP		no
dhcp2	ether2		02:00:00 ETH 2		no

2 items

Windows Taskbar

15:22 11/02/2025

admin@C4-AD34-89:51:87 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4-AD34-89:51:87

Uptime: 01:48:45 Memory: 8.6 MB CPU: 2% Date: Feb/11/2025 Time: 15:20:37

Quick Set

CAPsMAN

Interfaces

Wireless

Bridge

PPP

Switch

Mesh

IP

MPLS

Routing

System

Queues

Files

Log

RADIUS

Tools

New Terminal

Make Screenshot

New WinBox

Exit

Windows

Address List

Find

Address	Network	Interface
10.10.15.124	10.10.15.0	wlan7
172.16.5.6/30	172.16.5.4	ether1
172.16.15.9/30	172.16.15.8	ether4
192.168.15.1/28	192.168.15.0	ether2

4 items (1 selected)

Windows Taskbar

15:21 11/02/2025

admin@C4AD:34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD:34895187

Update: 01:51:03 Memory: 8.9 MB CPU: 0% Date: Feb/11/2025 Time: 15:26:56

RouterOS WinBox

Quick Set CAPsMAN Interfaces Wireless Bridges PPP Switch Mesh IP MPLS Routing System Queues Files Log RADIUS Tools New Terminal Make Support.rtf New WinBox Exit Windows

Route List

Routes Neighbors Rules VRF

	Dist Address	Gateway	Distance	Routing Mark	Net Source
AS	10.10.6.0/24	172.16.6.5 reachable ether1	1		172.16.6.6
AS	10.10.9.0/24	172.16.15.10 reachable ether1	1		172.16.15.9
DAC	10.10.15.0/24	wlan1 reachable	0		10.10.15.1
DAC	172.16.6.4/30	ether1 reachable	0		172.16.6.6
DAC	172.16.15.8/30	ether1 reachable	0		172.16.15.9
AS	192.168.6.0/20	172.16.6.5 reachable ether1	1		172.16.6.6
AS	192.168.9.0/20	172.16.15.10 reachable ether1	1		172.16.15.9
DAC	192.168.15.0/20	ether2 reachable	0		192.168.15.1

0 items

admin@C4AD:34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD:34895187

Update: 01:52:55 Memory: 8.2 MB CPU: 0% Date: Feb/11/2025 Time: 15:26:47

RouterOS WinBox

Quick Set CAPsMAN Interfaces Wireless Bridges PPP Switch Mesh IP MPLS Routing System Queues Files Log RADIUS Tools New Terminal Make Support.rtf New WinBox Exit Windows

DHCP Server

DHCP Networks Leases Options Option Sets Alerts

Check Status

	Address	MAC Address	Client ID	Server	Active Address	Active MAC Address	Active Host Name	Expires After	Status
D	10.10.15.0	AE:65:A6:08:01:00	1 aa-bb-a6-08-01-0	dhcp1	10.10.15.20	AE:65:A6:08:01:00	Radho-9-Pro-9G	01:59:51	bound
D	192.168.15.9	08:E0:4C:38:17:C1	1 0-a0-4c-38-17-c1	dhcp2	192.168.15.9	08:E0:4C:38:17:C1	GalangRadho	01:34:19	bound

2 items

admin@C4-AD:34.8A:19:B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session C4-AD:34.8A:19:B6

Quick Set CAPsMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log RADIUS Tools New Terminal Make Screenshot New WinBox Exit Windows

DHCP Server

DHCP Networks Leases Options Option Sets Alerts

DHCP Config DHCP Setup

Name	Interface	Relay	Lease Time	Address Pool	Add AR
dhcp1	ether1		02:00:00	dhcp_pool0	no
dhcp2	ether2		02:00:00	dhcp_pool1	no

2 items

31°C Berawan 15:21 11/02/2025

admin@C4-AD:34.8A:19:B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session C4-AD:34.8A:19:B6

Quick Set CAPsMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log RADIUS Tools New Terminal Make Screenshot New WinBox Exit Windows

Address List

Address	Network	Interface
10.10.9.1/24	10.10.9.0	ether1
172.16.15.10/30	172.16.15.8	ether1
192.168.9.1/28	192.168.9.0	ether2

3 items

31°C Berawan 15:20 11/02/2025

admin@C4AD:34:8A:19:B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (omips)

Session Settings Dashboard

Safe Mode Session: C4AD:34:8A:19:B6

Quick Set

CAPsMAN

Interfaces

Wireless

Bridge

PPP

Switch

Mesh

IP

MPLS

Routing

System

Queues

Files

Log

RADIUS

Tools

New Terminal

Make Screenshot

New WinBox

Exit

Windows

Route List

Routes

Nextops

Rules

VRF

Find

all

	Dest Address	Gateway	Distance	Routing Mark	Pref	Source
AS	10.10.6.0/24	172.16.15.9 reachable ether1	1			172.16.15.10
DAC	10.10.9.0/24	wlan1 reachable	0			10.10.9.1
AS	10.10.15.0/24	172.16.15.9 reachable ether1	1			172.16.15.10
AS	172.16.6.0/30	172.16.15.9 reachable ether1	1			172.16.15.10
DAC	172.16.15.0/30	ether1 reachable	0			172.16.15.10
AS	192.168.6.0/28	172.16.15.9 reachable ether1	1			172.16.15.10
DAC	192.168.9.0/28	ether2 reachable	0			192.168.9.1
AS	192.168.15.0/28	172.16.15.9 reachable ether1	1			172.16.15.10

8 items

31°C

Berawan

15:26

11/02/2025

admin@C4AD:34:8A:19:B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (omips)

Session Settings Dashboard

Safe Mode Session: C4AD:34:8A:19:B6

Quick Set

CAPsMAN

Interfaces

Wireless

Bridge

PPP

Switch

Mesh

IP

MPLS

Routing

System

Queues

Files

Log

RADIUS

Tools

New Terminal

Make Screenshot

New WinBox

Exit

Windows

DHCP Server

DHCP

Networks

Leases

Options

Option Sets

Alerts

Find

Check Status

	Address	MAC Address	Client ID	Server	Active Address	Active MAC Address	Active Host	Expires After	Status
D	10.10.9.30	BA:C2:8D:53:5F:00	1-ba-c2-8d-53-5f-00	dhcp1	10.10.9.30	BA:C2:8D:53:5F:00	Redmi-14C	01:45:44	bound
D	10.10.9.39	BA:AF:8D:02:3E:DA	1-ba-af-8d-02-3e-da	dhcp1	10.10.9.39	BA:AF:8D:02:3E:DA		01:42:37	bound
D	192.168.9.13	EC:9A:9C:10:AF:5D	1-ec-9a-9c-10-af-5d	dhcp2	192.168.9.13	EC:9A:9C:10:AF:5D	Rama2007	01:58:55	bound

3 items

Hujan sebrentar

Kamis

15:41

11/02/2025

3. **TERMINAL PINGING**

admin@E4-8D-8C-4E-5E-8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E4-8D-8C-4E-5E-8D

Terminal <4>

```
MikroTik RouterOS 6.45.6 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous,
a second [Tab] gives possible options

/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 10.10.15.1

PING 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms

  0 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  1 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  2 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  3 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  4 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  5 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  6 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  7 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  8 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  9 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 10 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 11 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 12 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 13 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 14 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 15 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 16 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 17 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 18 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 19 10.10.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms

[admin@Router 1 Brilian] >
```

admin@E4-8D-8C-4E-5E-8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E4-8D-8C-4E-5E-8D

Terminal <3>

```
MikroTik RouterOS 6.45.6 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous,
a second [Tab] gives possible options

/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 192.168.15.1

PING 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms

  0 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  1 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  2 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  3 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  4 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  5 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  6 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  7 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  8 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
  9 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 10 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 11 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 12 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 13 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 14 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 15 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 16 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 17 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 18 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms
 19 192.168.15.1: 56 data bytes, 20 packets sent, 20 received, 0% packet loss, min-rtt=0ms, avg-rtt=0ms, max-rtt=0ms

[admin@Router 1 Brilian] >
```

admin@E4:8D:3C:4E:5E:8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E4:8D:3C:4E:5E:8D

Terminal<>

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Screenshot
New WinBox
Exit

MikroTik RouterOS 6.45.6 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 172.16.6.6

SRQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.6.6	56	64	0ms	
1	172.16.6.6	56	64	0ms	
2	172.16.6.6	56	64	0ms	
3	172.16.6.6	56	64	0ms	
4	172.16.6.6	56	64	0ms	
5	172.16.6.6	56	64	0ms	
6	172.16.6.6	56	64	0ms	
7	172.16.6.6	56	64	0ms	
8	172.16.6.6	56	64	0ms	
9	172.16.6.6	56	64	0ms	
10	172.16.6.6	56	64	0ms	
11	172.16.6.6	56	64	0ms	
12	172.16.6.6	56	64	0ms	
13	172.16.6.6	56	64	0ms	
14	172.16.6.6	56	64	0ms	
15	172.16.6.6	56	64	0ms	
16	172.16.6.6	56	64	0ms	
17	172.16.6.6	56	64	0ms	
18	172.16.6.6	56	64	0ms	
19	172.16.6.6	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 1 Brilian] > |

admin@E4:8D:3C:4E:5E:8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E4:8D:3C:4E:5E:8D

Terminal<>

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Screenshot
New WinBox
Exit

MikroTik RouterOS 6.45.6 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 172.16.15.5

SRQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.15.5	56	64	0ms	
1	172.16.15.5	56	64	0ms	
2	172.16.15.5	56	64	0ms	
3	172.16.15.5	56	64	0ms	
4	172.16.15.5	56	64	0ms	
5	172.16.15.5	56	64	0ms	
6	172.16.15.5	56	64	0ms	
7	172.16.15.5	56	64	0ms	
8	172.16.15.5	56	64	0ms	
9	172.16.15.5	56	64	0ms	
10	172.16.15.5	56	64	0ms	
11	172.16.15.5	56	64	0ms	
12	172.16.15.5	56	64	0ms	
13	172.16.15.5	56	64	0ms	
14	172.16.15.5	56	64	0ms	
15	172.16.15.5	56	64	0ms	
16	172.16.15.5	56	64	0ms	
17	172.16.15.5	56	64	0ms	
18	172.16.15.5	56	64	0ms	
19	172.16.15.5	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 1 Brilian] > |

admin@E43D3C4E5E8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on HAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E43D3C4E5E8D

Terminal

```

Mikrotik RouterOS 6.45.6 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous,
a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 10.10.9.1
PING: 10.10.9.1
 0 10.10.9.1 56 63 0ms
 1 10.10.9.1 56 63 0ms
 2 10.10.9.1 56 63 0ms
 3 10.10.9.1 56 63 0ms
 4 10.10.9.1 56 63 0ms
 5 10.10.9.1 56 63 0ms
 6 10.10.9.1 56 63 0ms
 7 10.10.9.1 56 63 0ms
 8 10.10.9.1 56 63 0ms
 9 10.10.9.1 56 63 0ms
10 10.10.9.1 56 63 0ms
11 10.10.9.1 56 63 0ms
12 10.10.9.1 56 63 0ms
13 10.10.9.1 56 63 0ms
14 10.10.9.1 56 63 0ms
15 10.10.9.1 56 63 0ms
16 10.10.9.1 56 63 0ms
17 10.10.9.1 56 63 0ms
18 10.10.9.1 56 63 0ms
19 10.10.9.1 56 63 0ms
sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 1 Brilian] >

```

88°F Barawan Search 15:45 11/02/2025

admin@E43D3C4E5E8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on HAP lite (smips)

Session Settings Dashboard

Safe Mode Session: E43D3C4E5E8D

Terminal

```

Mikrotik RouterOS 6.45.6 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous,
a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 1 Brilian] > ping 172.16.15.10
PING: 172.16.15.10
 0 172.16.15.10 56 63 0ms
 1 172.16.15.10 56 63 0ms
 2 172.16.15.10 56 63 0ms
 3 172.16.15.10 56 63 0ms
 4 172.16.15.10 56 63 0ms
 5 172.16.15.10 56 63 0ms
 6 172.16.15.10 56 63 0ms
 7 172.16.15.10 56 63 0ms
 8 172.16.15.10 56 63 0ms
 9 172.16.15.10 56 63 0ms
10 172.16.15.10 56 63 0ms
11 172.16.15.10 56 63 0ms
12 172.16.15.10 56 63 0ms
13 172.16.15.10 56 63 0ms
14 172.16.15.10 56 63 0ms
15 172.16.15.10 56 63 0ms
16 172.16.15.10 56 63 0ms
17 172.16.15.10 56 63 0ms
18 172.16.15.10 56 63 0ms
19 172.16.15.10 56 63 0ms
sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 1 Brilian] >

```

88°F Barawan Search 15:52 11/02/2025

admin@E43D8C4E5E8D (Router 1 Brilian) - WinBox (64bit) v6.45.6 on HAP lite (mips)

Session Settings Dashboard

Safe Mode Session: E43D8C4E5E8D

Quick Set

CAPMAN

Interfaces

Wireless

Bridge

PPP

Switch

Mesh

IP

MPLS

Routing

System

Queues

Files

Log

RADIUS

Tools

New Terminal

Make Screenshot

New WinBox

Exit

Windows

Terminal

Mikrotik RouterOS 6.45.6 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level
[admin@Router: 1 Brilian] > ping 192.168.9.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	192.168.9.1	56	63	0ms	
1	192.168.9.1	56	63	0ms	
2	192.168.9.1	56	63	0ms	
3	192.168.9.1	56	63	0ms	
4	192.168.9.1	56	63	0ms	
5	192.168.9.1	56	63	0ms	
6	192.168.9.1	56	63	0ms	
7	192.168.9.1	56	63	0ms	
8	192.168.9.1	56	63	0ms	
9	192.168.9.1	56	63	0ms	
10	192.168.9.1	56	63	0ms	
11	192.168.9.1	56	63	0ms	
12	192.168.9.1	56	63	0ms	
13	192.168.9.1	56	63	0ms	
14	192.168.9.1	56	63	0ms	
15	192.168.9.1	56	63	0ms	
16	192.168.9.1	56	63	0ms	
17	192.168.9.1	56	63	0ms	
18	192.168.9.1	56	63	0ms	
19	192.168.9.1	56	63	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router: 1 Brilian] > █

RouterOS WinBox

88°F
Berauan

Search

15:46
11/02/2025

admin@C4AD34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD34895187 Uptime: 02:18:17 Memory: 8.5 MB CPU: 3% Date: Feb/11/2025 Time: 15:50:09

Terminal< >

Quick Set CAP+MAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 2 Radho] > ping 10.10.9.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	10.10.9.1	56	64	0ms	
1	10.10.9.1	56	64	0ms	
2	10.10.9.1	56	64	0ms	
3	10.10.9.1	56	64	0ms	
4	10.10.9.1	56	64	0ms	
5	10.10.9.1	56	64	0ms	
6	10.10.9.1	56	64	0ms	
7	10.10.9.1	56	64	0ms	
8	10.10.9.1	56	64	0ms	
9	10.10.9.1	56	64	0ms	
10	10.10.9.1	56	64	0ms	
11	10.10.9.1	56	64	0ms	
12	10.10.9.1	56	64	0ms	
13	10.10.9.1	56	64	0ms	
14	10.10.9.1	56	64	0ms	
15	10.10.9.1	56	64	0ms	
16	10.10.9.1	56	64	0ms	
17	10.10.9.1	56	64	0ms	
18	10.10.9.1	56	64	0ms	
19	10.10.9.1	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 2 Radho] >

admin@C4AD34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD34895187 Uptime: 02:17:26 Memory: 8.5 MB CPU: 1% Date: Feb/11/2025 Time: 15:49:18

Terminal< >

Quick Set CAP+MAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 2 Radho] > ping 192.168.9.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	192.168.9.1	56	64	0ms	
1	192.168.9.1	56	64	0ms	
2	192.168.9.1	56	64	0ms	
3	192.168.9.1	56	64	0ms	
4	192.168.9.1	56	64	0ms	
5	192.168.9.1	56	64	0ms	
6	192.168.9.1	56	64	0ms	
7	192.168.9.1	56	64	0ms	
8	192.168.9.1	56	64	0ms	
9	192.168.9.1	56	64	0ms	
10	192.168.9.1	56	64	0ms	
11	192.168.9.1	56	64	0ms	
12	192.168.9.1	56	64	0ms	
13	192.168.9.1	56	64	0ms	
14	192.168.9.1	56	64	0ms	
15	192.168.9.1	56	64	0ms	
16	192.168.9.1	56	64	0ms	
17	192.168.9.1	56	64	0ms	
18	192.168.9.1	56	64	0ms	
19	192.168.9.1	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 2 Radho] >

admin@C4AD:34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD:34895187 Uptime: 02:10:45 Memory: 8.5 MB CPU: 1% Date: Feb/11/2025 Time: 15:42:37

Terminal< >

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Suptout
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router: 2 Radho] > ping 172.16.6.5

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.6.5	56	64	1ms	
1	172.16.6.5	56	64	0ms	
2	172.16.6.5	56	64	0ms	
3	172.16.6.5	56	64	0ms	
4	172.16.6.5	56	64	0ms	
5	172.16.6.5	56	64	0ms	
6	172.16.6.5	56	64	0ms	
7	172.16.6.5	56	64	0ms	
8	172.16.6.5	56	64	0ms	
9	172.16.6.5	56	64	0ms	
10	172.16.6.5	56	64	0ms	
11	172.16.6.5	56	64	0ms	
12	172.16.6.5	56	64	0ms	
13	172.16.6.5	56	64	0ms	
14	172.16.6.5	56	64	0ms	
15	172.16.6.5	56	64	0ms	
16	172.16.6.5	56	64	0ms	
17	172.16.6.5	56	64	0ms	
18	172.16.6.5	56	64	0ms	
19	172.16.6.5	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=1ms

[admin@Router: 2 Radho] >

admin@C4AD:34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD:34895187 Uptime: 02:15:57 Memory: 8.5 MB CPU: 1% Date: Feb/11/2025 Time: 15:47:49

Terminal< >

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Suptout
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router: 2 Radho] > ping 172.16.15.10

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.15.10	56	64	0ms	
1	172.16.15.10	56	64	0ms	
2	172.16.15.10	56	64	0ms	
3	172.16.15.10	56	64	0ms	
4	172.16.15.10	56	64	0ms	
5	172.16.15.10	56	64	0ms	
6	172.16.15.10	56	64	0ms	
7	172.16.15.10	56	64	0ms	
8	172.16.15.10	56	64	0ms	
9	172.16.15.10	56	64	0ms	
10	172.16.15.10	56	64	0ms	
11	172.16.15.10	56	64	0ms	
12	172.16.15.10	56	64	0ms	
13	172.16.15.10	56	64	0ms	
14	172.16.15.10	56	64	0ms	
15	172.16.15.10	56	64	0ms	
16	172.16.15.10	56	64	0ms	
17	172.16.15.10	56	64	0ms	
18	172.16.15.10	56	64	0ms	
19	172.16.15.10	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router: 2 Radho] >

admin@C4AD34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD34895187 Uptime: 02:13:40 Memory: 8.5 MB CPU: 0% Date: Feb/11/2025 Time: 15:45:32

Terminal< >

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Suptout
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 2 Radho] > ping 10.10.6.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	10.10.6.1	56	64	0ms	
1	10.10.6.1	56	64	0ms	
2	10.10.6.1	56	64	0ms	
3	10.10.6.1	56	64	0ms	
4	10.10.6.1	56	64	0ms	
5	10.10.6.1	56	64	0ms	
6	10.10.6.1	56	64	0ms	
7	10.10.6.1	56	64	0ms	
8	10.10.6.1	56	64	0ms	
9	10.10.6.1	56	64	0ms	
10	10.10.6.1	56	64	0ms	
11	10.10.6.1	56	64	0ms	
12	10.10.6.1	56	64	0ms	
13	10.10.6.1	56	64	0ms	
14	10.10.6.1	56	64	0ms	
15	10.10.6.1	56	64	0ms	
16	10.10.6.1	56	64	0ms	
17	10.10.6.1	56	64	0ms	
18	10.10.6.1	56	64	0ms	
19	10.10.6.1	56	64	0ms	
sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms					

[admin@Router 2 Radho] >

admin@C4AD34895187 (Router 2 Radho) - WinBox (64bit) v6.44.5 on hAP lite (smips)

Session Settings Dashboard

Safe Mode Session: C4AD34895187 Uptime: 02:12:48 Memory: 8.6 MB CPU: 1% Date: Feb/11/2025 Time: 15:44:40

Terminal< >

Quick Set
CAP-MAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Suptout
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 2 Radho] > ping 192.168.6.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	192.168.6.1	56	64	0ms	
1	192.168.6.1	56	64	0ms	
2	192.168.6.1	56	64	0ms	
3	192.168.6.1	56	64	0ms	
4	192.168.6.1	56	64	0ms	
5	192.168.6.1	56	64	0ms	
6	192.168.6.1	56	64	0ms	
7	192.168.6.1	56	64	0ms	
8	192.168.6.1	56	64	0ms	
9	192.168.6.1	56	64	0ms	
10	192.168.6.1	56	64	0ms	
11	192.168.6.1	56	64	0ms	
12	192.168.6.1	56	64	0ms	
13	192.168.6.1	56	64	0ms	
14	192.168.6.1	56	64	0ms	
15	192.168.6.1	56	64	0ms	
16	192.168.6.1	56	64	0ms	
17	192.168.6.1	56	64	0ms	
18	192.168.6.1	56	64	0ms	
19	192.168.6.1	56	64	0ms	
sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms					

[admin@Router 2 Radho] >

admin@C4AD:348A:19B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19B6

Terminal< >

RouterOS WinBox

Quick Set
CAPsMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supout/f
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 3 Rama] > ping 172.16.6.6

Seq	Host	Size	TTL	Time	Status
0	172.16.6.6	56	64	1ms	
1	172.16.6.6	56	64	0ms	
2	172.16.6.6	56	64	0ms	
3	172.16.6.6	56	64	0ms	
4	172.16.6.6	56	64	0ms	
5	172.16.6.6	56	64	0ms	
6	172.16.6.6	56	64	0ms	
7	172.16.6.6	56	64	0ms	
8	172.16.6.6	56	64	0ms	
9	172.16.6.6	56	64	0ms	
10	172.16.6.6	56	64	0ms	
11	172.16.6.6	56	64	0ms	
12	172.16.6.6	56	64	0ms	
13	172.16.6.6	56	64	0ms	
14	172.16.6.6	56	64	0ms	
15	172.16.6.6	56	64	0ms	
16	172.16.6.6	56	64	0ms	
17	172.16.6.6	56	64	0ms	
18	172.16.6.6	56	64	0ms	
19	172.16.6.6	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=1ms

[admin@Router 3 Rama] >

31°C
Berauan

15:58
11/02/2025

admin@C4AD:348A:19B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19B6

Terminal< >

RouterOS WinBox

Quick Set
CAPsMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supout/f
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 3 Rama] > ping 10.10.6.1

Seq	Host	Size	TTL	Time	Status
0	10.10.6.1	56	63	0ms	
1	10.10.6.1	56	63	0ms	
2	10.10.6.1	56	63	0ms	
3	10.10.6.1	56	63	0ms	
4	10.10.6.1	56	63	0ms	
5	10.10.6.1	56	63	0ms	
6	10.10.6.1	56	63	0ms	
7	10.10.6.1	56	63	0ms	
8	10.10.6.1	56	63	0ms	
9	10.10.6.1	56	63	0ms	
10	10.10.6.1	56	63	0ms	
11	10.10.6.1	56	63	0ms	
12	10.10.6.1	56	63	0ms	
13	10.10.6.1	56	63	0ms	
14	10.10.6.1	56	63	0ms	
15	10.10.6.1	56	63	0ms	
16	10.10.6.1	56	63	0ms	
17	10.10.6.1	56	63	0ms	
18	10.10.6.1	56	63	0ms	
19	10.10.6.1	56	63	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 3 Rama] >

31°C
Berauan

15:50
11/02/2025

admin@C4AD:348A:19:86 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19:86

Terminal< >

Quick Set CAPMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log RADUIS Tools New Terminal Make Supout/f New WinBox Exit

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
[?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router: 3 Rama] > ping 192.168.6.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	192.168.6.1	56	63	0ms	
1	192.168.6.1	56	63	0ms	
2	192.168.6.1	56	63	0ms	
3	192.168.6.1	56	63	0ms	
4	192.168.6.1	56	63	0ms	
5	192.168.6.1	56	63	0ms	
6	192.168.6.1	56	63	0ms	
7	192.168.6.1	56	63	0ms	
8	192.168.6.1	56	63	0ms	
9	192.168.6.1	56	63	0ms	
10	192.168.6.1	56	63	0ms	
11	192.168.6.1	56	63	0ms	
12	192.168.6.1	56	63	0ms	
13	192.168.6.1	56	63	0ms	
14	192.168.6.1	56	63	0ms	
15	192.168.6.1	56	63	0ms	
16	192.168.6.1	56	63	0ms	
17	192.168.6.1	56	63	0ms	
18	192.168.6.1	56	63	0ms	
19	192.168.6.1	56	63	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router: 3 Rama] >

admin@C4AD:348A:19:86 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19:86

Terminal< >

Quick Set CAPMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log RADUIS Tools New Terminal Make Supout/f New WinBox Exit

Mikrotik RouterOS 6.44.5 (c) 1999-2019 http://www.mikrotik.com/

[?] Gives the list of available commands
[?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router: 3 Rama] > ping 172.16.15.9

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.15.9	56	64	0ms	
1	172.16.15.9	56	64	0ms	
2	172.16.15.9	56	64	0ms	
3	172.16.15.9	56	64	0ms	
4	172.16.15.9	56	64	0ms	
5	172.16.15.9	56	64	0ms	
6	172.16.15.9	56	64	0ms	
7	172.16.15.9	56	64	0ms	
8	172.16.15.9	56	64	0ms	
9	172.16.15.9	56	64	0ms	
10	172.16.15.9	56	64	0ms	
11	172.16.15.9	56	64	0ms	
12	172.16.15.9	56	64	0ms	
13	172.16.15.9	56	64	0ms	
14	172.16.15.9	56	64	0ms	
15	172.16.15.9	56	64	0ms	
16	172.16.15.9	56	64	0ms	
17	172.16.15.9	56	64	0ms	
18	172.16.15.9	56	64	0ms	
19	172.16.15.9	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router: 3 Rama] >

admin@C4AD:348A:19B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19B6

Terminal< >

Quick Set
CAPMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supout.if
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level

[admin@Router 3 Rama] > ping 10.10.15.1

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	10.10.15.1	56	64	0ms	
1	10.10.15.1	56	64	0ms	
2	10.10.15.1	56	64	0ms	
3	10.10.15.1	56	64	0ms	
4	10.10.15.1	56	64	0ms	
5	10.10.15.1	56	64	0ms	
6	10.10.15.1	56	64	0ms	
7	10.10.15.1	56	64	0ms	
8	10.10.15.1	56	64	0ms	
9	10.10.15.1	56	64	0ms	
10	10.10.15.1	56	64	0ms	
11	10.10.15.1	56	64	0ms	
12	10.10.15.1	56	64	0ms	
13	10.10.15.1	56	64	0ms	
14	10.10.15.1	56	64	0ms	
15	10.10.15.1	56	64	0ms	
16	10.10.15.1	56	64	0ms	
17	10.10.15.1	56	64	0ms	
18	10.10.15.1	56	64	0ms	
19	10.10.15.1	56	64	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 3 Rama] >

31°C
Berauan

admin@C4AD:348A:19B6 (Router 3 Rama) - WinBox (64bit) v6.44.5 on hAP lite (mips)

Session Settings Dashboard

Safe Mode Session: C4AD:348A:19B6

Terminal< >

Quick Set
CAPMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues
Files
Log
RADIUS
Tools
New Terminal
Make Supout.if
New WinBox
Ext

Mikrotik RouterOS 6.44.5 (c) 1999-2019 <http://www.mikrotik.com/>

[?] Gives the list of available commands
command [?] Gives help on the command and list of arguments
[Tab] Completes the command/word. If the input is ambiguous, a second [Tab] gives possible options
/ Move up to base level
.. Move up one level
/command Use command at the base level


[admin@Router 3 Rama] > ping 172.16.6.5

SEQ	HOST	SIZE	TTL	TIME	STATUS
0	172.16.6.5	56	63	0ms	
1	172.16.6.5	56	63	0ms	
2	172.16.6.5	56	63	0ms	
3	172.16.6.5	56	63	0ms	
4	172.16.6.5	56	63	0ms	
5	172.16.6.5	56	63	0ms	
6	172.16.6.5	56	63	0ms	
7	172.16.6.5	56	63	0ms	
8	172.16.6.5	56	63	0ms	
9	172.16.6.5	56	63	0ms	
10	172.16.6.5	56	63	0ms	
11	172.16.6.5	56	63	0ms	
12	172.16.6.5	56	63	0ms	
13	172.16.6.5	56	63	0ms	
14	172.16.6.5	56	63	0ms	
15	172.16.6.5	56	63	0ms	
16	172.16.6.5	56	63	0ms	
17	172.16.6.5	56	63	0ms	
18	172.16.6.5	56	63	0ms	
19	172.16.6.5	56	63	0ms	

sent=20 received=20 packet-loss=0% min-rtt=0ms avg-rtt=0ms max-rtt=0ms

[admin@Router 3 Rama] >

31°C
Berauan

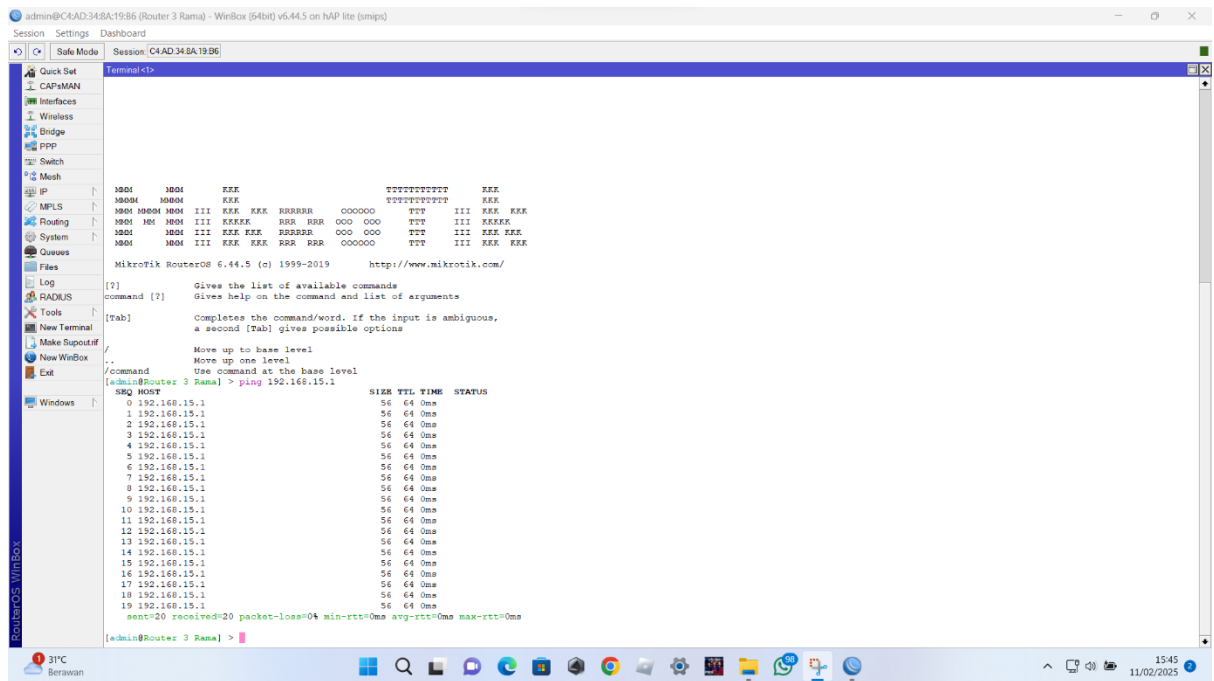

SEKIAN TERIMAKASIH.