

Developer Guide for IPC Outbound

V 2.0.10

Updated: 09/01/2026

Contents

Revision History	3
Introduction	4
Reference	4
How It Works	4
Security	5
Authorization	5
Failed Delivery.....	5
Service Rules	5
User Assignment Rules.....	5
Message Delivery Service.....	6
Message Synchronization	6
IERCC	6
JSON Refresher	6
Event Schema Versions	7
Event Schema V2.....	7
Event Schema V3.....	8
Event Schema V4.....	9
Message Codes Table.....	9
Example Events	10
Example Text Message.....	10
Example Media Message	11
Web Service	12
Request Content	12
Example Free Text Content.....	12
Example Binary Content.....	13
Example Binary Content V4	13
JSON Format Differences When Using Encrypted Messaging	13
Response	13
Device to Device Messaging with IPC	14

Revision History

Date	Version	Description	Author
2011-12-07	0.0.1	Draft Version Ready	EBS
2012-01-17	0.0.5	Added Revision History	EBS
2012-02-17	0.0.6	Change timestamp description from milliseconds to seconds	EBS
2012-03-09	1.0.0	Locked down the final revision of the interface	CAR
2012-04-04	1.0.1	Updated retry back off schema and added pre-canned messages.	EBS
2012-04-20	1.0.2	Edited	BG
2013-05-21	1.0.3	Added new message codes and examples	EBS, SBK
2013-06-11	1.1	Added pingback feature and updated examples	AJA
2013-08-05	1.1.1	Added message code for Canned messages	SBK
2014-06-11	1.1.2	Merged in "Device to Device Messaging" document	MDG
2014-07-30	1.1.3	Added GenericBinary message code	MDG
2014-10-21	1.2	Added EncryptedPinpoint message code	MDG
2015-01-26	1.3	Correct notification information; update copyright and TOC	MDG
2015-04-03	1.4	Updated information about pause / retry / suspend schedule	NDD
2015-05-22	1.5	Updating event info to include resetDetected	DH
2015-11-10	1.6	Added new Battery Status	DH
2018-12-18	2.0	Validated Documentation / Garminized	JL
2019-03-15	2.0.1	Link correction	
2020-12-15	2.0.2	Link correction	
2021-11-17	2.0.3	Remove reference to outdated encryption document	SRN
2022-06-29	2.0.4	Update with new IPC Outbound information	
2024-02-28	2.0.5	Add v3 and v4 schema	
2024-11-27	2.0.6	Add version downgrade rule	
2025-02-25	2.0.7	Add timestamp on Binary message on Event schema V4	
2025-09-08	2.0.8	Add encryption related messages for Event schema V4	
2026-04-17	2.0.9	Update IMEI with Internet Messages when user has multiple devices	
2026-09-01	2.0.10	Cleanup	NRW

Introduction

IPC Outbound is an inReach data push service for professional and enterprise inReach customers. The service uses web standards to relay messages sent from an inReach device to a web service. Each message is represented as an **Event** using an efficient JSON schema. JSON is a text based open standard for representing simple data structures. The messages are pushed to the web service using HTTP.

Reference

The latest IPC Documentation is available online at the following locations.

IPC Inbound: https://developer.garmin.com/inReach/IPC_Inbound.pdf

IPC Outbound: https://developer.garmin.com/inReach/IPC_Outbound.pdf


How It Works

The Garmin data push service requires end users to set up a web service to handle incoming HTTP POST requests from the Garmin gateway. The POST requests occur when messages are received from registered inReach devices. The messages are queued in the Garmin gateway, then relayed to the web service. The relayed content contains information about the inReach message that was sent.

The relay period is near real-time. This means that as soon as the message has been received from the Iridium GSS (Gateway SBD Subsystem) it will be relayed to the end user's web service.

Every HTTP request should receive a response from the web service. Successful requests should respond with code 200. Anything else will be considered a failed delivery. When a failure occurs, the message is queued and then retried. Repeated failures will cause the system to wait longer between tries. Please see [Failed Delivery](#) for more information about the retry schema.

The image below is a simplified diagram of the request and expected response.

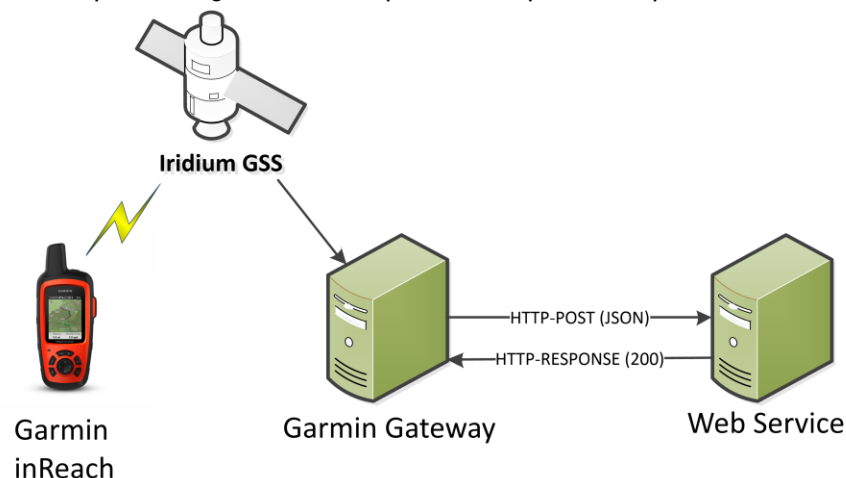

Security

All HTTP POST data can be encrypted using HTTPS (Hypertext Transfer Protocol Secure). HTTPS is the use of HTTP over an encrypted connection. To use this service, the server administrator must create a signed public key certificate for the web server. The certificate should be signed by a trusted authority. All certificates are validated.

Authorization

Customers can configure their own authorization method by setting an OAuth client ID, client secret and OAuth URL to authenticate against. The service will generate and use an OAuth token. Alternately, the customer can specify a static authorization token that will be included in HTTP headers.

Failed Delivery

If the initial delivery attempt fails, the HTTP-POST will be retried. Subsequent failures will result in the service waiting longer between retries. The service will retry after 2, 4, 8, 16, 32, 64, and 128 seconds.

If the service experiences errors sending data to the customer server for a period of 12 hours continuously, it will pause all attempts to deliver data for the subsequent 12 hours. An email will be sent to the customer containing notification of this event along with a list of recent errors. The first email will come after 30 minutes if their listener is malfunctioning or not sending messages. Subsequent messages are sent every 12 hours. Additional diagnostic and debugging information may be found under the “Portal Connect” section of <https://explore.garmin.com>.

This cycle of attempting to send messages for 12 hours, and then pausing for another 12 hours will be repeated 5 times (5 days). Any successful message sent to the customer server during an attempt window will reset the cycle back to a “normal” state. Email notifications will be sent to the customer every time the service pauses.

If at the end of 5 days there have been no successful message deliveries to the customer server, the IPC service will suspend itself and no more messages will be delivered to the customer. Garmin Technical Support must be contacted to resume IPC delivery.

At any point in time, if the customer’s IPC queue contains messages older than 5 days, it will discard messages from the queue until it reaches a message under 5 days old.

Service Rules

IPC Outbound allows professional and enterprise customers the choice of whether or not to assign a device to a user. Special rules have been developed around how services function when users are not assigned to devices. These rules include how message relay, device synchronization and IERCC work. Below is a table that defines which services are enabled when a user is assigned to the device.

User Assignment Rules		
Service	Assigned	Not Assigned

Message Delivery	Enabled	Disabled
Device Synchronization	Enabled	Disabled
IERCC	Enabled	Disabled

Message Delivery Service

The Garmin enterprise website has a robust set of services for sending and receiving SMS and SMTP messages to the recipients of an inReach message. Users can opt out of automatic message delivery by not assigning a device.

Message Synchronization

The Garmin inReach utilizes an extremely optimized protocol for Over-the-Air communications. The optimizations compress the number of bytes used per message. A key feature of the protocol is the employment of synchronized data. Synchronizing data allows the protocol to encode a long text string to 1 byte or less. This is used to shorten fields such as contact, message, and puck message.

When a user is assigned to the device, IPC Outbound makes synchronization transparent. The service automatically translates from the encoded value to the matching string before forwarding the message via the Outbound POST request.

This feature can be disabled by not assigning a user to the device. In this configuration, IPC Outbound will not translate the encoded values. Instead, it will pass the encoded values in the appropriate fields. For example, instead of receiving an IPC Outbound message addressed to john.smith@email.com, the address will simply be the number 24. It is up to the receiving service to make the translation.

IERCC

Customers may opt to utilize IERCC Search and Rescue. Please note that a user must be assigned to the device to enable IERCC.

JSON Refresher

The IPC Outbound request (HTTP POST) will contain content that describes a message using JSON. Below is a short refresher on the JSON data format.

Structures in JSON are either name/value pairs or an ordered list of values. A value can be a string, number, object, array, true, false or null. String values are wrapped in double quotation marks ("example"). Object values begin with a left brace ({) and end with a right brace (}). Arrays begin with a left square bracket ([) and end with a right square bracket (]).

Below is an example of JSON. The names are the value types. For example the value for **String** is the string, "This is a string". The value of **Number** is the number 12345 (notice the missing quotation marks). The value of **ObjectArray** is an array of objects. Each object contains a **name** and **value**.

```
{
  "String" : "This is a string",
```

```

    "Number" : 12345,
    "Boolean" : true,
    "ObjectArray" : [
      { "name" : "one" },
      { "name " : "two" }
    ]
  }

```

Please refer to RFC 4627 at <https://datatracker.ietf.org/doc/html/rfc4627> for more details.

Event Schema Versions

The event schema version can be configured on the inReach "Portal Connect" webpage at <https://explore.garmin.com>. Downgrading is permitted to the earliest version previously used by the customer.

Event Schema V2

The root object contains the string "Version" and an "Events" array of objects. The version is used to distinguish between different iterations of the object. Updates to the JSON schema will be reflected in the version string.

The "Events" array can contain one or more event objects from different inReach devices. An event is defined as a single transmission of data from an inReach to the Garmin gateway. Each event is linked to a specific inReach device by the device's International Mobile Equipment Identity or IMEI. An IMEI is a unique 15-digit identifier for each inReach. In the [example](#), there is one event from inReach device 100000000000001. Events contain information about telemetry, type, status, and free text. More descriptive definitions of the values in the event object can be found below.

Name	Type	Description
Version	String	The current schema version. Changes to this schema will be reflected in this name/value pair.
Events	Array	An array of event objects. An event is defined as a single transmission of data from an inReach to the Garmin gateway.

The event object has the following structure.

Name	Type	Description
imei	String	The inReach IMEI/s. An IMEI is a number that uniquely identifies each inReach device. It is usually 15 digits. For this implementation it is expressed as a string. In case the message is sent via Internet from an account that has associated multiple devices, it will contain all the imeis for that account (comma-separated string).
messageCode	Number	The type of message. Definitions are in the Message Codes Table on the next page.
freeText	String	The text that was sent by the inReach. This can be empty if nothing was sent.

timeStamp	Number	The time that the message was created. This is in milliseconds since EPOCH (January 1, 1970).
pingbackReceived	Number	The time that the pingback request was received on IPCInbound. This is in milliseconds since EPOCH (January 1, 1970).
pingbackResponded	Number	The time that the pingback response was constructed on IPCOutbound. This is in milliseconds since EPOCH (January 1, 1970).
addresses	Array	An array of addresses.
point	Object	Describes the location of the message. Values are filled with 0 when there is no location information.
status	Object	inReach status information
payload	String	Base64 encoded binary data.

The address array contains objects with the following structure.

Name	Type	Description
address	String	An address can be a SMS phone number, email address or synchronized contact. Please see Message Synchronization for more information about synchronized contacts.

The point object contains the following structure.

Name	Type	Description
latitude	Number	The latitude that the message originated from in decimal degrees. Calculated using the WGS84 datum.
longitude	Number	The longitude that the message originated from in decimal degrees. Calculated using the WGS84 datum.
altitude	Number	The height in meters.
gpsFix	Number	No Fix = 0, 2D Fix = 1, 3D Fix = 2, 3D Fix+ = 3
course	Number	True Course over ground expressed in degrees.
speed	Number	Speed over ground in kilometers per hour.

The status object contains the following structure.

Name	Type	Description
autonomous	Number	A value of 1 indicates the message originated from an inReach. 0 indicates the message originated from a paired device and was then sent by the inReach.
lowBattery	Number	Indication that the inReach battery is below 25%. A value of 1 indicates that the inReach battery is low. The value 0 means that the battery is not low. The value 2 indicates that the battery status was not reported on this message.
intervalChange	Number	The change in the SOS or tracking interval in seconds. 0 indicates that the interval has not change. Anything greater than 0 indicates a change in interval. (600 = 10 minutes)
resetDetected	Number	A value of 1 indicates that a factory reset has occurred on the inReach. A value of 0 indicates that no factory reset has occurred.

Event Schema V3

Version 3.0 adds information about the way the message was sent. There are two options available: Satellite or Internet. This information is visible through transportMode field.

Name	Type	Description
transportMode	String	The way the message was sent. It can be Satellite or Internet.

Event Schema V4

Version 4.0 adds information about the media file sent with the message. The new fields are **mediaId**, **mediaBytes**, **mediaType** and **transcription** (if available).

The new values have the following structure:

Name	Type	Description
mediaBytes	String	Base64 binary data containing the media file content
mediaId	Guid	Unique identifier for the media file
mediaType	String	Mime type for the file. Possible values: image/avif or audio/ogg
transcription	String	Audio file transcription. Available only if mediaType is audio/ogg

Message Codes Table

Code	Name	Description
0	Position Report	Drops a breadcrumb while tracking.
1	Reserved	Reserved for later use.
2	Locate Response	Position for a locate request.
3	Free Text Message	Message containing a free-text block.
4	Declare SOS	Declares an emergency state.
5	Reserved	Reserved for later use.
6	Confirm SOS	Confirms an unconfirmed SOS.
7	Cancel SOS	Stops a SOS event.
8	Reference Point	Shares a non-GPS location.
10	Start Track	Begins a tracking process on the server.
11	Track Interval	Indicates changes in tracking interval.
12	Stop Track	Ends a tracking process on the server.
13	Unknown Index	Used when the device receives a message from the server addressed to a synced contact identifier that is not on the device.
14	Puck Message 1	Sends the first of three inReach message button events.
15	Puck Message 2	Sends the second of three inReach message button events.
16	Puck Message 3	Sends the third of three inReach message button events.
17	Map Share	Sends a message to the shared map.
20	Mail Check	Sent to determine if any messages are queued for the device.
21	Am I Alive	Sent when the device needs to determine if it is active. This message is automatically replied to by the Garmin server to indicate the current status of the device.
24 - 63	Pre-defined Message	The index for a text message that is synchronized with the server.
64	Encrypted Binary	An encrypted binary Earthmate message.
65	Pingback Message	A pingback response message (initiated through IPCInbound).
66	Generic Binary	An uninterpreted binary message.
67	EncryptedPinpoint	A fully-encrypted inReach message.

68	EncryptionNegotiation	Sent by the device during the process of negotiating a new set of encryption keys. *v4
69	EncryptionNack	Sent by the device when it has issues with the encrypted traffic (e.g. receiving unencrypted traffic, key gets corrupted, etc.) *v4
3099	Canned Message	A Quicktext message, potentially edited by the user.

*v4 messages are only sent starting with event schema V4. Clients using older schema will **not** receive these messages

Example Events

Example Text Message

Below is an example of a single request. The request **Version** is 2.0 and the **Events** array contains one event.

The event is a text message, **messageCode 3**, with the message, **"On my way."** The event was created on Tuesday, December 13, 2011 at 8:56AM UTC. The message is addressed to two recipients. The first is to the SMS phone number **2075752244** and the second is to the email address **product.support@garmin.com**.

The message originated from latitude **43.807** and longitude **-70.16355**, at which point the device was moving **northeast** at **50 kilometers per hour**.

The **lowBattery** status is 1. This indicates that the battery is below 20%.

```
{
  "Version": "2.0",
  "Events": [
    {
      "imei": "100000000000001",
      "messageCode": 3,
      "freeText": "On my way.",
      "timeStamp": 1323784607376,
      "addresses": [
        { "address": "2075752244" },
        { "address": "product.support@garmin.com" }
      ],
      "point": {
        "latitude": 43.8078653812408,
        "longitude": -70.1636695861816,
        "altitude": 45,
        "gpsFix": 2,
        "course": 45,
        "speed": 50
      },
      "status": {
```

```

        "autonomous": 0,
        "lowBattery": 1,
        "intervalChange": 0,
        "resetDetected": 0
    }
}
]
}

```

Example Media Message

Below is an example of a single request with an audio file. The request **Version** is 4.0 and the **Events** array contains one event. (The mediaBytes value is truncated because the file is very large).

```

{
  "Version": "4.0",
  "Events": [
    {
      "imei": "100000000000001",
      "mediaBytes":
        "T2dnUwACAAAAAAAAACYPXZVAAAAA0vw5FoBE09wdXNIZWFkAQE4AcBdAAAAAABPZ2dTAAAAA
        AAAAAJg9dlUBAAAAAus...",
      "mediaId": "01082758-4cfb-451d-a273-2e4bf462c37d",
      "mediaType": "audio/ogg",
      "transcription": "This is an audio message",
      "messageCode": 3,
      "freeText": "On my way.",
      "timeStamp": 1323784607376,
      "addresses": [
        { "address": "2075752244" },
        { "address": "product.support@garmin.com" }
      ],
      "point": {
        "latitude": 43.8078653812408,
        "longitude": -70.1636695861816,
        "altitude": 45,
        "gpsFix": 2,
        "course": 45,
        "speed": 50
      },
      "status": {
        "autonomous": 0,
        "lowBattery": 1,
        "intervalChange": 0,
        "resetDetected": 0
      }
    }
  ]
}

```

Web Service

Garmin uses HTTP POST to relay inReach data traffic. You must set up a HTTP 1.1/HTTP 2.0 web service to receive this data.

Request Content

The content of each HTTP POST is a JSON object. The object describes one or more inReach events. The content type is application/json and the length of the content is equal to the number of bytes in the JSON object. Below are examples.

POST / xxxx.xxx HTTP/1.1

Content-Type: application/json

Content-Length: The length in bytes of the JSON object

Example Free Text Content

```
{
  "Version": "2.0",
  "Events": [
    {
      "imei": "100000000000001",
      "messageCode": 3,
      "freeText": "Hello World",
      "timeStamp": 1323784607376,
      "pingbackReceived": null,
      "pingbackResponded": null,
      "addresses": [],
      "point": {
        "latitude": 43.8078653812408,
        "longitude": -70.1636695861816,
        "altitude": 45,
        "gpsFix": 2,
        "course": 45,
        "speed": 50
      },
      "status": {
        "autonomous": 0,
        "lowBattery": 0,
        "intervalChange": 0,
        "resetDetected": 0
      }
    }
  ]
}
```

Example Binary Content

```
{
  "Version": "2.0",
  "Events": [
    {
      "payload": "VGhlIGZvcmlIGlzlIHN0cm9uZyB3aXRoIHRoaXMgb251Lg==",
      "imei": "300234010571020",
      "messageCode": 64,
      "status": {
        "lowBattery": 0
      }
    }
  ]
}
```

Example Binary Content V4

For Event Schema V4, binary messages (message code 64, 66, 67) include a timestamp. That timestamp represents the time the MO message was sent from the device.

```
{
  "Version": "4.0",
  "Events": [
    {
      "transportMode": "Satellite",
      "payload": " VGhlIGZvcmlIGlzlIHN0cm9uZyB3aXRoIHRoaXMgb251Lg==",
      "imei": "300052030105900",
      "messageCode": 66,
      "timeStamp": 1740406683953,
      "status": {
        "lowBattery": 0
      }
    }
  ]
}
```

JSON Format Differences When Using Encrypted Messaging

If Encrypted Messaging has been enabled for the devices on an account, a different formatter is used to create the JSON data. With Encrypted Messaging enabled, *null* values are not transmitted, and any properties with *null* values will not appear in the object. When Encrypted Messaging is disabled, properties with *null* values will appear.

Response

The web service should respond to HTTP POST sessions with a response code. A response code of 200 is considered a success. Anything else is considered a failure.

Status Code	Description
-------------	-------------

200	OK – The session was successful
400	Bad Request – The session was unsuccessful

Device to Device Messaging with IPC

An important aspect of IPC is to allow for messages to be sent between two inReach devices without requiring explore.garmin.com user accounts. A message is routed to another user's device when the recipient of a message is in the format joe@inreach.{yourdomain}.com.

When the Garmin gateway receives a message whose destination email is at the subdomain inreach.{yourdomain}.com, the message is forwarded via IPC Outbound to the enterprise web service without sending an email. The enterprise customer's web service is then responsible for mapping the email address to an IMEI and using IPC Inbound to send the message to the recipient. If the email address cannot be mapped to an IMEI, the web service should send a response to the sender informing them.

To facilitate this, the customer must enter the subdomain they wish to use into the inReach Portal Connect web page of explore.garmin.com. It is recommended that the format of the email address and the subdomain name be kept as short as reasonably possible.

The gateway will filter out messages addressed to a registered enterprise subdomain, and not send emails.