EBDS

WIRELESS & ANTENNAS

Antenne 2G/3G/4G directionnelle

Sirio

SMP-4G-LTE-5

EXPERT ET SPÉCIALISTE DES SOLUTIONS DE COMMUNICATION SANS FIL

TYPICAL S.W.R. RESPONSE

S.W.R. Model: SMP 4G LTE (measured w/10cm cable) File: F-04-022

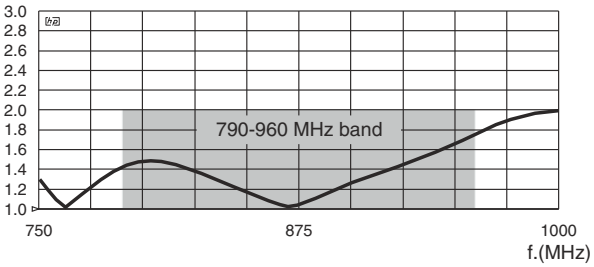

TYPICAL S.W.R. RESPONSE

S.W.R. Model: SMP 4G LTE (measured w/10cm cable) File: F-04-022

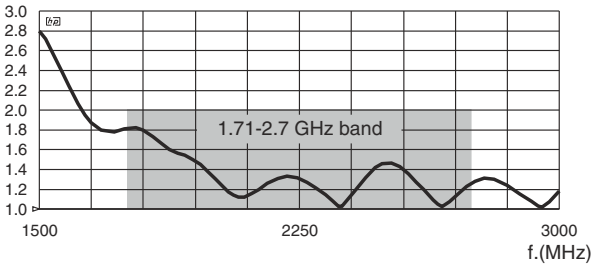

TYPICAL RADIATION PATTERN at 875 MHz

File: E-04-022 Scale: logarithmic

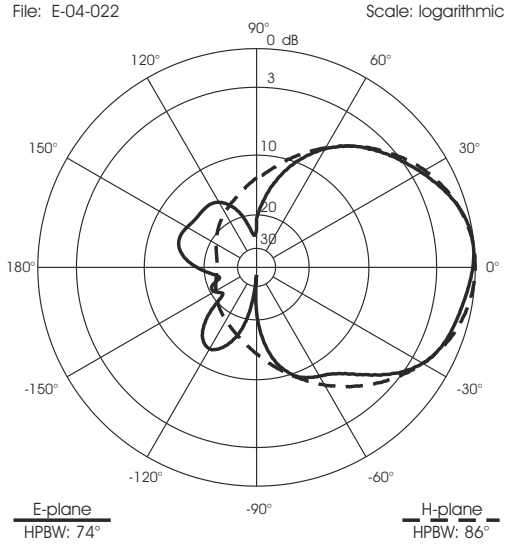

TYPICAL RADIATION PATTERN at 1795 MHz

File: E-04-022 Scale: logarithmic

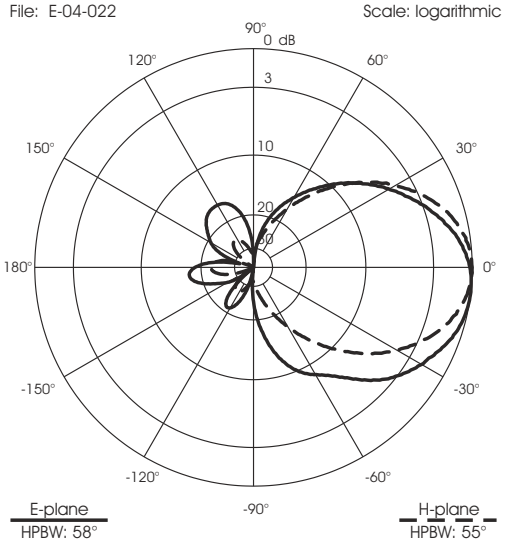

TYPICAL RADIATION PATTERN at 2045 MHz

File: E-04-022 Scale: logarithmic

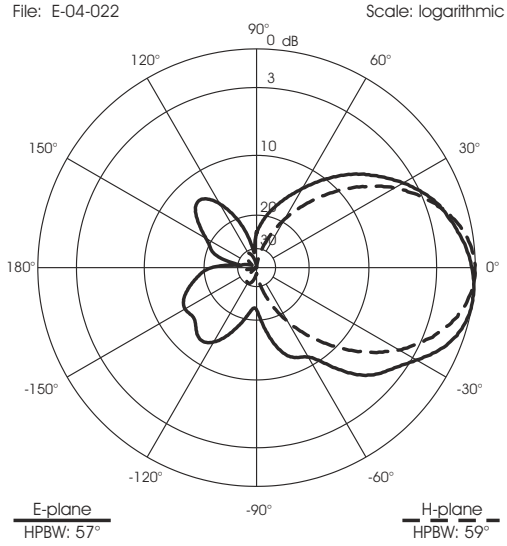

TYPICAL RADIATION PATTERN at 2500 MHz

File: E-04-022 Scale: logarithmic

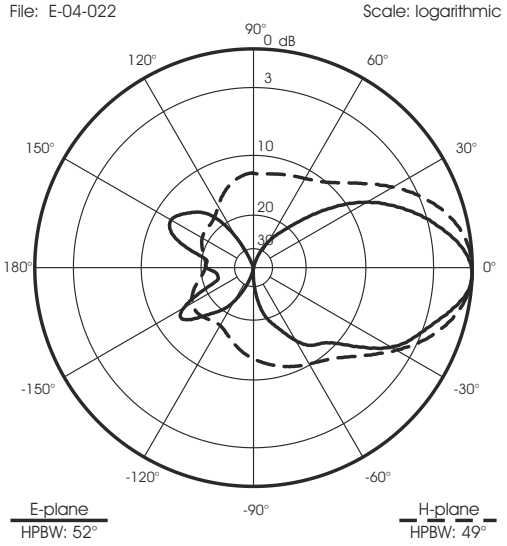

SIRIO antenne®

HI-QUALITY ANTENNAS MADE IN ITALY

© Copyright SIRIO antenne - Technical Data are subjected to change - Printed in ITALY - Rev. 16/06/2016 - Cod. ID445

SPECIFICATIONS

Electrical Data

Type	Directional mini panel wideband	
Frequency Range	790-960 MHz & 1710-2700 MHz @ SWR ≤ 2	
Impedance	50 Ω	
Half Power Beam Width	see Typical Radiation Patterns	
Polarization	Linear Vertical	
Gain	LTE 800 & GSM	6÷7 dBi @ 790-960 MHz;
	DCS	9 dBi @ 1710-1880 MHz;
	UMTS	9 dBi @ 1920-2170 MHz
	LTE & WLAN	8÷9 dBi @ 2300-2700 MHz
Front to back ratio	LTE 800 & GSM	≥ 12 dB @ 790-960 MHZ;
	DCS	≥ 16 dB @ 1710-1880 MHz;
	UMTS	≥ 20 dB @ 1920-2170 MHz
	LTE & WLAN	≥ 10 dB @ 2300-2700 MHz
Max Power @ 30°C	LTE 800 & GSM	30 Watts (CW) @ 790-960 MHZ;
	DCS	15 Watts (CW) @ 1710-1880 MHz;
	UMTS	10 Watts (CW) @ 1920-2170 MHz
	LTE & WLAN	10 Watts (CW) @ 2300-2700 MHz
Cable Type / Length	50 Ω LOW LOSS / 30 cm (other length on request)	
Connector	SMA-male (other type on request)	

Mechanical Data

Materials	RAL 7035 Light Grey thermoplastic UV stabilized, galvanized steel
Wind Load @150 km/h	40 N
Wind Resistance	180 Km/h
Wind Surface	0.02 m^2
Operating temperature	-40°C to + 80°C
Dimensions (approx.)	154 x 134 x 46 mm without bracket
Weight (approx.)	500 gr
Installation Type	Mast: Ø25-42 mm with U-bolt (included) Wall: mounting screw (not included)

SIRIO antenne® HI-QUALITY ANTENNAS MADE IN ITALY

ID445

NOS MARQUES

NOS COORDONNÉES

T : 09 72 36 76 46

E : info@ebds.eu
W : www.ebds.eu

340 rue A. Bergès
38330 Montbonnot - France