



# CONTRACTOR'S RESPONSIBILITY

Erosion and Sedimentation controls are performance based criteria. If the BMPs provided do not prevent soils from leaving a construction site, then the Contractor is required to employ additional procedures to provide clean runoff from a site.

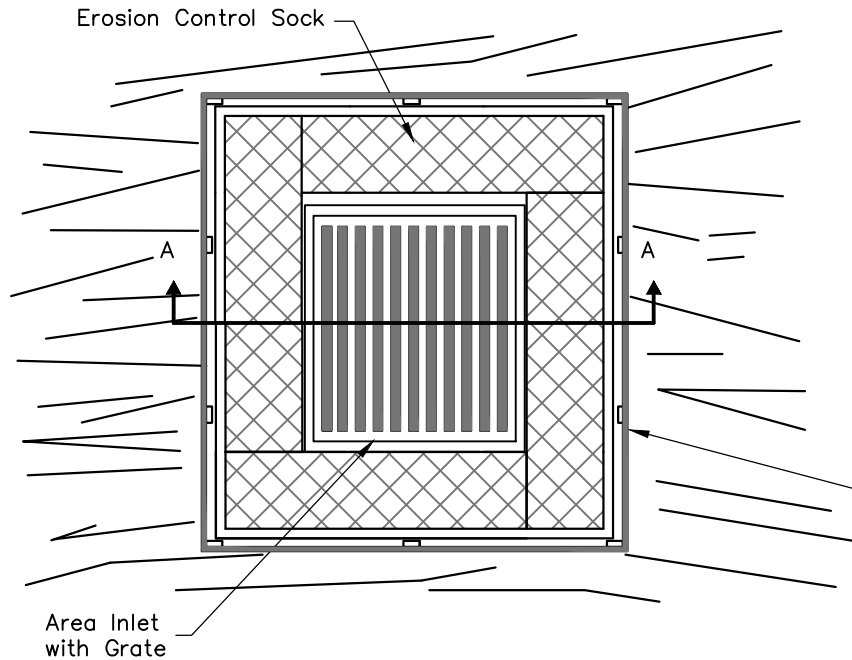

**PLAN VIEW**  
N.T.S.

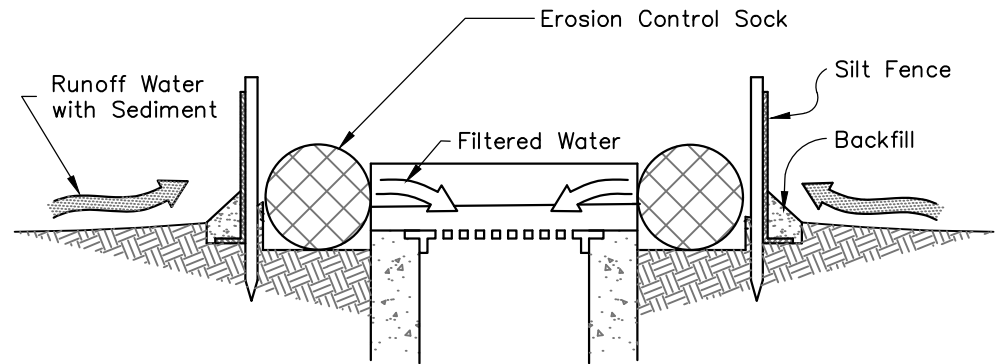

**SECTION A-A**  
N.T.S.

Silt fence is to be installed around synthetic bales. See Index No. 607

This method of inlet protection is applicable where the inlet drains a relatively flat area (slopes no greater than 5%) where sheet or overland flows (not exceeding 0.5 cfs) are typical. The method shall not apply to inlets receiving concentrated flows, such as street or highway medians.

5/18/15	CONTRACTOR NOTE ADDED	S.R.
DATE	REVISION DESCRIPTION	APP

**CITY OF CLEARWATER**  
ENGINEERING DEPARTMENT  
**EROSION AND SILTATION**  
CONTROL POLICY

**TEMPORARY SEDIMENT BARRIER**  
**AT STORM DRAIN DROP INLET**

INDEX NO.	PAGE NO.
608	2 OF 2
LATEST REVISION	2/22/2016