
Roadway/Sidewalk Installation

Green Space Installation

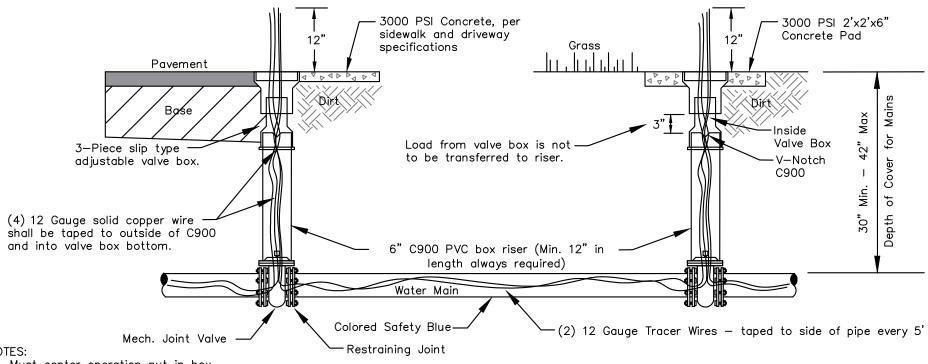

NOTES:

Must center operation nut in box.

- C900 Riser to be one continuous section and color coded "Safety Blue."
- 3. Gate Valves shall be open left only.
- 4. Valve key extensions required on valves with operator nut over 3' deep.
- 5. Tracer Wire required in all applications including on D.I.P. and colored "Safety Blue."
- 6. See also City of Clearwater's Technical Specification Section IV.

CITY OF CLEARWATER ENGINEERING DEPARTMENT POTABLE WATER **DETAILS**

TYPICAL VALVE AND BOX SETTING

INDEX NO.	PAGE NO.
402	1 or 3
LATEST 1	0/21/2019

APP DATE REVISION DESCRIPTION