


PLAN VIEW


N.T.S.

Notes:

1. Place Cleanout Every 200' From Inlet
2. All Cleanouts are 8" Only.
3. Cleanout Faces Upstream.

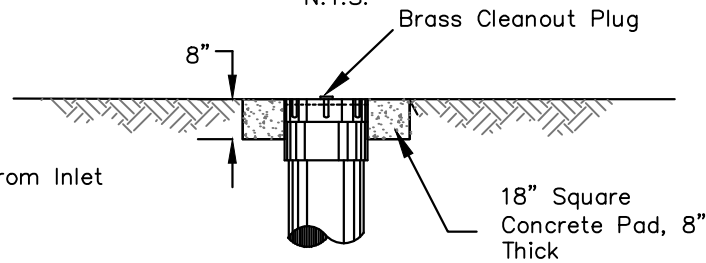

ASTM D3034-SDR 35 8" PVC
Underdrain (Refer to Plans for
Diameter)

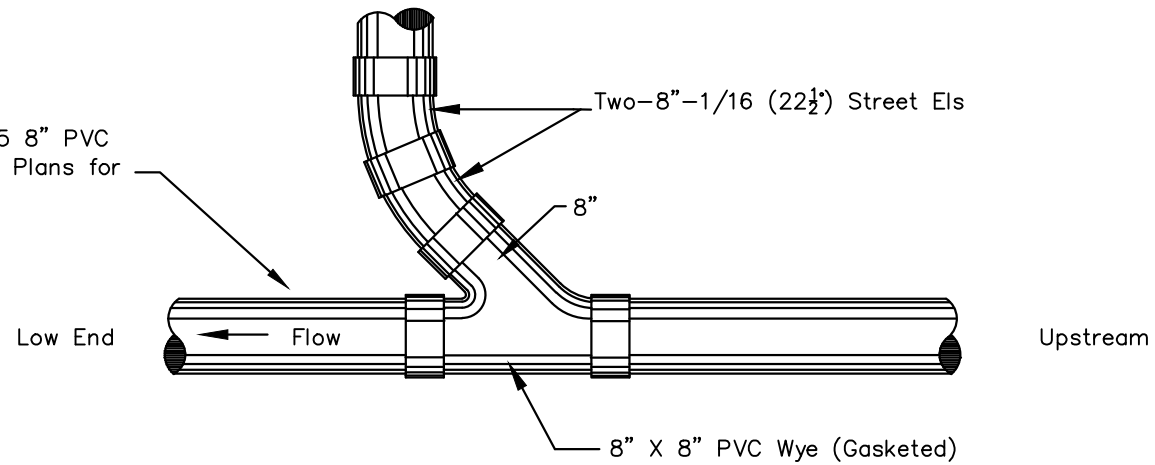

SECTION VIEW

N.T.S.

6/3/15	CORRECTION TO NOTES	S.R.
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
**STORM
DETAILS**

**STANDARD UNDERDRAIN CLEANOUT
(STORM)**

INDEX NO.	PAGE NO.
218	3 OF 4
LATEST REVISION	2/22/2016