


RING — HALF PLAN

N.T.S.

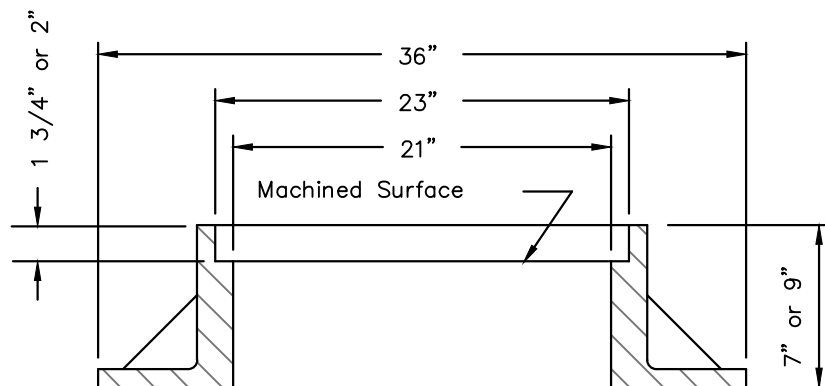


RING SECTION

N.T.S.

Minimum Weight 7" 232 lbs.
9" 278 lbs.


NOTES

1. Where roadway base is 8" or thicker use 9" ring, all other cases 7" ring is permissible.
2. Manufacturers model of storm ring and cover to be approved by City Engineer.
3. Perforated covers, when required shall be similar to solid covers.

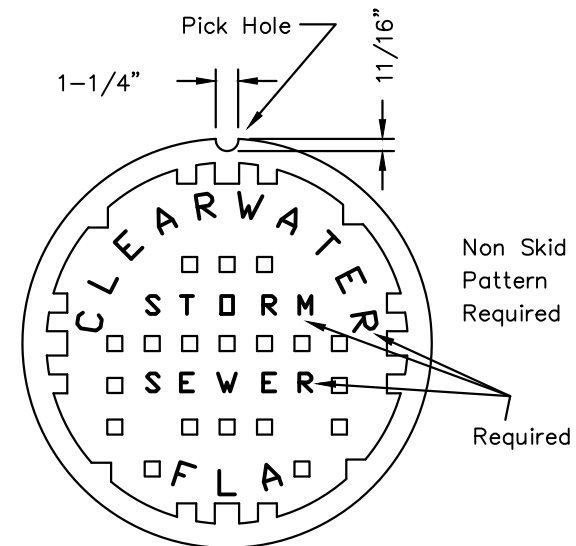

SOLID COVER

N.T.S.

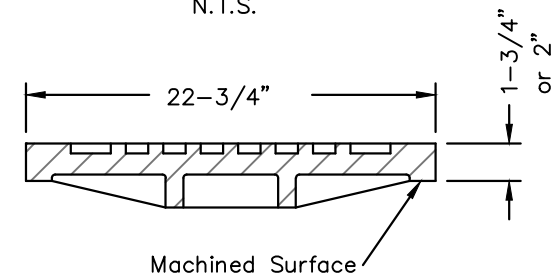

SOLID COVER SECTION

N.T.S.

Minimum Weight 128 lbs.

6/2/15	TITLE CHANGE	S.R.
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
**STORM
DETAILS**

**STORM SEWER MANHOLE
RING & COVER
TRAFFIC AREAS**

INDEX NO.	PAGE NO.
201	1 OF 1
LATEST REVISION	2/22/2016