




NOTE:

Concrete to be 3000 P.S.I., with fiber mesh reinforcing.

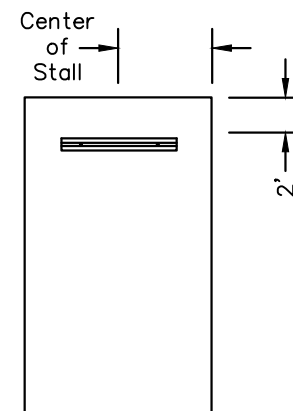

NOTES:

1. Wheel stops to be placed 2' back, as shown above. centered in the parking stall.
2. Wheel stops can be painted in a contrasting color.

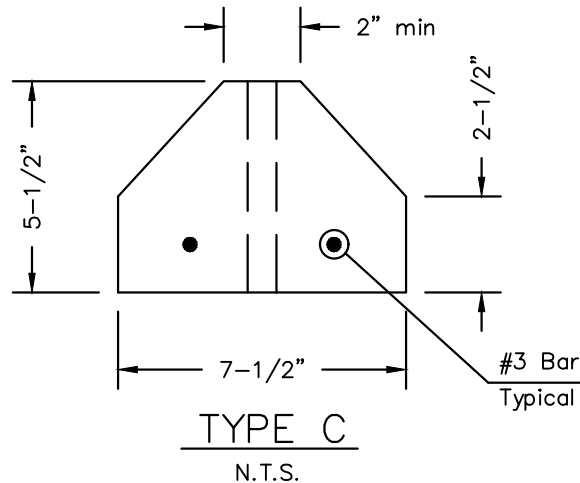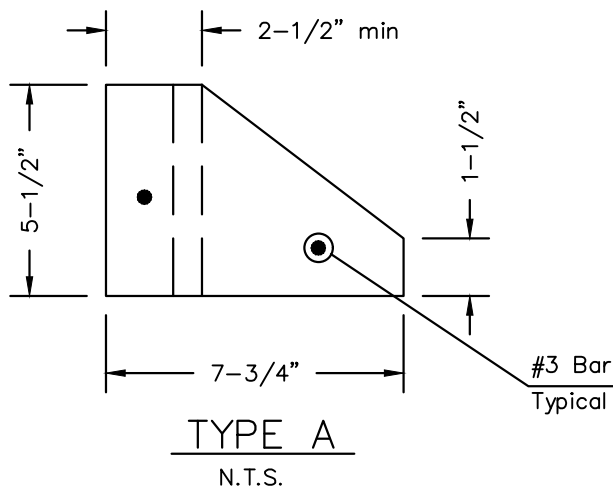

5/18/15	NOTES EDITED	S.R.
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
STREET SECTIONS
AND DETAILS

WHEEL STOPS - REINFORCED CONCRETE

INDEX NO.	PAGE NO.
117	1 OF 1
LATEST REVISION	2/22/2016