


Non Skid
Pattern
Required

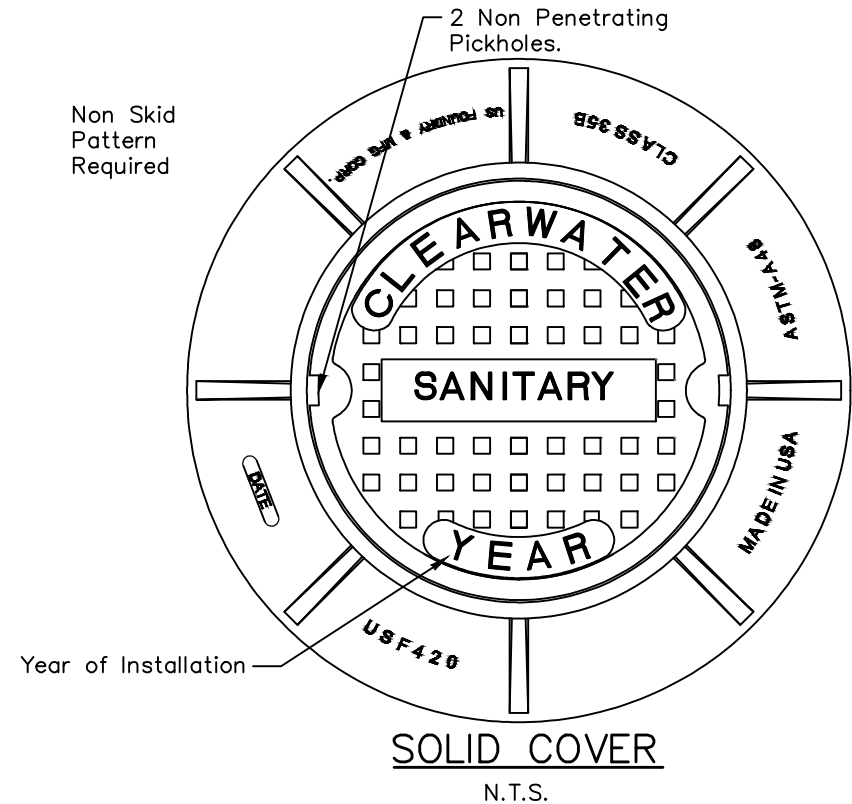

NOTES:

1. Where roadway base is 8" or thicker, use 9" ring.
2. Manufacturer's model USF 420 Ring & G Cover, or equal, if approved by City of Clearwater Engineer.
3. Heavy Traffic (Multi-lane) with cover located in travel lane will require ring and cover by EJ Group ERGO Assembly, Product Number 00104083L0 or equal, See Index 301 Page 3 of 3.
4. Private manhole covers must not say "Clearwater" on them.
5. Ring must be centered on opening.
6. Install 18 gauge 304 stainless steel manhole storm water inflow abatement insert (dish/pan).
7. See also City of Clearwater's Technical Specification Section IV.

| | | |
|------|----------------------|-----|
| | | |
| DATE | REVISION DESCRIPTION | APP |

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
**SANITARY SEWER
DETAILS**

**SANITARY SEWER MANHOLE COVER
FOR ROADWAY APPLICATION**

| | |
|-----------------|------------|
| INDEX NO. | PAGE NO. |
| 301 | 2 OF 3 |
| LATEST REVISION | 10/21/2019 |