


NOTES:

1. All wood shall be spruce or pine, not pressure treated.
2. Cross ties shall not cross over woody roots.
3. Remove all string &/or wire wrapped around trunk.
4. Remove all straps, ropes, wire, &/or strings used to lift the rootball.
5. Remove all burlap &/or wire from the top of the root ball.
6. Top of rootball to be set 3"-4" above surrounding finish grade.

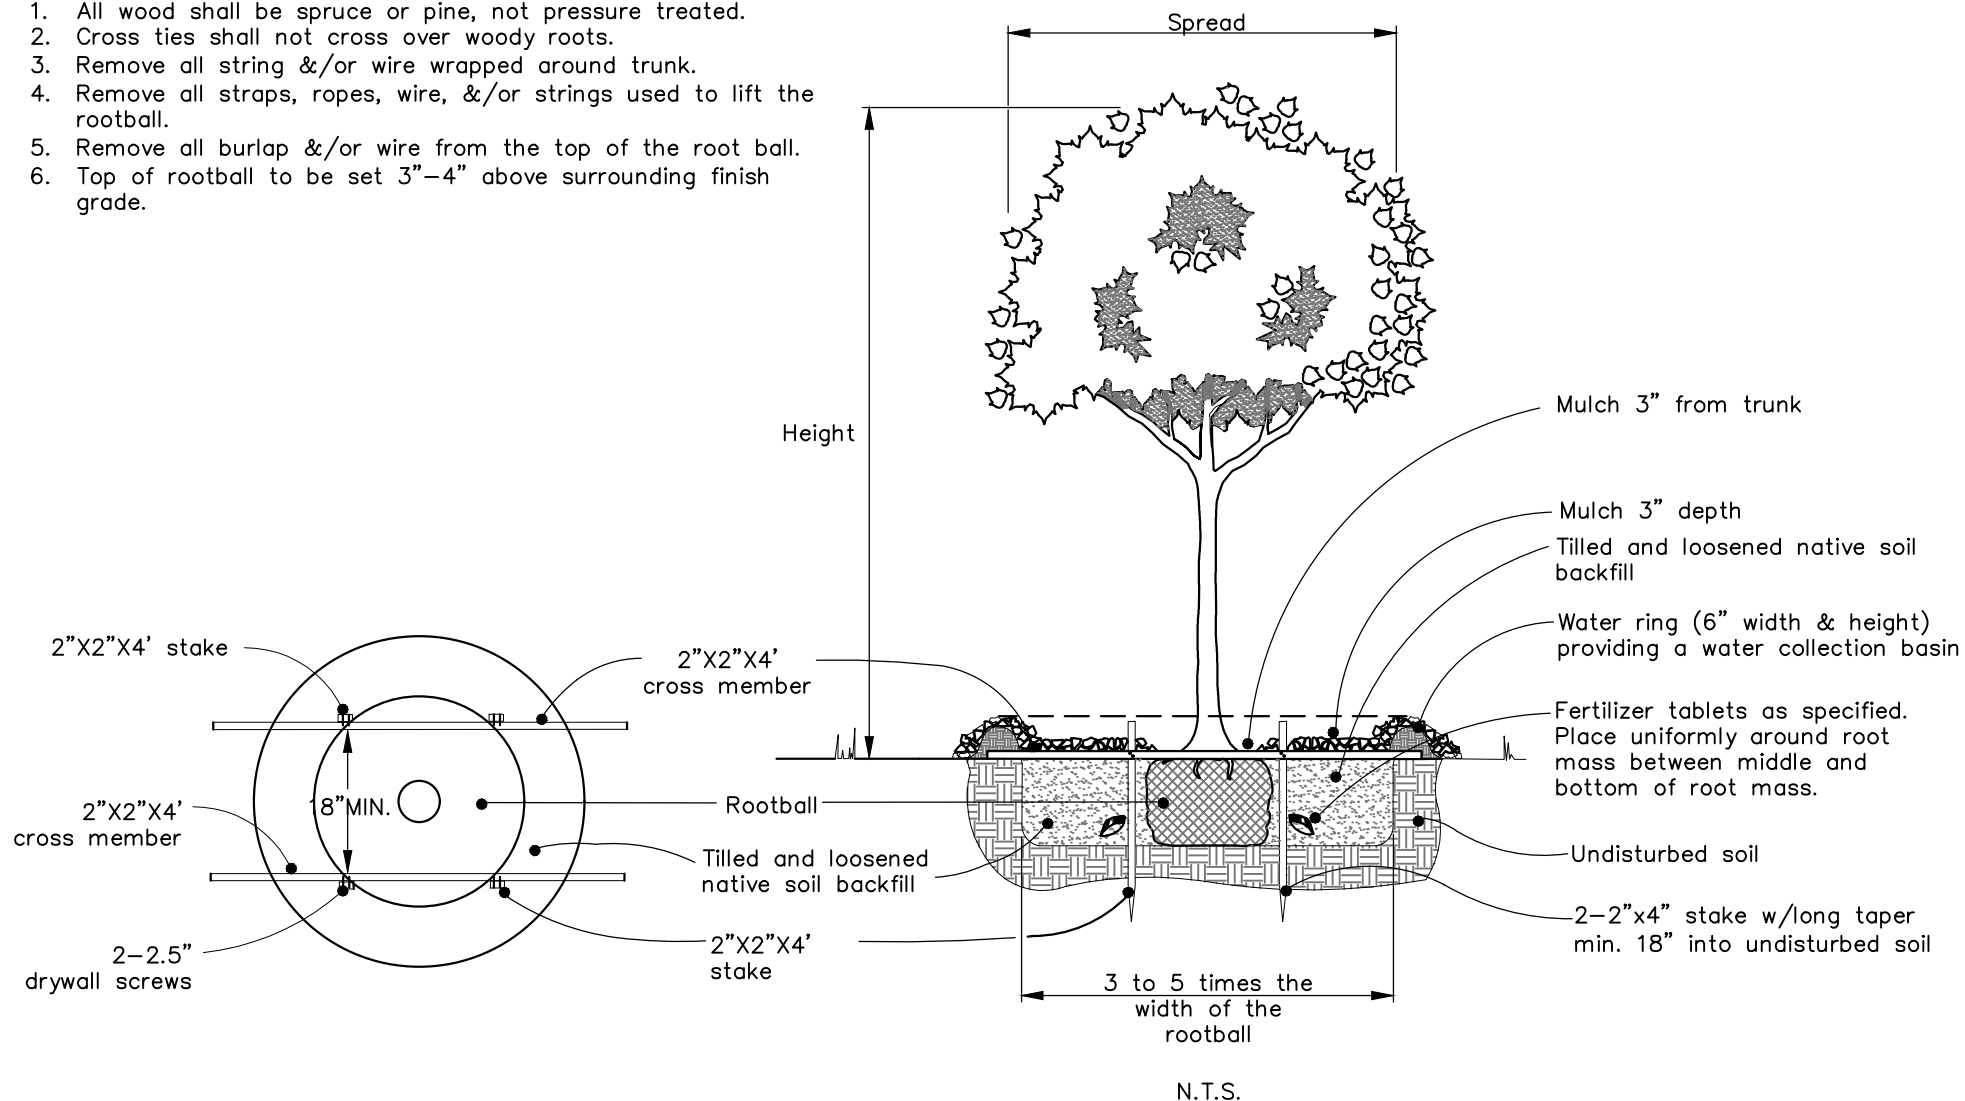

8/06	ADDITIONS & CORRECTIN	TMK
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
LANDSCAPE
DETAILS

TREE PLANTING DETAIL

INDEX NO.	PAGE NO.
908	1 OF 1
LATEST REVISION	2/22/2016