


2 AND 3 LANE STREET

N.T.S.

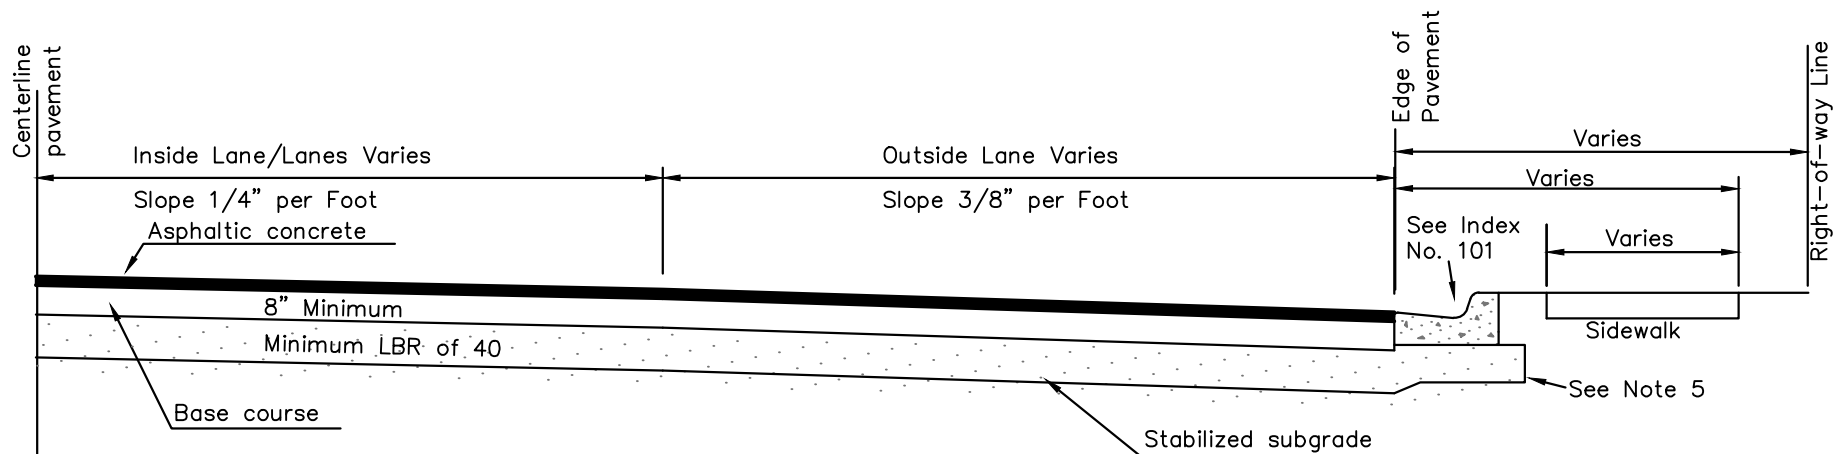

4 AND 5 LANE STREET

N.T.S.

NOTES:

1. Pavement materials and thickness, and base materials and thickness will be stated in construction drawings and scope of the work.
2. See construction drawings for curb type and lane widths.
3. See Section IV, 702 for acceptable base and subgrade materials
4. Refer to Index No. 109 and/or FDOT Detail 304 for Sidewalk criteria. The more stringent criteria will be required.
5. Stabilized subgrade shall be a minimum of 9" for neighborhood streets and a minimum of 12" for all other streets.

2/24/17	ADDED NOTE	JWS
9/9/15	ADDED SIDEWALKS & ROW DETAIL TO DRAWING	J.S.
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
STREET SECTIONS
AND DETAILS

TYPICAL STREET
SECTION

INDEX NO.	PAGE NO.
102	1 OF 1
LATEST REVISION	02/24/17