
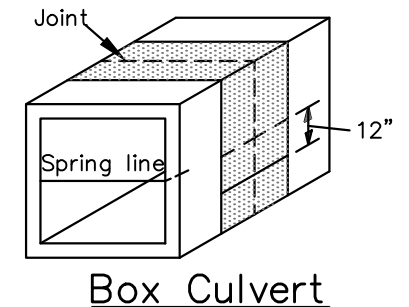
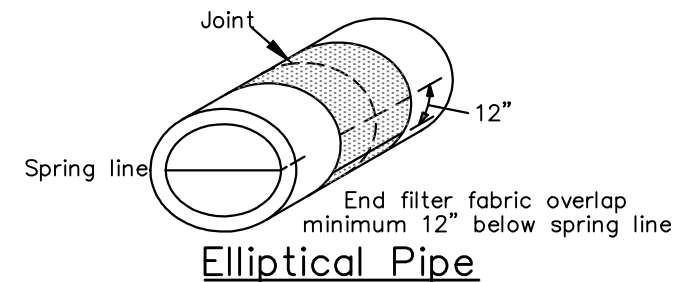


NOTES:

1. Joint wrap shall conform to one of the following: Filter Fabric—Mirafi 140—N as manufactured by Mirafi Inc., or approved equal. Minimum width(s) as shown above. Elastic band as manufactured by Cadillac External Pipe Joint, Inc., or approved equal. Width(s) as per ASTM C 877.
2. Joint wrap shall be held in place as follows: Filter Fabric—minimum 2 straps as shown or as required by the manufacturer.
3. Gasket type shall conform to pipe manufacturer specifications.

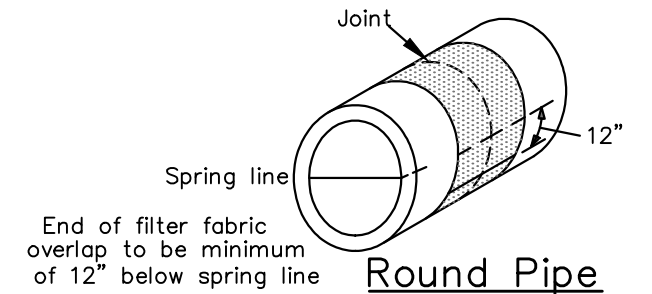

Isometric Views (Showing filter fabric)

6/3/15	REV. NOTES	S.R.
DATE	REVISION DESCRIPTION	APP

CITY OF CLEARWATER
ENGINEERING DEPARTMENT
STORM
DETAILS

CONDUIT JOINT WRAP DETAIL

INDEX NO.	PAGE NO.
227	1 OF 1
LATEST REVISION	2/22/2016