

Backward Inclined Belt Drive Utility Blowers

BI SERIES

Flexible utility blower with
multiple discharge positions




**AVAILABLE WITH MOTORS &
DRIVES Factory installed.**
Consult Delair Software for details

FEATURES

- Complete range of sizes from 10" to 36".
- Full AMCA Class 1 Operation.
- Non-overloading backward inclined (BI) welded wheels.
- Aluminum wheel - (AMCA type B classification for spark resistant construction) - available as an option.
- Aluminum wheels only on BI-30 to BI-36.
- Discharge position can be field rotated to any of 8 discharge positions.
- Counter clock wise rotation is standard. Clock wise available.
- Outlet flanges on models BI-24 to BI-36.
- Temperature Ratings - without a heat slinger 250° F with a heat slinger, steel wheel 400° F, aluminum wheel 300° F.
- Motor access from 3 sides.
- Sloped motor base for ease of motor installation.
- Vented motor and drive compartment cover, with handles, for safety & weather protection.
- 16 gauge or heavier blower housing.
- Heavy duty pillow block ball bearings.

RELATED MODEL



BI-RM
Utility blower for
cooking vapours



**SIMPLE TO REMOVE COVER AND
MULTIPLE SIDE ACCESS PROVIDE EASY
MAINTENANCE.**


ACCESSORIES

- V-Cap
- Bolted Clean Out Door
 - Heat Slinger
- Vibration Isolators
 - Shaft Seal
- Corrosion Resistant Coating
 - Aluminum Wheel
 - Back Draft Dampers
 - Inlet & Outlet Screens
 - 2" Drain Fitting



BI SERIES Belt Drive Utility Blowers

DIMENSIONS

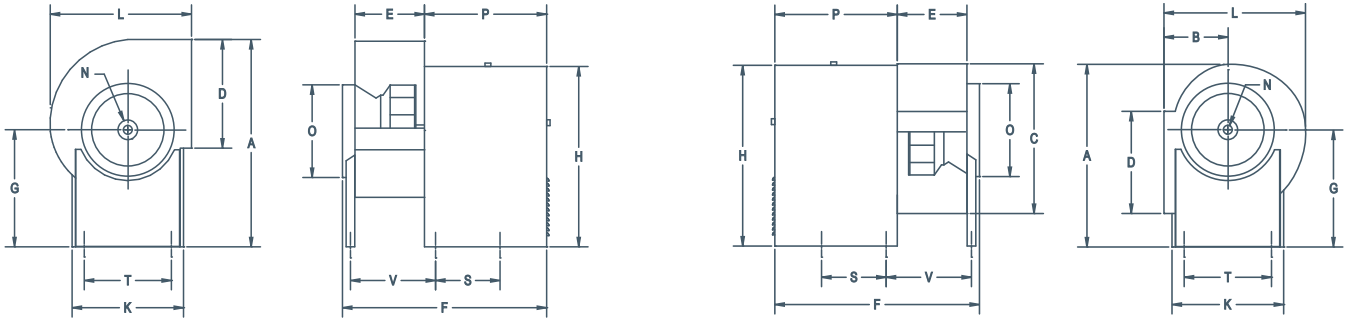

MODELS BI-10 TO BI-27
(STANDARD TOP HORIZONTAL DISCHARGE)

MODELS BI-30 TO BI-36
(STANDARD BOTTOM HORIZONTAL DISCHARGE)

MODEL	A (STANDARD MODELS)	A (BI-RM MODELS)	B	C	D	E	F	G	H	K (CABINET WIDTH)	L	N	O	P	S	T	V	WEIGHT (lbs) without motors
BI-10	26 3/4"	23 5/8"	8 3/8"	19 3/16"	11 5/16"	8 1/4"	27 3/4" No Leg	15 5/6"	21 5/16"	13 1/4"	17 1/2"	3/4"	11"	17 1/4"	11 5/8"	11 1/4"	-	78
BI-12	33 3/16"	30 3/16"	9 15/16"	27 7/16"	13 1/16"	9 7/8"	33 5/16"	20 3/16"	29 1/8"	16 3/4"	20 9/16"	1"	12 7/16"	21 3/16"	11 1/2"	14 3/4"	13 1/16"	112
BI-13	34 1/2"	30 15/16"	10 3/4"	24 1/2"	14 3/8"	10 3/4"	34 1/4"	20 3/16"	29 1/8"	16 3/4"	22 7/16"	1"	14 3/8"	21 1/4"	11 1/2"	14 3/4"	14"	134
BI-15	35 15/16"	31 15/16"	11 3/4"	27 1/4"	15 13/16"	12 3/4"	36 1/4"	20 3/16"	29 1/8"	16 3/4"	24 7/8"	1"	15 7/8"	21 3/16"	11 1/2"	14 3/4"	16"	140
BI-16	39 7/16"	34 11/16"	12 11/16"	29 15/16"	17 1/2"	13 1/8"	36 5/8"	22"	30 15/16"	16 3/4"	26 15/16"	1 3/16"	17 3/8"	21 1/4"	11 1/2"	14 3/4"	16 1/2"	162
BI-18	41 5/16"	35 7/8"	13 13/16"	33 3/16"	19 3/8"	14 1/2"	38 1/4"	22"	30 15/16"	16 3/4"	29 9/16"	1 3/16"	19 3/8"	21 1/2"	11 1/2"	14 3/4"	17 7/8"	172
BI-20	49 3/16"	42 15/16"	14 15/16"	36 7/16"	21 3/16"	15 3/4"	46 3/8"	28"	40 15/16"	25 1/8"	32 3/16"	1 3/16"	21 1/4"	27 5/8"	14 9/16"	22 3/4"	19 3/4"	289
BI-22	51 9/16"	44 3/8"	16 3/8"	40 7/16"	23 9/16"	17 3/4"	48 7/16"	28"	40 15/16"	25 1/8"	35 9/16"	1 3/16"	23 5/8"	27 5/8"	14 9/16"	22 3/4"	21 13/16"	322
BI-24	58 3/16"	49 15/16"	17 15/16"	44 11/16"	26 1/8"	19 3/8"	51 5/16"	32 1/8"	46 11/16"	28 15/16"	39 1/8"	1 7/16"	26"	28 15/16"	18 5/16"	26 3/8"	23 3/8"	385
BI-27	60 11/16"	51 1/2"	19 1/2"	49"	28 11/16"	21 1/4"	53 1/8"	32 1/8"	46 11/16"	28 15/16"	42 13/16"	1 7/16"	28 5/8"	28 7/8"	18 5/16"	26 3/8"	25 1/4"	411
BI-30	65 15/16"	68 3/16"	24 7/8"	54 1/2"	31 7/8"	23 5/8"	58 5/8"	43 5/16"	65 5/16"	44 5/16"	50 15/16"	1 11/16"	31 3/4"	32"	17"	40"	29"	517
BI-33	68 3/16"	68 5/8"	25 3/8"	58 15/16"	34 7/8"	25 15/16"	60 15/16"	43 5/16"	65 5/16"	44 5/16"	53 7/8"	1 11/16"	35"	32"	17"	40"	31 5/16"	607
BI-36	70 7/8"	69"	25 1/2"	66 3/16"	38 9/16"	28 11/16"	63 11/16"	43 5/16"	65 5/16"	44 5/16"	56 15/16"	1 15/16"	38 3/4"	32"	17"	40"	34 1/16"	747

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1" SP				2" SP				3" SP				4" SP				5" SP				Min HP	Max HP
	CFM	BHP	FEI	FEPA _{act} (kW)	CFM	BHP	FEI	FEPA _{act} (kW)	CFM	BHP	FEI	FEPA _{act} (kW)	CFM	BHP	FEI	FEPA _{act} (kW)	CFM	BHP	FEI	FEPA _{act} (kW)		
BI-10	2300	1.92	0.71	1.78	2100	2.00	0.87	1.85	1800	1.88	1.01	1.74	1600	1.96	1.07	1.81	1300	1.95	1.07	1.80	1/2	2
BI-12*	3000	2.27	0.73	2.08	2900	2.69	0.86	2.43	2600	2.66	1.00	2.41	2400	2.79	1.09	2.52	1900	2.56	1.13	2.32	-	3
BI-13	3900	3.00	0.75	2.70	3600	3.12	0.92	2.80	3300	3.26	1.04	2.92	2900	3.20	1.13	2.86	2400	3.01	1.19	2.70	1/2	5
BI-15*	4800	3.68	0.71	3.27	4400	3.77	0.89	3.34	4000	3.90	1.02	3.45	3600	3.98	1.11	3.52	3000	3.77	1.16	3.34	-	5
BI-16	5700	4.26	0.74	3.76	5300	4.48	0.92	3.94	4900	4.70	1.04	4.12	4300	4.66	1.12	4.09	3500	4.38	1.16	3.86	3/4	7 1/2
BI-18	6200	3.88	0.82	3.44	5400	4.11	0.95	3.63	4700	4.18	1.06	3.69	3500	3.71	1.11	3.29	-	-	-	-	3/4	7 1/2
BI-20	8400	5.79	0.80	5.03	7900	5.96	1.02	5.18	7200	6.20	1.14	5.38	6400	6.29	1.22	5.45	5300	6.08	1.24	5.28	1	7 1/2
BI-22*	10000	6.51	0.81	5.63	9100	7.56	0.89	6.51	8200	7.80	1.01	6.70	6900	7.58	1.07	6.52	-	-	-	-	-	10
BI-24	11200	6.48	0.86	5.61	10100	6.85	1.05	5.92	8800	6.99	1.17	6.03	6700	6.43	1.19	5.57	-	-	-	-	1 1/2	15
BI-27	15000	10.03	0.80	8.55	14100	11.01	0.96	9.36	12800	11.39	1.08	9.67	11200	11.39	1.16	9.67	8300	9.97	1.15	8.50	1 1/2	15
BI-30-AW	18700	13.32	0.75	11.30	17400	14.07	0.93	11.90	16100	14.82	1.05	12.50	14200	14.79	1.13	12.50	11900	14.32	1.16	12.10	2	15
BI-33-AW	22600	16.07	0.75	13.50	21000	16.98	0.93	14.30	19400	17.86	1.05	15.00	17100	17.82	1.13	15.00	14300	17.22	1.15	14.50	-	20
BI-36-AW	26886	18.34	0.77	15.40	24964	19.58	0.94	16.40	22900	20.54	1.06	17.20	19836	20.20	1.14	16.90	15695	18.93	1.14	15.90	3	25

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).

*Special Order



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE



Canarm certifies that the BI Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Programme. The AMCA certified ratings seal applies to air performance only. The BI Series shown herein are not approved by AMCA for FEI ratings. May 2026