


Direct Drive Tube Axial Duct Fans

DDA SERIES

Minimum maintenance.
Maximum efficiency.

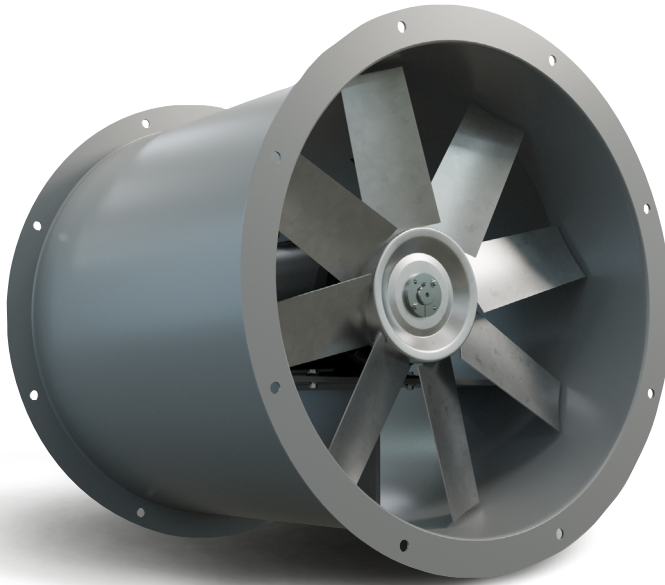



FEATURES

DDA - FOR CLEAN, DRY AIR WITH A
MAXIMUM TEMPERATURE OF 100°F (40°C)

- Cast aluminum blades are standard.
- TEFC motors are standard.

DIMENSIONS

FAN SIZE	A	B	C	D	WEIGHT (lbs) without motor
12"	15 1/8"	14"	12"	17"	37
14"	17 3/8"	16"	14 3/8"	17"	TBA
15"	17 7/8"	17"	15 3/8"	17"	42
16"	19 3/8"	18"	16 3/8"	21"	TBA
18"	20 7/8"	20"	18 3/8"	21"	55
20"	23 3/8"	22"	20 3/8"	21"	TBA
24"	27 3/8"	25 7/8"	24 3/8"	21"	102
30"	33 3/8"	32 3/8"	30 3/8"	21"	138
34"	37 3/8"	36 3/8"	34 3/8"	27"	169
36"	39 3/8"	38 3/8"	36 3/8"	27"	181
42"	45 3/8"	44 3/8"	42 3/8"	32"	225
48"	51 3/8"	50 3/8"	48 3/8"	32"	308

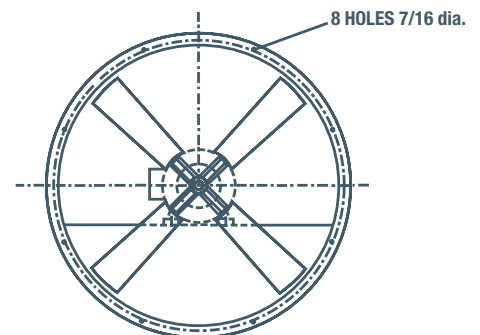

DDA SERIES

Direct Drive Tube Axial Duct Fans

PERFORMANCE SPECIFICATIONS

	MODEL #		RPM	H.P.	dBA @ 5 ft.	CFM @ STATIC PRESSURE					
	SINGLE PHASE	THREE PHASE				0"	1/4"	1/2"	3/4"	1"	1 1/4"
12"	DDA12T10033B	DDA12T30033B*	1750	1/3	49	1450	1230	313	-	-	-
	DDA12T10200A	DDA12T30200A*	3450	2.0	72	2860	2740	2640	2530	2410	2140
14"	DDA14T10033C	DDA14T30033C*	1140	1/3	53	1450	443	-	-	-	-
	DDA14T10033B	DDA14T30033B*	1750	1/3	60	2220	1920	1350	512	185	-
15"	DDA15T10033B	DDA15T30033B*	1750	1/3	65	2630	2320	1840	-	-	-
	DDA16T10033C	DDA16T30033C*	1140	1/3	56	2150	1640	340	-	-	-
16"	DDA16T10050B	DDA16T30050B*	1750	1/2	66	3300	3040	2690	1750	825	370
	DDA18T10033C	DDA18T30033C*	1140	1/3	59	2990	2450	845	-	-	-
18"	DDA18T10075B	DDA18T30075B*	1750	3/4	71	4590	4280	3910	3260	1750	-
	DDA20T10033C	DDA20T30033C*	1140	1/3	60	4530	3180	739	-	-	-
20"	DDA20T10100B	DDA20T30100B*	1750	1.0	76	6950	6155	5300	3225	1860	853
	DDA20T10200B	DDA20T30200B*	1750	2.0	78	7893	7486	6506	5336	4060	2513
24"	DDA24T10050C	DDA24T30050C*	1140	1/2	52	4990	4180	2920	1210	-	-
	DDA24T10100C	DDA24T30100C*	1140	1.0	57	6520	5630	4380	1920	813	-
24"	DDA24T10150C	DDA24T30150C*	1140	1.5	61	8710	7630	6020	2380	720	-
	DDA24T10150B	DDA24T30150B*	1750	1.5	65	7660	7160	6620	5980	5170	4020
24"	DDA24T10200B	DDA24T30200B*	1750	2.0	66	9210	8660	8090	7470	6660	5540
	DDA24T10300B	DDA24T30300B*	1750	3.0	71	11500	10900	10200	9490	8680	7540
30"	DDA30T10100C	DDA30T30100C*	1140	1.0	57	8680	7480	6000	3630	1550	-
	DDA30T10150C	DDA30T30150C*	1140	1.5	61	11800	10600	8950	6070	3070	-
30"	-	DDA30T30200C*	1140	2.0	62	12780	11490	9850	7320	3620	-
	-	DDA30T30300C*	1140	3.0	68	16400	14700	12700	6840	4120	-
30"	DDA30T10300B	DDA30T30300B*	1750	3.0	69	13300	12550	11700	11000	9980	8830
	DDA30T10500B	DDA30T30500B*	1750	5.0	73	18200	17350	16550	15200	14600	13880
30"	-	DDA30T30750B*	1750	7.5	77	22600	21980	20650	19030	18300	17550
	-	DDA34T30200C*	1140	2.0	64	15300	13800	12000	10490	6070	3440
34"	-	DDA34T30300C*	1140	3.0	67	19300	17700	15600	12900	8620	6110
	-	DDA34T30500C*	1140	5.0	70	22500	20550	18300	13100	10200	6860
34"	DDA34T10500B	DDA34T30500B*	1750	5.0	76	18700	17820	16800	15700	14600	13660
	DDA34T10750B	DDA34T30750B*	1750	7.5	76	23500	22600	21500	20400	19300	18160
34"	-	DDA34T31000B*	1750	10.0	78	27800	26750	25500	24250	23300	22150
	-	DDA34T31500B*	1750	15.0	81	31300	30300	29100	28250	26600	25130
36"	-	DDA36T30200C*	1140	2.0	66	14000	12400	10600	8390	5530	-
	-	DDA36T30300C*	1140	3.0	67	19400	17550	15600	13100	8980	6450
36"	-	DDA36T30500C*	1140	5.0	68	23600	22050	19700	16850	11700	9220
	DDA36T10500B	DDA36T30500B*	1750	5.0	70	16200	15200	14200	12800	12200	11050
36"	-	DDA36T30750C*	1140	7.5	72	26100	23800	21600	18350	12900	9730
	DDA36T10750B	DDA36T30750B*	1750	7.5	78	21500	20400	19400	18350	17100	15850
36"	-	DDA36T31000B*	1750	10.0	79	29700	28550	27300	26150	24900	23700
	-	DDA36T31500B*	1750	15.0	81	34320	32960	31970	30680	29280	28030
42"	-	DDA42T30200D*	860	2.0	61	19200	16300	12400	6720	-	-
	-	DDA42T30300D*	860	3.0	63	23210	20230	16280	8980	3940	-
42"	-	DDA42T30500D*	860	5.0	66	28900	25600	20800	11100	6290	-
	-	DDA42T30500C*	1140	5.0	68	25500	23550	21100	18300	14200	10100
42"	-	DDA42T30750C*	1140	7.5	70	30690	28750	26190	23350	19410	12780
	-	DDA42T31000C*	1140	10.0	73	38300	35700	33100	29450	23000	15400
42"	-	DDA42T31000B*	1750	10.0	76	26700	25200	23750	22380	21100	19570
	-	DDA42T31500B*	1750	15.0	80	39100	38080	36700	34640	33500	32040
42"	-	DDA42T32000B*	1750	20.0	82	43300	42280	40860	39170	37600	36140
	-	DDA48T30500D*	860	5.0	66	29820	26940	23790	12790	12790	6740
48"	-	DDA48T30750D*	860	7.5	68	35700	32450	28600	16800	16800	8270
	-	DDA48T31000C*	1140	10.0	74	37200	35300	33200	30800	27700	24000
48"	-	DDA48T31500C*	1140	15.0	76	47300	45050	42300	36200	36200	33490
	-	DDA48T32000C*	1140	20.0	79	53900	51450	48400	42300	42300	37120

BLADE DIAMETER

For three phase motors, substitute "*" with "M" for 230/460 volt (If 208V required please specify) or "P" for 575 volt. dBA ratings shown are measured at 0" static pressure and should be used as a guideline only