

Forward Curved Blowers

D SERIES

Ideal for light duty exhaust applications and low static environments.

Used for general Ventilation of small areas where duct systems are required.



FEATURES


- Wheels are forward curved steel, dynamically balanced and designed for efficient operation.
- Welded 16 gauge steel housings and motor bases.
- TEFC motors are standard in Single Phase 120 or 230V, 3Phase 230/460V or 575V - 1140 or 1750 RPM
- Standard clockwise rotation, bottom horizontal discharge (can be rotated at 45° increments)
- Housing has a durable powdercoat paint

OPTIONAL ACCESSORIES

- Weather cover

D SERIES

Forward Curved Blowers

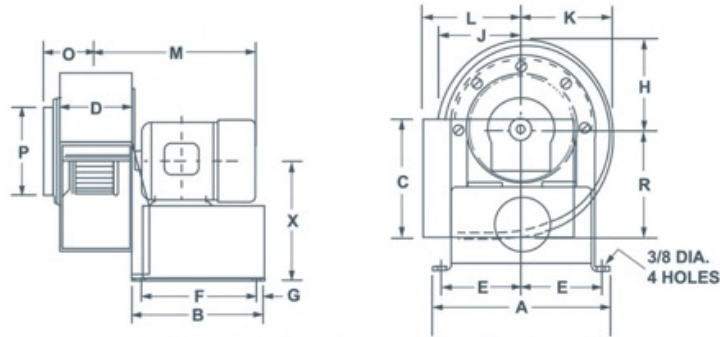

DIMENSIONS

BLOWER	WHEEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	O	P	R	X	WEIGHT (lbs) without motor
D6Tx33B	6 1/4" X 3"	5/8"	9 3/8"	8"	7 3/8"	4 1/4"	4 1/4"	7"	1/2"	5"	4"	6"	5"	11 5/8"	3 1/8"	6"	7 1/8"	9"	13
D8Tx33C	7 3/4" X 3 7/8"	5/8"	11"	8"	8 1/4"	5 3/8"	5"	7"	1/2"	6"	4 5/8"	6 3/4"	6 7/8"	12 1/2"	3 3/4"	8"	8"	9"	18
D8Tx50B	7 3/4" X 3 7/8"	5/8"	11"	8"	8 1/4"	5 3/8"	5"	7"	1/2"	6"	4 5/8"	6 3/4"	6 7/8"	12 1/2"	3 3/4"	8"	8"	9"	18
D9Tx33C	9" X 4 1/2"	5/8"	12 1/8"	8"	10 3/4"	6 1/2"	5 5/8"	7"	1/2"	6 3/4"	5 5/8"	7 3/4"	7 1/8"	13"	4 3/8"	9"	9 1/4"	9 7/8"	25
D9Tx100B	9" X 4 1/2"	5/8"	12 1/8"	8"	10 3/4"	6 1/2"	5 5/8"	7"	1/2"	6 3/4"	5 5/8"	7 3/4"	7 1/8"	14 1/4"	4 3/8"	9"	9 1/4"	9 7/8"	25
D11Tx	10 5/8" X 5 1/4"	5/8"	14 3/4"	11 1/2"	11 3/4"	8"	6 7/8"	10"	3/4"	8"	6 3/4"	9 1/8"	8 1/8"	15 1/2"	5"	10"	10 3/4"	11 1/4"	36
D11GTx	10 5/8" X 4"	5/8"	14 3/4"	11 1/2"	11 3/4"	5 7/8"	6 7/8"	10"	3/4"	8"	6 3/4"	9 1/8"	8 1/8"	14 5/8"	4"	10"	10 3/4"	11 1/4"	36

Note: the lower case "x" in the Blower model number indicates that both the single phase and 3 phase models are referenced in the listed dimensions.

PERFORMANCE SPECIFICATIONS

MODEL			CFM @ STATIC PRESSURE																				dBA				
SINGLE PHASE	H.P.	RPM	0"		1/4"		1/2"		3/4"		1"		1 1/2"		2"		@										
			CFM	BHP	CFM	BHP	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	5 FT				
D6T10033B	1/3	1750	595	0.19	515	0.15	420	0.11			300	0.08											53				
D8T10033C	1/3	1140	740	0.18	608	0.13	430	0.09															55				
D8T10050B	1/2	1750	1150	0.5	1050	0.5	960	0.49			865	0.45			750	0.37							57				
D9T10033C	1/3	1140	1180	0.33	1125	0.33	1035	0.32			855	0.24											56				
D9T10100B	1	1750	WILL OVERLOAD MOTOR				1720	0.92	0.69	0.82	1675	0.86	0.85	0.77	1620	0.78	1.03	0.71	1445	0.55	1.62	0.52	1100	0.3	2.64	0.3	58
D11T10075C	3/4	1140	2060	0.74	1870	0.65	1710	0.52			1500	0.4			1290	0.25							61				
D11GT10150B	1 1/2	1750	WILL OVERLOAD MOTOR																1840	1.47	0.82	1.28	1600	1.28	0.99	1.13	63
MODEL			CFM @ STATIC PRESSURE																				dBA				
THREE PHASE	H.P.	RPM	0"		1/4"		1/2"		3/4"		1"		1 1/2"		2"		@										
			CFM	BHP	CFM	BHP	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	CFM	BHP	FEI	FEP(Kw)	5 FT				
D6T30033B*	1/3	1750	595	0.19	515	0.15	420	0.11			300	0.08											53				
D8T30033C*	1/3	1140	740	0.18	608	0.13	430	0.09															55				
D8T30050B*	1/2	1750	1150	0.5	1050	0.5	960	0.49			865	0.45			750	0.37							57				
D9T30033C*	1/3	1140	1180	0.33	1125	0.33	1035	0.32			855	0.24											56				
D9T30100B*	1	1750	WILL OVERLOAD MOTOR				1720	0.92			1675	0.86	0.87	0.75	1620	0.78	1.07	0.68	1445	0.55	1.67	0.5	1100	0.3	2.66	0.3	58
D11T30075C*	3/4	1140	2060	0.74	1870	0.65	1710	0.52			1500	0.4			1290	0.25							61				
D11GT30150B*	1 1/2	1750	WILL OVERLOAD MOTOR																1840	1.47	0.83	1.27	1600	1.28	1	1.11	63

* For three phase motors, substitute the "*" with either M for 230/460 Volt or P for 575 Volt.

Fan should not be run at static pressure less than shown in above table, motor overload will result. dBA ratings shown are measured at 0" static pressure, and should be used as a guideline only.