



Forward Curved Inline Duct Blowers

WITH EC MOTOR

FEATURING EC MOTORS
- UP TO 70% EFFICIENCY



ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS

200DD-EC, 9200DD-EC

FEATURES

- High efficiency direct drive motor for energy efficient, low maintenance applications.
- Forward curved blowers operate at low RPM for low noise levels.
- Attractive grey baked on powder coat finish.
- EC Motor offers true variable speed operation and up to 70% energy savings over PSC motors.

** Minimum motor speed 425 RPM (EC Models)*

*EC motors can be controlled using the built in potentiometer on motor
or by using a 0 to 10 V controller, or by a remote potentiometer.*

*REVIEW FAN CURVES BEFORE ADJUSTING RPM TO ENSURE LOAD
DOES NOT EXCEED MOTOR HP.*

ACCESSORIES

- Filter sections
- Intake Hoods
- Vibration Isolators
- Back Draft Dampers

200DD-EC


Indoor Applications, Insulated or
Non-Insulated.

9200DD-EC

Heavy duty, Insulated Indoor or
Outdoor Applications

200DD-EC, 9200DD-EC

Forward Curved Inline Duct Blowers WITH EC MOTOR

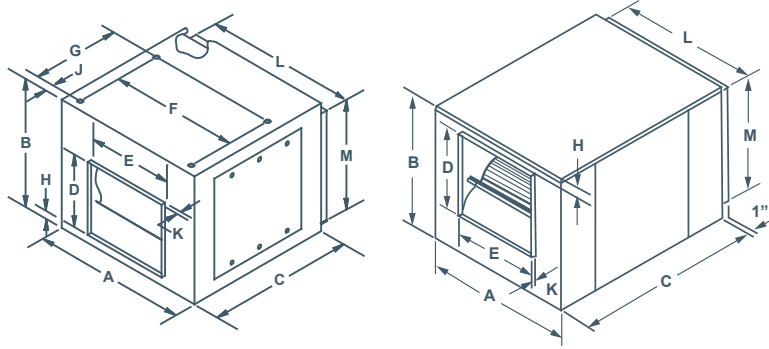

DIMENSIONS

MODEL	A	B	C	OUTLET		F	G	H	J	K	INLET		SHAFT DIAMETER	WEIGHT (lbs) without motor
				D	E						L	M		
209DD	21"	18"	23"	10 1/4"	11 13/16"	17 1/2"	11 3/4"	1 1/4"	1 3/4"	7/8"	19"	16"	3/4"	55
210DD	22 1/4"	20"	24 3/4"	11 3/8"	13 1/8"	18 3/4"	13 3/8"	1 1/4"	1 3/4"	7/8"	20 1/4"	18"	3/4"	65
212DD	27"	23"	27 1/2"	13 7/16"	15 5/8"	23 1/2"	16 1/8"	1 1/4"	1 3/4"	7/8"	25"	21"	3/4"	82
9209DD	21"	18"	23"	11 1/4"	12 3/4"	N/A	N/A	1"	N/A	1 1/8"	19"	16"	3/4"	61
9210DD	22 1/4"	20"	24 3/4"	12 3/8"	14 1/8"	N/A	N/A	1"	N/A	1 1/8"	20 1/4"	18"	3/4"	70
9212DD	30 1/8"	24 3/4"	34"	14 1/2"	16 5/8"	N/A	N/A	2 1/8"	N/A	1 1/8"	25 1/8"	21 1/8"	1"	143

PERFORMANCE SPECIFICATIONS

MODEL	MOTOR			TYPICAL MAXIMUM CFM @ SP																				
	HP	Variable Speed	Max RPM	Speed	1/4"				1/2"				3/4"				1"				1 1/4"			
					CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
209DD050EC	1/2	Y*	1200	High	1800	-	-	-	1550	-	-	-	1200	-	-	-	950	-	-	-	-	-	-	-
				Low	700	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	-	-	-	-
209DD100EC	1	Y*	1200	High	2300	0.98	0.79	0.87	2100	0.92	0.89	0.82	1900	0.95	0.89	0.85	1500	0.80	0.94	0.72	-	-	-	-
				Low	700	0.10	1.60	0.13	600	0.13	1.53	0.15	600	0.19	1.38	0.21	600	0.26	1.25	0.27	-	-	-	-
210DD050EC	1/2	Y*	1100	High	2000	-	-	-	1850	-	-	-	1650	-	-	-	1500	-	-	-	950	-	-	-
				Low	800	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
210DD100EC	1	Y*	1100	High	2639	1.00	0.82	0.89	2500	0.99	0.93	0.88	2325	0.93	1.07	0.83	1800	0.65	1.30	0.60	825	0.34	1.53	0.34
				Low	800	0.08	1.99	0.11	600	0.10	1.83	0.13	600	0.16	1.56	0.18	600	0.21	1.48	0.22	600	0.28	1.33	0.28
212DD050EC	1/2	Y*	1000	High	2600	-	-	-	2100	-	-	-	1800	-	-	-	1550	-	-	-	1200	-	-	-
				Low	900	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
212DD100EC	1	Y*	1000	High	3400	0.98	0.98	0.87	3100	0.95	1.09	0.85	2750	0.89	1.20	0.80	2450	0.88	1.25	0.79	1200	0.45	1.41	0.43
				Low	900	0.08	2.10	0.11	600	0.10	1.81	0.13	600	0.16	1.55	0.18	600	0.21	1.47	0.22	600	0.28	1.32	0.28

MODEL	MOTOR			TYPICAL MAXIMUM CFM @ SP																				
	HP	Variable Speed	Max RPM	Speed	1/4"				1/2"				3/4"				1"				1 1/4"			
					CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
9209DD050EC	1/2	Y*	1200	High	1800	-	-	-	1550	-	-	-	1200	-	-	-	950	-	-	-	-	-	-	-
				Low	700	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	-	-	-	-
9209DD100EC	1	Y*	1200	High	2300	0.98	0.79	0.87	2100	0.92	0.89	0.82	1900	0.95	0.89	0.85	1500	0.80	0.94	0.72	-	-	-	-
				Low	700	0.10	1.60	0.13	600	0.13	1.53	0.15	600	0.19	1.38	0.21	600	0.26	1.25	0.27	-	-	-	-
9210DD050EC	1/2	Y*	1100	High	2000	-	-	-	1850	-	-	-	1650	-	-	-	1500	-	-	-	950	-	-	-
				Low	800	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
9210DD100EC	1	Y*	1100	High	2639	1.00	0.82	0.89	2500	0.99	0.93	0.88	2325	0.93	1.07	0.83	1800	0.65	1.30	0.60	825	0.34	1.53	0.34
				Low	800	0.08	1.99	0.11	600	0.10	1.83	0.13	600	0.16	1.56	0.18	600	0.21	1.48	0.22	600	0.28	1.33	0.28
9212DD050EC	1/2	Y*	1000	High	2600	-	-	-	2100	-	-	-	1800	-	-	-	1550	-	-	-	1200	-	-	-
				Low	900	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
9212DD100EC	1	Y*	1000	High	3400	0.98	0.98	0.87	3100	0.95	1.09	0.85	2750	0.89	1.20	0.80	2450	0.88	1.25	0.79	1200	0.45	1.41	0.43
				Low	900	0.08	2.10	0.11	600	0.10	1.81	0.13	600	0.16	1.55	0.18	600	0.21	1.47	0.22	600	0.28	1.32	0.28