

FC Exhauster Belt Drive Utility Blowers


400 SERIES



AVAILABLE WITH MOTORS & DRIVES Factory installed.
Consult Delair Software for details

FEATURES

- Universal frame allows for choice of discharge position.
- Multiple choice for motor mounting location with each discharge position.
- Motor mounting hardware supplied with models 407 to 418.
- Optional platform for models 420 to 425.
- Keywayed shafts
- Ball bearings suitable for -65° to + 250° F.
- Spider bearing brackets for models 407 - 418. Pillow block bearings with T bar support for models 420, 422 & 425.
- Optional back draft dampers, inlet & outlet screens and belt guards.
- Shafts 420, 422 & 425 models are keywayed for wheels and pulleys (407 to 418 models for pulleys only).



Optional 1 to 15 HP Motor Platform for Models 420, 422 & 425



ACCESSORIES


- Inlet & Outlet Screens
- Corrosion Resistant Finishes
 - Vibration Isolation
 - Belt Guard

For more information on available accessories, see Roof Mount Ventilation section.

400 SERIES

FC Exhauster Belt Drive Utility Blowers

DIMENSIONS

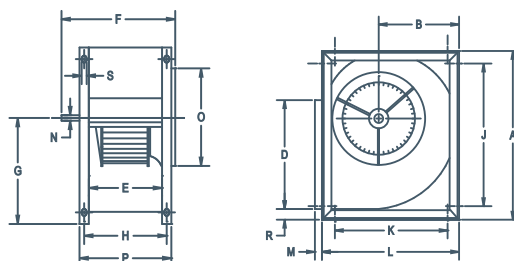

MODEL	A	B	D	E	F	G	H	J	K	L	M	N	O	P	R	S	WHEEL DIAMETER	WHEEL WIDTH	WEIGHT (lbs) without motor
407	14 1/4"	6 1/2"	8 3/8"	6 7/8"	11 5/8"	8 5/8"	8"	11 1/16"	8 7/8"	11 3/4"	3/4"	3/4"	9"	9"	1 1/2"	7/16"	8 1/26"	4 15/16"	16
409	17 1/4"	7 15/16"	10 1/4"	9 3/16"	13 15/16"	10 1/8"	10 5/16"	14 5/8"	11 3/4"	14 1/2"	3/4"	3/4"	10"	11 5/16"	1 1/2"	7/16"	9 13/16"	7 3/16"	23
410	19 1/8"	9"	11 3/8"	9 3/16"	13 15/16"	11 1/4"	10 5/16"	16 1/4"	13 1/2"	16 1/4"	3/4"	3/4"	12"	11 5/16"	1 1/2"	7/16"	11 1/8"	7 3/16"	26
412	22 1/4"	10 9/16"	13 1/2"	9 3/16"	13 15/16"	13"	10 5/16"	19 5/8"	16 1/4"	19"	3/4"	3/4"	14"	11 5/16"	1 1/2"	7/16"	12 7/8"	7 3/16"	30
415	29 3/4"	14 3/4"	17"	12 1/2"	17 3/8"	18 1/8"	13 3/4"	27 1/4"	22 5/8"	25 1/4"	3/4"	1"	17"	14 3/4"	1 1/2"	7/16"	15 1/2"	9 9/16"	56
418	30 3/4"	14 15/16"	18 7/8"	14"	20 3/8"	17 3/4"	15 5/8"	28 1/2"	24"	26 1/2"	3/4"	1"	18"	17 1/4"	1 1/2"	7/16"	18 1/2"	10 13/16"	87
420	38"	18 5/16"	24 3/4"	15 3/4"	24 1/4"	22 9/16"	17 1/4"	32 7/16"	25 7/16"	31 1/4"	1 1/2"	1 3/16"	21"	19 3/4"	2"	5/8"	20 7/16"	10 1/4"	189
422	41 1/2"	20 1/16"	27 1/4"	17 1/8"	25 5/8"	24 5/8"	18 5/8"	35 31/32"	28 15/32"	34 1/4"	1 1/2"	1 3/16"	22 1/2"	21 1/8"	2"	5/8"	22 1/8"	11 1/4"	214
425	46 3/4"	22 5/8"	31 1/4"	19 5/8"	28 1/2"	27 3/4"	21 1/8"	41 7/32"	32 17/32"	38 3/8"	1 1/2"	1 3/16"	26 3/4"	23 5/8"	2"	5/8"	25 1/4"	13"	252

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Max HP
	CFM	BHP	FEI	FEPA ^{ct} (kW)	CFM	BHP	FEI	FEPA ^{ct} (kW)	CFM	BHP	FEI	FEPA ^{ct} (kW)	CFM	BHP	FEI	FEPA ^{ct} (kW)	CFM	BHP	FEI	FEPA ^{ct} (kW)	
407	1000	0.92	0.47	0.91	900	0.92	0.56	0.91	800	0.91	0.63	0.90	700	0.97	0.64	0.95	500	0.98	0.59	0.96	1
409	2100	1.78	0.52	1.66	2000	1.82	0.62	1.69	1900	1.82	0.71	1.69	1800	1.79	1.69	1.70	1700	1.84	0.85	1.69	2
410	2600	1.99	0.61	1.84	2400	1.87	0.72	1.74	2300	1.95	0.80	1.80	2200	2.00	0.88	1.85	2000	1.83	0.99	1.70	2
412	3000	1.89	0.70	1.75	2800	1.86	0.82	1.73	2700	1.99	0.90	1.84	2500	1.98	0.97	1.83	2300	1.92	1.06	1.78	2
415	5300	3.00	0.76	2.70	4800	2.91	0.86	2.62	4500	2.95	0.95	2.65	4200	3.00	1.03	2.70	3600	3.00	1.00	2.70	3
418	6700	4.92	0.60	4.31	6300	4.97	0.68	4.35	5900	4.93	0.77	4.32	5500	4.85	0.84	4.25	5200	4.91	0.91	4.30	5
420	9300	7.38	0.52	6.36	8900	7.47	0.62	6.43	8500	7.43	0.72	6.40	8100	7.42	0.80	6.39	7700	7.50	0.87	6.46	7 1/2
422	10300	7.32	0.54	6.31	9800	7.50	0.64	6.46	9200	7.41	0.74	6.38	8600	7.34	0.82	6.32	8000	7.41	0.88	6.38	7 1/2
425	14300	9.95	0.87	8.48	13500	9.99	0.68	8.52	12500	9.86	0.76	8.41	11900	10.00	0.84	8.53	11400	9.96	0.94	8.49	10

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE