



Forward Curved Roof Exhauster Belt Drive Utility Blower

600 SERIES

FEATURES

- Standard, vented motor and drive compartment cover with handles for safety and weather protection.
- Sliding motor base for belt tension adjustment.
- Standard top horizontal discharge position can be easily rotated to any of 8 positions.
- Shafts for 620, 622 & 625 models are keywayed for wheels and pulleys (610 to 618 models for pulleys only).
- Outlet flanges on models 620, 622 & 625.
- Available in CW or CCW rotation.
- Keywayed shaft.
- Heavy duty pillow block ball bearings.


ACCESSORIES

- Back Draft Dampers
- Inlet & Outlet Screens
- Corrosion Resistant Finishes
- Bolted Clean Out Door
- Heat Slinger
- 2" Drain Fitting
- Shaft Seal (vinyl or polyethylene)
- Vibration Isolation



AVAILABLE WITH MOTORS & DRIVES FACTORY INSTALLED

Consult FAN Software for details

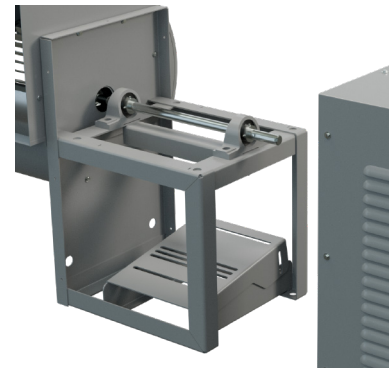

Motor and drive compartment with cover removed showing 3 side motor access and sloping motor base for belt tensioning.



600 SERIES

Forward Curved Roof Exhauster, Belt Drive Utility Blower


PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Min HP	Max HP
	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)		
610	2600	1.99	0.61	1.84	2400	1.87	0.72	1.74	2300	1.95	0.80	1.80	2200	2	0.88	1.85	2000	1.83	0.99	1.70	1/6	2
612	3000	1.89	0.70	1.75	2800	1.86	0.82	1.73	2700	1.99	0.90	1.84	2500	1.98	0.97	1.83	2300	1.92	1.06	1.78	1/3	2
615	6189	4.5	0.69	3.98	5786	4.49	0.76	3.97	5457	4.5	0.83	3.98	5172	4.5	0.91	3.98	4903	4.52	0.97	4.00	1/3	3
618	6307	4.49	0.58	3.97	5965	4.51	0.69	3.99	5487	4.5	0.75	3.98	5036	4.5	0.81	3.98	4844	2.5	0.90	3.97	1/2	5
620	10300	9.78	0.48	8.34	9900	9.8	0.57	8.36	9600	9.98	0.64	8.51	9200	9.82	0.73	8.38	8900	10	0.79	8.53	1/2	7 1/2
622	11500	9.83	0.49	8.38	11000	9.99	0.58	8.52	10400	9.79	0.67	8.35	10000	10	0.74	8.53	9400	9.83	0.81	8.38	1/2	7 1/2
625	14300	9.95	0.57	8.48	13500	9.99	0.68	8.52	12500	9.86	0.76	8.41	11900	10	0.84	8.53	11400	9.96	0.94	8.49	1	10

CFM values listed are summarized for convenience. For full performance data refer to our FAN program.

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).

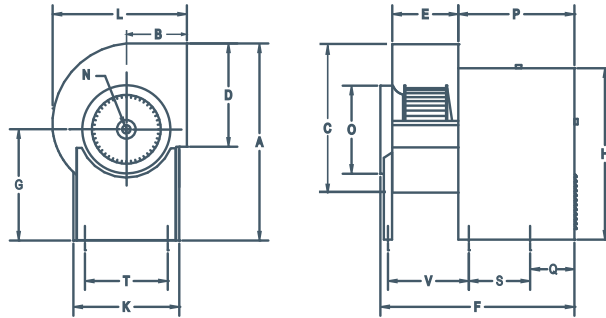

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	K	L	N	O	P	Q	S	T	V	WHEEL DIAMETER	WHEEL WIDTH	WEIGHT (lbs) without motor
610	24 13/16"	8"	17 7/16"	11 3/8"	9 3/16"	28 9/16"	15 1/16"	21 5/16"	13 3/16"	16 3/4"	3/4"	12"	17 1/4"	3 3/4"	11 3/4"	11 7/16"	--	11 1/8"	7 3/16"	57
612	26 9/16"	9 1/8"	20 1/4"	13 7/16"	9 3/16"	28 9/16"	15 1/16"	21 5/16"	13 3/16"	19 1/2"	3/4"	14"	17 1/4"	3 3/4"	11 3/4"	11 7/16"	--	12 7/8"	7 3/16"	60
615	36 3/4"	11 1/4"	28 1/16"	17"	12 1/2"	35 7/8"	20 1/16"	29 1/8"	16 9/16"	25 15/16"	1"	17"	21 1/8"	--	11 1/2"	14 11/16"	15 5/8"	15 1/2"	9 9/16"	124
618	36 5/16"	12 3/8"	28 7/8"	18 7/8"	14"	37 3/8"	20 1/16"	29 1/8"	16 9/16"	27"	1"	18"	21 1/8"	--	11 1/2"	14 11/16"	17 1/8"	18 1/2"	10 13/16"	144
620	48 9/16"	14 7/16"	35 3/4"	24 3/4"	15 3/4"	46 7/16"	28"	40 7/8"	25 1/4"	32 7/16"	1 3/16"	21"	27 11/16"	--	14 5/8"	22 1/2"	18 7/8"	20 7/16"	10 1/4"	278
622	50 9/16"	15 11/16"	39 3/8"	27 1/4"	17 1/8"	47 13/16"	28"	40 7/8"	25 1/4"	35 1/2"	1 3/16"	22 1/2"	27 11/16"	--	14 5/8"	22 1/2"	20 1/4"	22 1/8"	11 1/4"	296
625	53 11/16"	17 1/4"	44 3/8"	31 1/4"	19 5/8"	50 5/16"	28"	40 7/8"	25 1/4"	39 5/8"	1 3/16"	26 3/4"	27 11/16"	--	14 5/8"	22 1/2"	22 3/4"	25 1/4"	13"	329



SCAN TO VIEW FEI CHARTS



SCAN TO USE FAN SOFTWARE



Intertek



Canarm certifies that the 600 Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air performance only. The 600 Series shown herein are not approved by AMCA for FEI ratings. May 2026