


# Aluminum Control Dampers

AD-AF

## FEATURES

- DEPTH BLADES CLOSED: 4" (101 mm)
- DEPTH BLADES OPEN: 6 1/8" (156 mm)
- MATERIAL: extruded 6063-T5 aluminum
- FRAME THICKNESS: 0.081" (2.06 mm)
- BLADE STYLE: OB - opposed blade standard; PB - parallel blade on request
- BLADE THICKNESS: 0.081" (2.06 mm)
- BEARINGS: moulded synthetic (Acetal)
- SEALS: co-extruded santoprene vinyl blade seal and vinyl jamb seal
- AXLES: 3/8" aluminum square bar
- FRAME STYLE: specify DM for Duct Mount or FM for Flange Mount
- MINIMUM HEIGHT: 8" (203 mm) single blade; 15" (381 mm) multiple blade
- MAXIMUM PANEL WIDTH: 60" (1524 mm)
- MAXIMUM PANEL HEIGHT: 60" (1524 mm)
- MAXIMUM SYSTEM PRESSURE: 5" w.g. for 60" blades
- LEAKAGE: does not exceed 7 CFM/ft<sup>2</sup> (341/s/m<sup>2</sup>) against 4" w.g. (1 kPa) differential static pressure at -40°F (-40°C)
- LINKAGE: concealed in frame
- STANDARD FINISH: mill
- STANDARD MOTOR INSTALLATION: side shaft direct drive, extendable up to 12"

*Non-standard dampers are non-returnable and cannot be cancelled.*

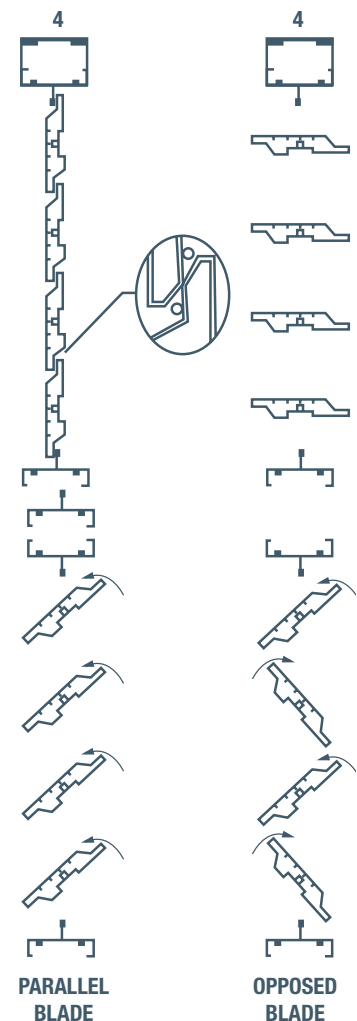

## ORDERING METHOD

DAMPER STYLES: Duct mount = AD; Flange mount = AF

**AD24.00x24.00**  
DAMPER STYLE WIDTH HEIGHT