


Insulated Aluminum Control Dampers

ADI-AF

FEATURES

- DEPTH BLADES CLOSED: 4" (101 mm)
- DEPTH BLADES OPEN: 6 1/8" (156 mm)
- MATERIAL: extruded 6063-T5 aluminum
- FRAME THICKNESS: 0.081" (2.06 mm)
- BLADE STYLE: OB - opposed blade standard; PB - parallel blade on request
- BLADE THICKNESS: 0.081" (2.06 mm)
- BEARINGS: dual bearing system, consists of Engineered thermoplastic bearings (Acetal)
- SEALS: co-extruded santoprene vinyl blade seal and vinyl jamb seal
- AXLES: 3/8" aluminum square bar
- FRAME STYLE: specify DM for Duct Mount or FM for Flange Mount
- FRAME INSULATION: polystyrene insulation
- BLADE INSULATION: 60" blades are thermally broken high density polyurethane non-CFC foam (R-2.25)
- MINIMUM HEIGHT: 8" (203 mm) single blade; 15" (381 mm) multiple blade
- MAXIMUM PANEL WIDTH: 60" (1524 mm)
- MAXIMUM PANEL HEIGHT: 60" (1524 mm)
- MAXIMUM PANEL SIZE: 20 square feet
- MAXIMUM SYSTEM PRESSURE: 4" w.g.
- LEAKAGE: does not exceed 7 CFM/ft² (341/s/m²) against 4" w.g. (1 kPa) differential static pressure at -40°F (-40°C)
- LINKAGE: concealed in frame
- STANDARD FINISH: mill
- STANDARD MOTOR INSTALLATION: side shaft direct drive, extendable up to 12"
- OPERATING TEMPERATURE RANGE: -40° to +200°F

Non-standard dampers are non-returnable and cannot be cancelled.

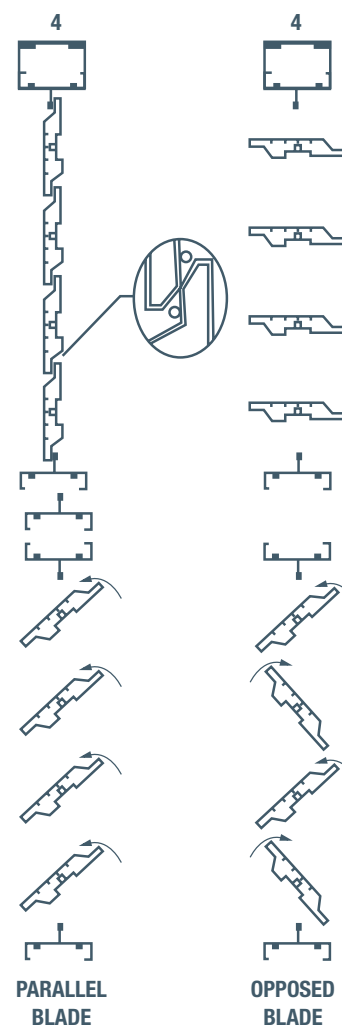

ORDERING METHOD

DAMPER STYLES: Duct mount = ID; Flange mount = IF

ID24.00x24.00
DAMPER STYLE WIDTH HEIGHT