



Downblast Direct Drive Exhausters

WITH EC MOTOR

ALX-DD-EC SERIES

Ideal for exhausting air from factories, offices, warehouses or commercial buildings. The ALX series spun aluminum exhaust fan can be used as either a roof top or wall mount exhaust fan.

**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Spun aluminum housing will not rust, chip or peel.
- Aluminum backward inclined wheel is non-overloading.
- For models with PSC Motors see ALX-DD.
- All motors are 1 Phase 120/240V operation and can be operated at 50 or 60 Hz.
- All units can be wall mounted.
- Quick release latches for easy motor access on ALX135 – ALX165.
- Comes with bird screen.
- EC motors offer true variable speed operation and up to 70% energy savings over PSC motors.
- On-board speed adjustment allows simple setup and balancing with LED display.
- Can be controlled remotely up to 50' using a remote mount potentiometer or 0-10V.




**QUICK RELEASE LATCHES
FOR EASY MOTOR ACCESS**

DISCONNECT SWITCHES

Disconnect switches are available. See Controls & Thermostats section for details.

DIMENSIONS

MODEL	DIMENSIONS (INCHES)										WEIGHT (lbs)
	A	B	C	C2	D	E	F	G Ø	Wheel Diameter	Roof Opening	
ALX105-DD-EC	18.00	25.00	19.00	21.00	2.50	1.50	3.50	0.38	10.50	15.00	33
ALX120-DD-EC	19.00	25.00	19.00	21.00	3.50	1.50	3.50	0.38	12.25	15.00	35
ALX135-DD-EC	22.25	31.25	21.00	24.75	3.13	2.00	3.75	0.44	13.50	17.00	51
ALX150-DD-EC	23.13	31.25	21.00	24.75	3.75	2.00	3.75	0.44	15.00	17.00	56
ALX165-DD-EC	27.13	36.25	24.75	28.00	5.00	2.00	4.00	0.44	16.50	20.75	100
ALX180-DD-EC	31.75	36.25	28.00	24.75	5.50	2.00	4.00	0.44	18.25	20.75	114
ALX210-DD-EC	36.25	43.75	33.13	40.00	5.25	2.50	4.00	0.44	21.00	29.00	176

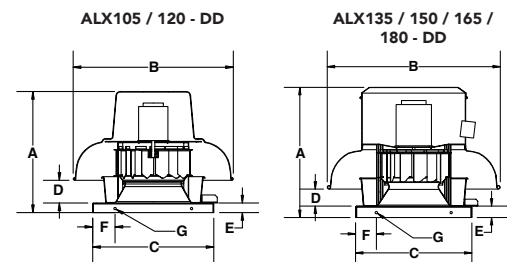

OPTIONS & ACCESSORIES

- Motorized damper
- Gravity (automatic) damper
- Wall mount bracket (for all sizes up to 24")
- Curb hinge
- Disconnect switches
- Roof Curbs
- Remote mount potentiometer
- Other base (curb cap) options available. See C2 in dimensions table.



705



ALX-DD-EC SERIES Downblast Direct Drive Exhausters WITH EC MOTOR

PERFORMANCE SPECIFICATIONS

Model	Motor			Airflow (CFM) @ Static Pressure																											
	HP	Variable Speed	Max RPM	0" SP				1/4" SP				1/2" SP				3/4" SP				1" SP				1-1/4" SP				1-1/2" SP			
				CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)	CFM	BHP	FEI	FEPAct (KW)
ALX150-DD100EC	1	Y	1600	2786	0.96	0.45	0.84	2664	0.98	0.62	0.86	2504	0.98	0.78	0.86	2348	0.98	0.92	0.86	2176	0.98	1.03	0.86	1982	0.96	1.14	0.84	1745	0.96	1.16	0.84
ALX165-DD100EC	1	Y	1475	2984	0.97	0.46	0.85	2796	0.98	0.64	0.86	2598	0.99	0.80	0.86	2385	0.99	0.93	0.86	2146	0.97	1.03	0.85	1913	0.97	1.09	0.85	1639	0.97	1.10	0.85
ALX180-DD100EC	1	Y	1200	3373	0.86	0.55	0.78	3179	0.91	0.75	0.82	2960	0.95	0.89	0.86	2717	0.98	1.00	0.89	2415	0.98	1.08	0.89	2061	0.97	1.11	0.88	-	-	-	-
ALX210-DD100EC	1	Y	900	4312	0.98	0.59	0.89	3942	0.98	0.82	0.89	3507	0.97	1.00	0.88	3051	0.97	1.11	0.88	2490	0.98	1.11	0.89	-	-	-	-	-	-	-	-

EC motors can be controlled using the built in potentiometer on motor or by using a 0 to 10 V controller, or by a remote potentiometer.
Minimum motor speed 425 RPM (EC Models)

Model	Motor			Airflow (CFM) @ Static Pressure													
	HP	Variable Speed	Max RPM	0.0"		.25"		.5"		.75"		1.00"		1.25"		1.5"	
				High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
ALX105-DD033EC	1/3	Y	1800	1100	239	1003	335	877	396	729	460	486	486	-	-	-	-
ALX120-DD033EC	1/3	Y	1700	1544	341	1406	400	1279	436	1095	438	810	472	-	-	-	-
ALX120-DD050EC	1/2	Y	1800	1610	341	1477	400	1357	436	1201	438	955	472	571	484	-	-
ALX135-DD033EC	1/3	Y	1350	1480	414	1316	494	1145	574	939	750	627	865	-	-	-	-
ALX135-DD050EC	1/2	Y	1550	1698	414	1562	494	1418	574	1254	750	1083	865	849	919	-	-
ALX135-DD075EC	3/4	Y	1800	1938	414	1830	494	1713	574	1582	750	1424	865	1269	919	1104	977
ALX150-DD033EC	1/3	Y	1250	1912	570	1702	499	1056	633	1139	812	-	-	-	-	-	-
ALX150-DD050EC	1/2	Y	1200	2113	570	1944	499	1770	633	1555	812	939	866	-	-	-	-
ALX150-DD075EC	3/4	Y	1480	2544	570	2389	499	2217	633	2045	812	1838	866	1568	879	-	-
ALX165-DD033EC	1/3	Y	1100	2055	860	1777	825	1430	1044	-	-	-	-	-	-	-	-
ALX165-DD050EC	1/2	Y	1250	2367	860	2112	825	1835	1044	1555	1194	1210	1320	-	-	-	-
ALX165-DD075EC	3/4	Y	1450	2707	860	2491	825	2263	1044	2029	1194	1808	1320	1466	1441	-	-

ALX UPBLAST SERIES AIRFLOW RANGE WITH EC MOTORS

