


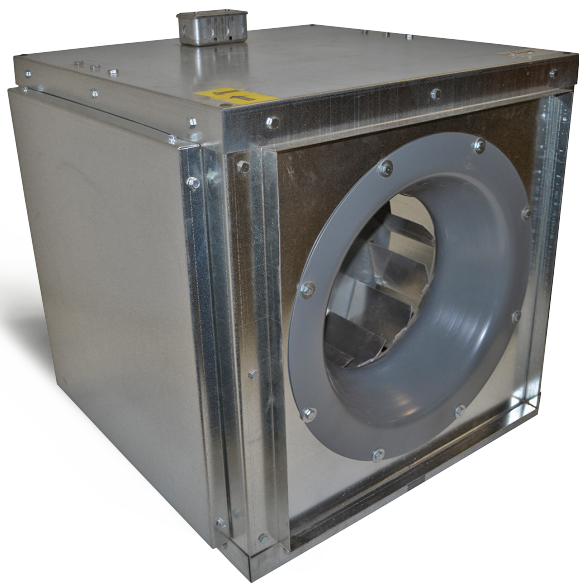


Backward Inclined Direct Drive Square Inline Blowers

GSQ-D SERIES

Insulated options available.

FEATURES

- Available in 9" to 18".
- High efficiency aluminum wheel.
- Side discharge option as standard - simply re-locate the side panel to the discharge.
- Bottom discharge available with flange kit.
- Junction box.
- GSQ-D-V with PSC variable speed motor.
- High Efficiency EC variable speed motor available.
- All standard single phase motor are single speed.
- All 3 phase motors are VFD compatible.
- Consult factory for different motor options.
- Multiple Mounting options.



*Shown with EC
motor*



RELATED MODEL

*DSQ-B
Backward Inclined Belt Drive
Square Inline Blower*

GSQ-D SERIES

Backward Inclined Direct Drive Square Inline Blowers

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP							
MODEL	1/4" SP	1/2" SP	3/4" SP	1" SP	1 1/4" SP	1 1/2" SP	HP
GSQ090-D-EC	425	325	175	--	--	--	1/4
GSQ105-D-V							
GSQ105-D-EC	1031	907	712	540	--	--	1/2
GSQ120-D-V							
GSQ120-D-EC	1650	1461	1278	1093	892	674	1/2
GSQ135-D-EC	2353	2177	1996	1821	1637	1435	3/4


TYPICAL MAXIMUM CFM @ SP																				
MODEL	1/4"				1/2"				3/4"				1"				1 1/4"			
	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP
GSQ150-D-EC	2750	0.99	0.6	0.88	2555	0.98	0.74	0.87	2365	0.98	0.86	0.87	2153	0.98	0.94	0.87	1974	0.99	1	0.88
GSQ165-D-EC	3209	0.98	0.69	0.87	2948	0.99	0.82	0.88	2666	0.99	0.93	0.88	2383	0.98	1.01	0.87	2083	0.98	1.05	0.87
GSQ180-D-EC	3678	0.98	0.76	0.87	3260	0.98	0.9	0.87	2804	0.96	0.99	0.86	2401	0.97	1.02	0.87	1841	0.91	1.01	0.82

CFM values listed above are summarized for convenience.

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B - Free inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

DIMENSIONS

GSQ-D DIRECT DRIVE BACKWARD INCLINED SQUARE INLINE BLOWER					
MODEL	A	B	A1	B1	H
GSQ090-D	15 5/64"	11 5/64"	18 37/64	11	15 7/16"
GSQ105-D	17 1/8"	14 5/8"	21 1/2"	15 3/8"	18 15/16"
GSQ120-D	20"	17"	24 3/8"	17 3/4"	21 13/16"
GSQ135-D	22"	18 3/4"	26 3/8"	19 1/2"	23 13/16"
GSQ150-D	24 1/2"	20 7/8"	38 3/8"	21 5/8"	26 5/16"
GSQ165-D	26 3/4"	23"	31 1/8"	23 3/4"	28 9/16"
GSQ180-D	29 5/8"	25 3/8"	34"	26 1/8"	31 7/16"



ACCESSORIES

- F-DSQ Filter section with 'V' bank 1" aluminum filters. (Filter rack will accept customer supplied 2" filters).
- Suspension or base mount vibration isolators.
- Insulated cabinet available (see price list).

F-GSQ FILTER SECTION					
MODEL	X	Y	Z	FILTER FACTOR	UNIT WEIGHT(LB5)
F-DSQ105	20"	14"	6"	7.085	10
F-DSQ120	20"	17"	6"	3.069	13
F-DSQ135	22"	18 3/4"	6"	2.184	15
F-DSQ150	24 1/2"	20 7/8"	14"	0.762	26
F-DSQ165	26"	23"	14"	0.63	27
F-DSQ180	28 5/8"	25 3/8"	14"	0.463	30

