


Horizontal Restaurant Exhauster

HRE SERIES

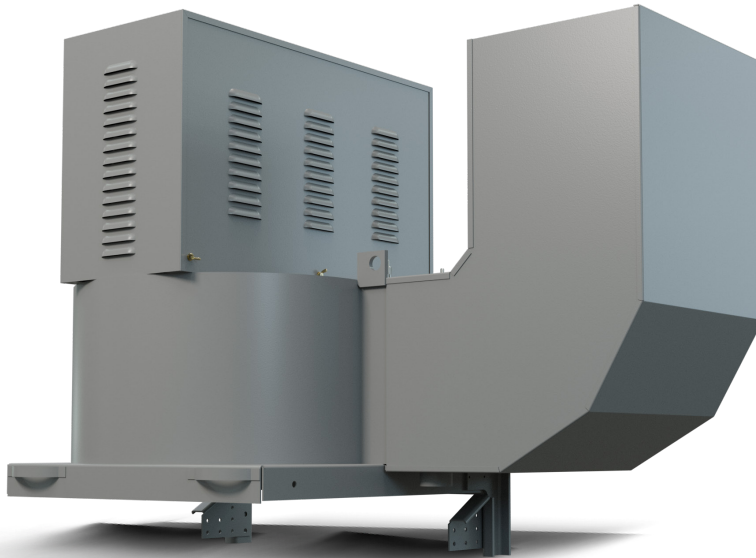

FEATURES


- UL705 Supplement SC Listed for the removal of cooking vapors
- Meets NFPA-96 Installation guidelines
- Convenient hinged curb mounting
- Clean-out access door
- Fully welded, 16 gauge or heavier blower housing c/w shaft seal to eliminate grease leakage
- 2 inch drain connection
- Pillow block ball bearings
- Upblast discharge directs exhaust away from roof
- Heavy duty, backward inclined non-overloading wheel

ACCESSORIES


- Vented roof curbs comes with hinge
- Discharge "V" cap (rain cap)




**AVAILABLE WITH MOTORS &
DRIVES Factory installed.**
Consult Delair Software for details

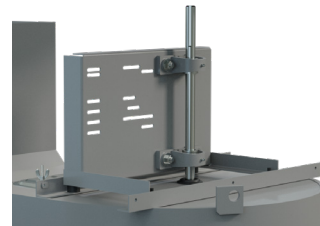

UNIT WITH COVER REMOVED

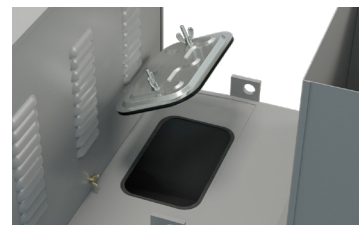

CONVENIENT CLEAN OUT
ACCESS DOOR

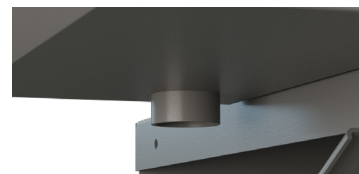

2" DRAIN CONNECTION




HRE SERIES


Horizontal Restaurant Exhauster

DIMENSIONS

TOP VIEW

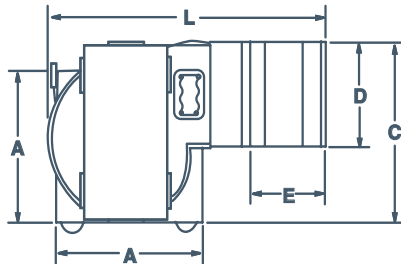

SIDE VIEW

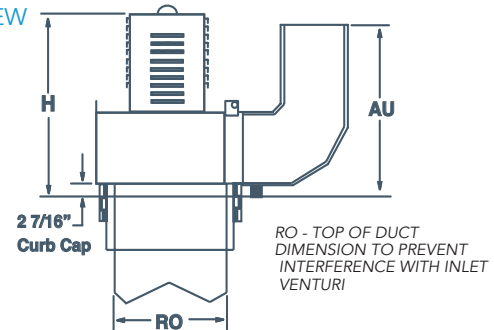

MODEL	A	CURB (SQUARE)	AU	C	D	E	H	L	RO	SHAFT DIAMETER	UNIT WEIGHT (LBS) (without motors & drives)
HRE-13	21 1/2"	20 1/2"	27 7/16"	25 1/4"	14 3/4"	10 5/8"	30 15/16"	41 7/8"	17 1/2"	1"	147
HRE-16	25 1/2"	24 1/2"	31 1/2"	30 3/8"	17 7/8"	13 1/4"	34 1/4"	48 11/16"	21 5/16"	1 3/16"	204
HRE-20	29 1/2"	28 1/2"	35 7/8"	36 1/8"	21 9/16"	15 5/8"	40 1/16"	56 1/8"	25 1/2"	1 3/16"	251
HRE-24	34 1/2"	33 3/8"	40 5/8"	43 3/8"	26 5/16"	19 1/2"	43 5/8"	66 7/8"	30 1/8"	1 7/16"	362

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1" SP				2" SP				3" SP				4" SP				5" SP				Min HP	Max HP
	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)		
HRE-13	2875	1.90	0.74	1.76	2449	1.91	0.92	1.77	2070	1.91	1.05	1.77	1706	1.94	1.09	1.80	1319	1.97	1.04	1.82	1/2	2
HRE-16	4160	2.83	0.69	2.55	3427	2.96	0.80	2.66	2712	2.92	0.87	2.63	2020	2.93	0.84	2.64	1404	2.99	0.74	2.69	3/4	3
HRE-20	6842	4.83	0.69	4.23	5993	4.80	0.88	4.21	5178	4.85	0.99	4.25	4275	4.94	1.01	4.32	3274	4.99	0.93	4.37	1	5
HRE-24	10697	7.45	0.80	6.41	9578	7.45	0.98	6.41	8371	7.34	1.10	6.32	6942	7.36	1.11	6.34	5602	7.49	1.05	6.45	1 1/2	7 1/2

CFM values listed are summarized for convenience. For full performance data refer to our Delair program.

Power rating (BHP) does not include motor or transmission losses. Performance is based on a Figure 15, A-type installation (free inlet and free outlet) including the recommended Canarm roof curb. Performance ratings do not include the effects of appurtenances (accessories).



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE



UL705 Supplement SC - Power Ventilator for Restaurant Exhaust
Appliances certified
Refer to our UL705 Supplement SC catalogue page in Roof Mount
Ventilation for all installation requirements.



WHAT IS UL705 SUPPLEMENT SC?

Power Ventilation for Restaurant Exhaust Appliances

Power ventilators for restaurant exhaust appliances covered by these requirements are intended for installation in accordance with the Standard of the National Fire Protection Association for the Installation of Equipment for the Removal of Smoke and Grease-Laden Vapors from Commercial Cooking Equipment, NFPA 96.

Power ventilators for restaurant appliances shall comply with the Standard for Power Ventilators, UL 705 - Power Ventilator for Restaurant Exhaust Appliances, modified in that wiring system shall not be located in the path of travel of exhaust products.

REQUIREMENTS

REQUIREMENT	ALX SERIES		BI-RM		HRE	
	STANDARD	ACCESSORY	STANDARD	ACCESSORY	STANDARD	ACCESSORY
Designed for removal of smoke and/or grease laden air	•		•		•	
Air temperatures up to 300°F	•		•		•	
Access for cleanout	•		•		•	
Grease drain	•		•		•	
Grease collection box		•		•		•
Minimum 500 FPM airflow in duct**	•		•		•	
Vented roof curb extending discharge minimum 40" above roofline		•	N/A*			•
Curb hinge		•	N/A			•


* must be mounted to extend outlet minimum 40" above roofline

** based on standard Canarm configurations with Motors and Drives, LMLD models must refer to Delair for minimum rPM to reach 500 FPM


UL705 SUPPLEMENT SC LISTED PRODUCTS



ALX SERIES
(upblast models only)



BI-RM SERIES



HRE SERIES