

Heavy Duty Belt Drive Wall Exhaust Fans

HV SERIES

Designed for heavy duty, commercial and industrial exhaust applications.


These fans are typically used for high volume, high static pressure applications.

The HV series is designed and constructed for efficient and economical operations while maximizing performance for heavy duty applications.

This fan is used for exhaust applications. Please consult factory for supply applications.


FEATURES

- Heavy gauge steel fan panel with deep spun and flared venturi for maximum efficiency.
- Heavy gauge welded steel motor and bearing supports.
- Galvanized heavy gauge steel fan blades that are statically and dynamically balanced.
- Heavy duty cast iron pillow block bearings.
- TEFC motors are standard.

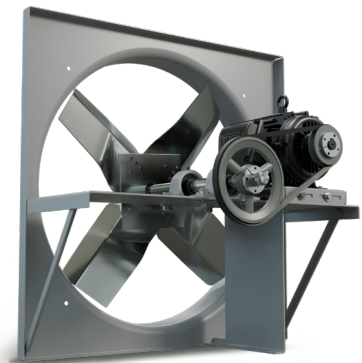

DIMENSIONS

MODEL	BLADE DIAMETER	A X A SQUARE	B	C (BELT DRIVE MOTOR FRAME)	
				56 - 184	213 - 286
HV24	24"	29.625"	4.0"	18"	--
HV30	30"	35.625"	4.5"	18"	--
HV36	36"	41.625"	5.0"	18"	28"
HV42	42"	47.625"	5.0"	18"	28"
HV48	48"	53.625"	5.0"	18"	28"
HV54	54"	59.657"	5.5"	18"	28"
HV60	60"	67.657"	6.0"	18"	28"

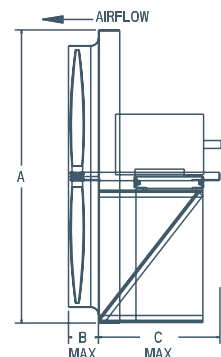

OPTIONS



For fan complete with cabinet/guard and shutter, substitute "T" with CBS



For fan complete with front sleeve and shutter, substitute "T" with SLS



For fan with rear sleeve and back guard, substitute "T" with SLB

HV SERIES

Heavy Duty

Belt Drive Wall Exhaust Fans

PERFORMANCE SPECIFICATIONS

		CFM @ STATIC PRESSURE																												
		MODEL #	WEIGHT (LBS.)	RPM	HP	dBA @ 5 ft	0"				1/8"				1/4"				1/2"				5/8"				3/4"			
							CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)
BLADE DIAMETER	24"	THREE PHASE																												