


Forward Curved Inline Duct Blowers

IDB SERIES

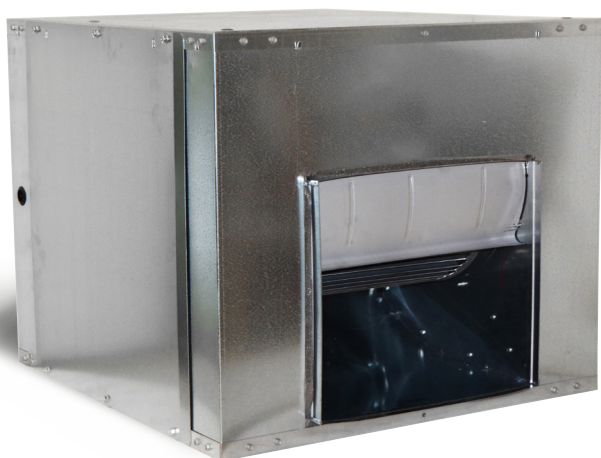

FEATURES


- Wheel Diameters: 7" through 15"
- CFM: Approximately 500 to 5700 CFM in a single blower.
- Constructed from galvanized steel for durability.
- Forward Curved blowers operate at low RPM for low noise levels.
- Heavy duty ball bearings suitable for -65° F to +250° F.
- Keywayed shafts both ends for clockwise or counter clockwise rotation.
- Saddle type motor mounting platform provides extended belt tension adjustment range on all IDB models.
- Will not "surge", "hunt" or "stall"
- Ideal for indoor applications.
- Optional variable pitch motor pulley permits field adjustment (typically + or - 15%) to match air delivery needs.
- Quiet forward curved blowers operate at ½ the rpm of other inline solutions.



AVAILABLE WITH MOTORS & DRIVES Factory installed.
Consult Delair Software for details



INSULATED OPTIONS AVAILABLE
For insulated or heavy duty applications, please reference our 200 and 9200 series literature.

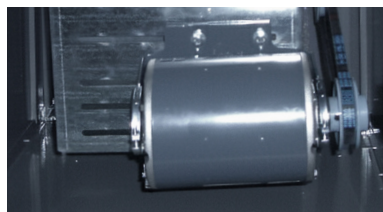

Saddle type motor mounting platform provides extended belt tension adjustment range on IDB models.



Forward curved blowers operate at low RPM for low noise.





IDB SERIES

Forward Curved **Inline** Duct Blowers

TYPICAL APPLICATIONS

- An Inline make-up air solution for cases where a rooftop curb mounted solution is not available.
- As an air moving module for systems built up with other components such as heating/cooling coils.
- Noise sensitive areas - the low rpm forward curved wheel typically radiates less vibration than higher rpm backward inclined wheel solutions.
- When the application requires an air mover in a duct system located in a ceiling space.
 - Redistribution or recirculation of air in a work space.
- Interlocked with entry doors to prevent entry of cold outdoor air into retail sales space and thus greets customers with warmth.
- Bathroom/ rest room exhaust - one duct blower serving multiple intakes.

PERFORMANCE SPECS

TYPICAL MAXIMUM CFM @ SPs																						
MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Min HP	Max HP
	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)		
IDB07	1400	0.68	0.8	0.69	1300	0.69	0.96	0.7	1100	0.66	1.05	0.67	1000	0.72	1.08	0.73	800	0.73	1.04	0.74	1/6	0.75
IDB09	2000	0.75	0.91	0.76	1800	0.75	1.09	0.76	1500	0.71	1.21	0.72	1100	0.71	1.12	0.72	800	0.71	1.04	0.72	1/6	0.75
IDB10	3000	1.46	0.77	1.38	2800	1.41	0.96	1.34	2600	1.49	1.04	1.41	2300	1.5	1.09	1.42	1900	1.47	1.08	1.39	1/6	1 1/2
IDB12	3700	1.44	0.86	1.37	3300	1.47	0.99	1.39	2900	1.5	1.07	1.03	2400	1.47	1.1	1.39	1600	1.43	0.93	1.36	1/6	1 1/2
IDB15	6100	2.9	0.77	2.61	5800	2.95	0.93	2.65	5000	2.98	0.96	2.68	4100	2.93	0.94	2.64	3700	2.93	1	2.64	1/3	3

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet.
Performance ratings do not include the effect of appurtenances (accessories).

DIMENSIONS

MODEL	A	B	C	OUTLET		F	G	H	J	K	INLET		SHAFT DIAMETER	WEIGHT (lbs) without motor
				D	E						L	M		
IDB07	18"	15 3/8"	23"	8 1/4"	9 3/16"	14 1/2"	9 5/8"	1 1/4"	1 1/4"	7/8"	15 7/8"	13 3/8"	3/4"	43
IDB09	21"	18"	23"	10 1/4"	11 13/16"	17 1/2"	11 3/4"	1 1/4"	1 3/4"	7/8"	19"	16"	3/4"	55
IDB10	22 1/4"	20"	24 3/4"	11 3/8"	13 1/8"	18 3/4"	13 3/8"	1 1/4"	1 3/4"	7/8"	20 1/4"	18"	3/4"	65
IDB12	27"	23"	27 1/2"	13 7/16"	15 5/8"	23 1/2"	16 1/8"	1 1/4"	1 3/4"	7/8"	25"	21"	3/4"	82
IDB15	33 1/2"	28"	32"	15 7/8"	18 5/8"	28"	19 1/2"	2 5/8"	1 3/4"	7/8"	30 1/2"	25"	1"	140



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE



NOTE: IDB-X MODELS ARE NOT ETL
OR AMCA CERTIFIED AT THIS TIME.



Canarm certifies that the IDB Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 & 311 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air and sound performance only. The Series shown herein are not approved by AMCA for FEI ratings. June 30 2026