


# Low Stand Industrial Mancoolers

---

**MCU, MCUA**

---

Designed to provide cooling effects  
to large open areas

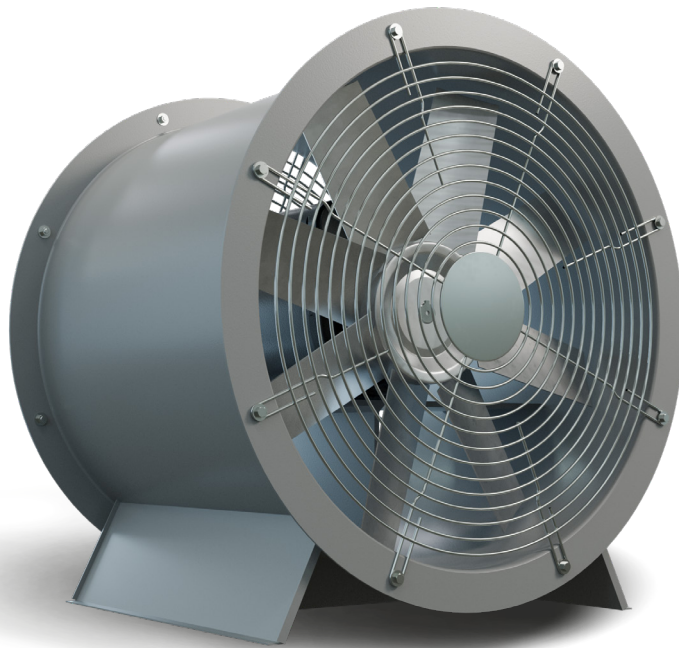

## FEATURES

- Drums and motor supports are constructed of heavy gauge steel.
- TEFC continuous duty, ball bearing motors are standard.
- All models are direct drive and available with steel blades or cast aluminum blades.
- Heavy duty, concentric circle, OSHA wire guards are standard on all sizes.
- Consult factory for availability of explosion-proof motors.

## OPTIONS

- Junction box installed on the outside of the fan body.



**CURRENTLY ONLY AVAILABLE IN CANADA**

# Low Stand Industrial Mancoolers

## PERFORMANCE SPECIFICATIONS


| MCU STEEL FAN BLADE |              |               |      |       |         |            |
|---------------------|--------------|---------------|------|-------|---------|------------|
|                     | MODEL        |               | RPM  | HP    | MCU CFM | dBA @ 5 Ft |
|                     | SINGLE PHASE | THREE PHASE   |      |       |         |            |
| 12"                 | MCU12T10033C | MCU12T30033C* | 1140 | 1/3   | 940     | 53         |
|                     | MCU12T10033B | MCU12T30033B* | 1750 | 1/3   | 1422    | 65         |
| 18"                 | MCU18T10025C | MCU18T30025C* | 1140 | 1/3   | 2654    | 64         |
|                     | MCU18T10050B | MCU18T30050B* | 1750 | 1/2   | 4016    | 74         |
| 24"                 | MCU24T10075C | MCU24T30075C* | 1140 | 3/4   | 6549    | 73         |
|                     | MCU24T10100B | MCU24T30100B* | 1750 | 1     | 6761    | 81         |
| 30"                 | MCU24T10300B | MCU24T30300B* | 1750 | 3     | 9909    | 84         |
|                     | --           | MCU30T30150C* | 1140 | 1 1/2 | 11600   | 79         |
| 36"                 | MCU30T10500B | MCU30T30500B* | 1750 | 5     | 17552   | 90         |
|                     | --           | MCU36T30200D* | 860  | 2     | 16364   | 80         |
| 42"                 | --           | MCU36T30500C* | 1140 | 5     | 21692   | 88         |
|                     | --           | MCU42T30500D* | 860  | 5     | 24499   | 85         |
| 48"                 | --           | MCU42T30500C* | 1140 | 5     | 23209   | 88         |
|                     | --           | MCU48T30750D* | 860  | 7 1/2 | 35654   | 89         |
|                     | --           | MCU48T30750C* | 1140 | 7 1/2 | 32563   | 92         |

| MCUA CAST ALUMINUM BLADE |               |                |      |       |          |            |
|--------------------------|---------------|----------------|------|-------|----------|------------|
|                          | MODEL         |                | RPM  | HP    | MCUA CFM | dBA @ 5 Ft |
|                          | SINGLE PHASE  | THREE PHASE    |      |       |          |            |
| 12"                      | MCUA12T10033C | MCUA12T30033C* | 1140 | 1/3   | 1450     | 58         |
| 18"                      | --            | MCUA18T30033C* | 1140 | 1/3   | 2990     | 60         |
|                          | MCUA18T10075B | MCUA18T30075B* | 1750 | 3/4   | 4590     | 71         |
| 24"                      | MCUA24T10100C | MCUA24T30100C* | 1140 | 1     | 6520     | 69         |
|                          | MCUA24T10150B | MCUA24T30150B* | 1750 | 1 1/2 | 7660     | 72         |
| 30"                      | MCUA24T10300B | MCUA24T30300B* | 1750 | 3     | 11500    | 79         |
|                          | MCUA30T10100C | MCUA30T30100C* | 1140 | 1     | 8680     | 69         |
| 36"                      | --            | MCUA30T30150C* | 1140 | 1 1/2 | 11800    | 73         |
|                          | MCUA30T10300B | MCUA30T30300B* | 1750 | 3     | 13300    | 78         |
| 42"                      | MCUA30T10500B | MCUA30T30500B* | 1750 | 5     | 18200    | 82         |
|                          | --            | MCUA36T30200C* | 1140 | 2     | 14000    | 76         |
| 48"                      | --            | MCUA36T30300C* | 1140 | 3     | 19400    | 77         |
|                          | MCUA36T10500B | MCUA36T30500B* | 1750 | 5     | 16200    | 78         |
| 54"                      | MCUA36T10750B | MCUA36T30750B* | 1750 | 7 1/2 | 21500    | 85         |
|                          | --            | MCUA42T30200D* | 860  | 2     | 19200    | 73         |
| 60"                      | --            | MCUA42T30300D* | 860  | 3     | 23210    | 75         |
|                          | --            | MCUA42T30500C* | 1140 | 5     | 25500    | 79         |
| 66"                      | --            | MCUA42T30750C* | 1140 | 7 1/2 | 30690    | 81         |
|                          | --            | MCUA42T31000B* | 1750 | 10    | 26700    | 86         |
| 72"                      | --            | MCUA48T30500D* | 860  | 5     | 29820    | 78         |
|                          | --            | MCUA48T30750D* | 860  | 7 1/2 | 35700    | 80         |
| 78"                      | --            | MCUA48T31000C* | 1140 | 10    | 39500    | 84         |
|                          | --            | MCUA48T31500C* | 1140 | 15    | 47300    | 86         |

For three phase motors, substitute "\*" with "M" for 230/460 volt (If 208V required please specify) or "P" for 575 volt  
dBA ratings shown are measured at 0" static pressure and should be used as a guideline only.

## DIMENSIONS

| FAN SIZE | A        | B   | C       | D       | E   | F   | G       | H (Hole Dia.) |
|----------|----------|-----|---------|---------|-----|-----|---------|---------------|
| 12"      | 10 1/4"  | 18" | 16"     | 14"     | 10" | 17" | 12"     | 7/16"         |
| 18"      | 13 1/4"  | 24" | 23"     | 21"     | 11" | 18" | 18 3/8" | 7/16"         |
| 24"      | 16 1/4"  | 30" | 28 1/2" | 26 1/2" | 13" | 21" | 24 3/8" | 1/2"          |
| 30"      | 19 1/4"  | 36" | 34 1/2" | 32 1/2" | 13" | 21" | 30 3/8" | 1/2"          |
| 36"      | 22 7/8"  | 42" | 40 1/2" | 38 1/2" | 19" | 27" | 36 3/8" | 1/2"          |
| 42"      | 25 3/8"  | 48" | 46 1/2" | 44 1/2" | 21" | 27" | 42 3/8" | 5/8"          |
| 48"      | 28 9/16" | 55" | 53 1/4" | 51 1/4" | 23" | 31" | 48 3/8" | 5/8"          |

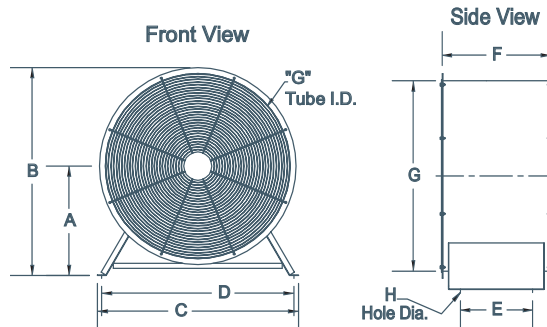

Non-stock, made-to-order products are non-returnable and cannot be cancelled.