



Low Leakage Steel Round Control Dampers

SCD-RD-LL

Designed and tested to provide an extremely tight seal which is cost effective for the majority of HVAC applications.

The SCD-RD-LL series dampers have pressure sensitive blade edge seals to provide the ultimate in sealing characteristics without unduly increasing torque requirements.

FEATURES

- **FRAME:** galvanized steel, rolled reinforcement.
DIAMETER GAUGE
5" - 9" 22 ga.
10" - 24" 20 ga.
- **SEALS:** dual durometer pressure sensitive blade edge and jamb seals
- **BLADE:** galvanized steel with welded channel reinforcement.
- **AXLES:** 3/8" square plated steel
- **FINISH:** mill galvanized
- **EXTENDED SHAFT:** Removable. 1/2" diameter, plated steel
- **MAXIMUM TEMPERATURE:** 200°F
- **DAMPER SIZES:** 5" to 24" diameter

Dampers are furnished approximately 1/8" smaller than given duct dimensions.

Non-standard shutters are non-returnable and cannot be cancelled.




FACTORY INSTALLED ELECTRIC OPERATORS AVAILABLE.

For dampers ordered with motor standard off bracket. Consult factory for details.

PERFORMANCE DATA

The SCD-RD-LL dampers have been tested to AMCA Standard 500-D with the following results:

	AT 1.0" w.g.	AT 2.5" w.g.	AT 4.0" w.g.
LEAKAGE (cfm/SQ FT)	1.0	1.5	4.0

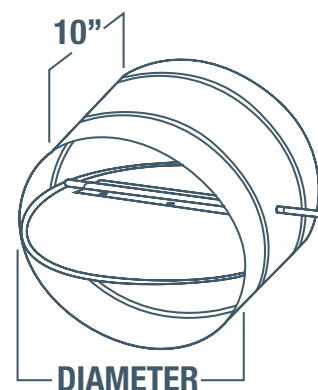

ORDERING METHOD

SCD-RD-LL-10
DAMPER STYLE DIAMETER

DAMPER STYLES: Standard model = SCD-RD; Low Leakage model = SCD-RD-LL