

Standard Wall Exhaust Fans WITH EC MOTOR

SD-EC SERIES



**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Available in 8" to 36" sizes.
- High efficiency totally enclosed EC motor.
- Rugged steel welded box housing with durable powder coat finish.
- OSHA guard on intake side of fan.
- Shipped completely assembled.
- 8" - 24" sizes feature tie bar shutters and magnets for quieter operation and superior seal.



ACCESSORIES

- Grey plastic weather hood
- Galvanized metal hood
- 0V to 10V Control

AIR CHANGES PER MINUTE

Application	Minutes per Air Change	Application	Minutes per Air Change
Assembly Hall	7	Church	15
Attic	2	Classroom	6
Auditorium	10	Dance Hall	5
Barber Shop	6	Department Store	6
Basement	8	Dry Cleaning	5
Battery Room	4	Engine Room	6
Boiler Room	1	Factory	6
Bowling Alley	5	Forge Room	3
Foundry	4	Pressing Room	1
Garage	5	Projection Booth	2
General Office	10	Summer Cooling	1
Gymnasium	8	Toilet	3
Laundry	2	Transformer Room	1
Locker Room	3	Warehouse	12
Machine Shop	8	Welding Shop	2
Plating Room	3		

To determine the proper fan for your applications, use the following formula.

Number of cubic feet in room / Number of minutes per air change
= Required CFM Capacity

EXAMPLE: A general office, (see chart) which requires an air change every ten minutes, would require the following fan capacity.

If the office is 100' x 40' x 10' = 40,000 cubic ft
40,000 cubic ft / 10 minutes per air change = 4000 Required CFM

From the chart, you would select a fan that is rated at 4000 CFM at 1/8" S.P. (Static Pressure)

SD-EC SERIES

Standard

Wall Exhaust Fans

with EC Motor WITH EC MOTOR


PERFORMANCE SPECIFICATIONS

MODEL	SPEED	BLADE DIAMETER	RPM	HP	VOLTAGE	AMPS (FLA)	WEIGHT (LBS)	dB(A) @5 ft	CFM @ STATIC PRESSURE				FRAMING DIMENSIONS
									0.00"	0.10"	0.125"	0.25"	
SD8-ECV	Variable	8"	1800	1/4	115/208-280	2.8/1.7-1.3	12	48	360	270	230	0	11" X 11"
SD10-ECV	Variable	10"	1800	1/4	115/208-280	2.8/1.7-1.3	13	56	690	590	570	0	13" X 13"
S12-EC	Variable	12"	1800	1/4	115/208-280	2.8/1.7-1.3	32	60	1650	1540	1510	1390	15" X 15"
S14-EC	Variable	14"	1800	1/4	115/208-280	2.8/1.7-1.3	34	65	2180	2080	2060	1890	17" X 17"
S16-EC	Variable	16"	1800	1/4	115/208-280	2.8/1.7-1.3	36	63	2370	2270	2210	2063	19" X 19"
S18-EC	Variable	18"	1800	1/2	115/208-280	3.5/2.2-1.7	37	73	3200	3090	3040	2920	21" X 21"
S20-EC	Variable	20"	1800	1/2	115/208-280	5.3/3.3-2.6	45	77	3440	3240	3180	2930	23" X 23"
SD24-EC	Variable	24"	1200	1/2	115/208-280	5.7/3.5-2.8	56	70	5050	4910	4810	4400	27" X 27"
SD30-EC	Variable	30"	1000	3/4	115/208-280	9.5/5.2-4.2	72	82	8000	7000	6000	5000	33" X 33"
SD36-EC	Variable	36"	1000	3/4	115/208-280	9.5/5.2-4.2	88	84	10000	8500	8000	6200	39" X 39"

subject to change without notice.

DIMENSIONS

FAN SIZE	A X A SQUARE	B	C	D (c/c)	E	N
8"	13 1/4"	13 1/2"	4"	12"	10 3/4"	2
10"	15 1/4"	13 1/2"	4"	14"	12 3/4"	2
12"	17 1/4"	16 1/2"	6"	16"	14 3/4"	3
14"	19 1/4"	16 1/2"	6"	18"	16 3/4"	3
16"	21 1/4"	16 1/2"	6"	20"	18 3/4"	4
18"	23 1/4"	16 1/2"	6"	22"	20 3/4"	4
20"	25 1/4"	17"	6 3/4"	24"	22 3/4"	5
24"	29 1/4"	18"	6 3/4"	28"	26 3/4"	5
30"	35 1/4"	19"	6"	34"	32 3/4"	16
36"	41 1/4"	19"	6"	40"	38 3/4"	20

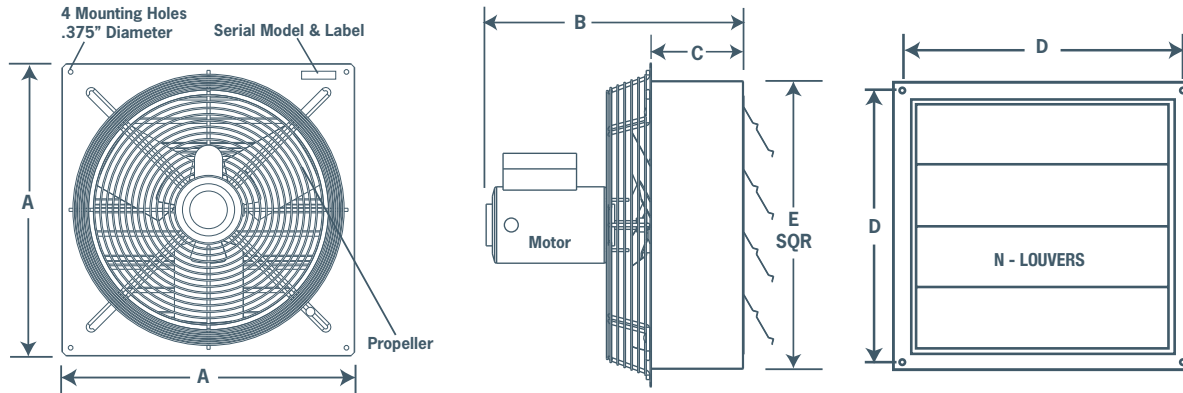

2 Speed Standard Wall Exhaust Fans

WITH EC MOTOR

SD08-EC, SD10-EC

**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Smooth, quiet, reliable, maintenance free operation.
- Durable steel construction with grey powder coat finish.
- 8" and 10" sizes.
- High efficiency EC motor
- 2 speed with optional speed control CNSC08/10EC (sold separately)
- Totally enclosed with sealed ball bearings
- Quiet, aluminum shutters with tie bar to maximize airflow and a magnet to prevent flapping and provide a superior seal.
- Zinc plated OSHA guard.
- Fans fully assembled.
- Easy to install. Mount fan using four screws.

ACCESSORIES

- Grey plastic weather hood
- Galvanized metal hood
 - 2 speed switch
 - Thermostat

AIR CHANGES PER MINUTE

To determine the proper fan for your applications, use the following formula.

Number of cubic feet in room / Number of minutes per air change
= Required CFM Capacity

EXAMPLE: A general office, (see chart) which requires an air change every ten minutes, would require the following fan capacity.

If the office is 100' x 40' x 10' = 40,000 cubic ft
40,000 cubic ft / 10 minutes per air change = 4000 Required CFM

From the chart, you would select a fan that is rated at 4000 CFM at 1/8" S.P. (Static Pressure)

Application	Minutes per Air Change	Application	Minutes per Air Change
Assembly Hall	7	Church	15
Attic	2	Classroom	6
Auditorium	10	Dance Hall	5
Barber Shop	6	Department Store	6
Basement	8	Dry Cleaning	5
Battery Room	4	Engine Room	6
Boiler Room	1	Factory	6
Bowling Alley	5	Forge Room	3
Foundry	4	Pressing Room	1
Garage	5	Projection Booth	2
General Office	10	Summer Cooling	1
Gymnasium	8	Toilet	3
Laundry	2	Transformer Room	1
Locker Room	3	Warehouse	12
Machine Shop	8	Welding Shop	2
Plating Room	3		

PERFORMANCE SPECIFICATIONS

MODEL	BLADE DIAMETER	HP	SPEED	VOLTAGE	MAX AMPS	RPM	CFM	dB(A) @5 ft	WEIGHT (LBS)
SD08-EC	8"	32W	2 Speed	115	0.27	1800/1300	360/300	48	13
SD10-EC	10"	32W	2 Speed	115	0.27	1800/1300	690/580	55	15

Please note: The above is subject to change without notice as these are still in development.

DIMENSIONS

MODEL	A x A SQUARE	B	C	D (c/c)	E SQR	N (# OF LOUVRES)	FRAMING
SD08-EC	13 x 13	8 7/8"	5 3/16"	11"	9 3/4"	2	10" x 10"
SD10-EC	15 x 15	8 7/8"	5 3/16"	13"	11 3/4"	3	12" x 12"

