



Forward Curved Roof Exhauster Belt Drive Utility Blower

600 SERIES

FEATURES

- Standard, vented motor and drive compartment cover with handles for safety and weather protection.
- Sliding motor base for belt tension adjustment.
- Standard top horizontal discharge position can be easily rotated to any of 8 positions.
- Shafts for 620, 622 & 625 models are keywayed for wheels and pulleys (610 to 618 models for pulleys only).
- Outlet flanges on models 620, 622 & 625.
- Available in CW or CCW rotation.
- Keywayed shaft.
- Heavy duty pillow block ball bearings.


ACCESSORIES

- Back Draft Dampers
- Inlet & Outlet Screens
- Corrosion Resistant Finishes
- Bolted Clean Out Door
- Heat Slinger
- 2" Drain Fitting
- Shaft Seal (vinyl or polyethylene)
- Vibration Isolation



AVAILABLE WITH MOTORS & DRIVES FACTORY INSTALLED

Consult FAN Software for details

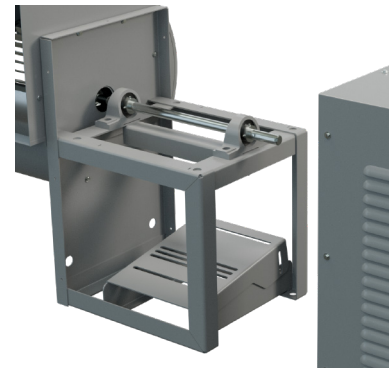

Motor and drive compartment with cover removed showing 3 side motor access and sloping motor base for belt tensioning.



600 SERIES

Forward Curved Roof Exhauster, Belt Drive Utility Blower


PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Min HP	Max HP
	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)	CFM	BHP	FEI	FEAct (kW)		
610	2600	1.99	0.61	1.84	2400	1.87	0.72	1.74	2300	1.95	0.80	1.80	2200	2	0.88	1.85	2000	1.83	0.99	1.70	1/6	2
612	3000	1.89	0.70	1.75	2800	1.86	0.82	1.73	2700	1.99	0.90	1.84	2500	1.98	0.97	1.83	2300	1.92	1.06	1.78	1/3	2
615	6189	4.5	0.69	3.98	5786	4.49	0.76	3.97	5457	4.5	0.83	3.98	5172	4.5	0.91	3.98	4903	4.52	0.97	4.00	1/3	3
618	6307	4.49	0.58	3.97	5965	4.51	0.69	3.99	5487	4.5	0.75	3.98	5036	4.5	0.81	3.98	4844	2.5	0.90	3.97	1/2	5
620	10300	9.78	0.48	8.34	9900	9.8	0.57	8.36	9600	9.98	0.64	8.51	9200	9.82	0.73	8.38	8900	10	0.79	8.53	1/2	7 1/2
622	11500	9.83	0.49	8.38	11000	9.99	0.58	8.52	10400	9.79	0.67	8.35	10000	10	0.74	8.53	9400	9.83	0.81	8.38	1/2	7 1/2
625	14300	9.95	0.57	8.48	13500	9.99	0.68	8.52	12500	9.86	0.76	8.41	11900	10	0.84	8.53	11400	9.96	0.94	8.49	1	10

CFM values listed are summarized for convenience. For full performance data refer to our FAN program.

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).

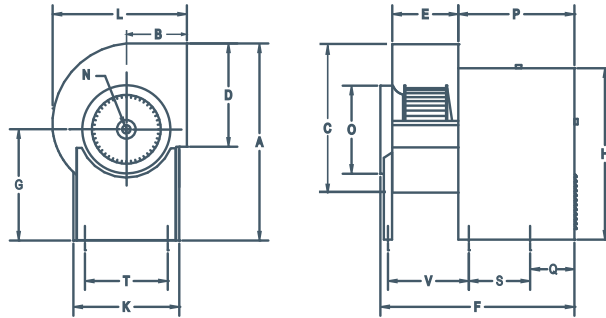

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	K	L	N	O	P	Q	S	T	V	WHEEL DIAMETER	WHEEL WIDTH	WEIGHT (lbs) without motor
610	24 13/16"	8"	17 7/16"	11 3/8"	9 3/16"	28 9/16"	15 1/16"	21 5/16"	13 3/16"	16 3/4"	3/4"	12"	17 1/4"	3 3/4"	11 3/4"	11 7/16"	--	11 1/8"	7 3/16"	57
612	26 9/16"	9 1/8"	20 1/4"	13 7/16"	9 3/16"	28 9/16"	15 1/16"	21 5/16"	13 3/16"	19 1/2"	3/4"	14"	17 1/4"	3 3/4"	11 3/4"	11 7/16"	--	12 7/8"	7 3/16"	60
615	36 3/4"	11 1/4"	28 1/16"	17"	12 1/2"	35 7/8"	20 1/16"	29 1/8"	16 9/16"	25 15/16"	1"	17"	21 1/8"	--	11 1/2"	14 11/16"	15 5/8"	15 1/2"	9 9/16"	124
618	36 5/16"	12 3/8"	28 7/8"	18 7/8"	14"	37 3/8"	20 1/16"	29 1/8"	16 9/16"	27"	1"	18"	21 1/8"	--	11 1/2"	14 11/16"	17 1/8"	18 1/2"	10 13/16"	144
620	48 9/16"	14 7/16"	35 3/4"	24 3/4"	15 3/4"	46 7/16"	28"	40 7/8"	25 1/4"	32 7/16"	1 3/16"	21"	27 11/16"	--	14 5/8"	22 1/2"	18 7/8"	20 7/16"	10 1/4"	278
622	50 9/16"	15 11/16"	39 3/8"	27 1/4"	17 1/8"	47 13/16"	28"	40 7/8"	25 1/4"	35 1/2"	1 3/16"	22 1/2"	27 11/16"	--	14 5/8"	22 1/2"	20 1/4"	22 1/8"	11 1/4"	296
625	53 11/16"	17 1/4"	44 3/8"	31 1/4"	19 5/8"	50 5/16"	28"	40 7/8"	25 1/4"	39 5/8"	1 3/16"	26 3/4"	27 11/16"	--	14 5/8"	22 1/2"	22 3/4"	25 1/4"	13"	329



SCAN TO VIEW FEI CHARTS



SCAN TO USE FAN SOFTWARE



Intertek



Canarm certifies that the 600 Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air performance only. The 600 Series shown herein are not approved by AMCA for FEI ratings. May 2026

Options & Accessories




BACKDRAFT DAMPERS

- Fits the outlet of all 200, 400, 600, 9200 and BI Series Utility Blowers.
- Constructed of 16 ga. aluminum.
- Gravity activated.
- Easily field installed.



INLET SCREENS

- Fits all single outlet 400, 600 and BI Series Utility Blowers.
- Round inlet screens mount on the inlet collars of the blowers.
- Easily field installed.




OUTLET SCREENS

- Fits all single inlet 400, 600 and BI Series Utility Blowers.
- Rectangular outlet screens mount over the square outlet of the units.
- Easily field installed.



BOLTED CLEAN OUT DOOR

- Allows easy access for inspection and cleaning of the wheel & housing.
- A tight pattern of bolts holds the gasketed door in place on the curved face of the scroll shaped wheel housing.



V CAP

- For BI upblast utility sets to reduce rain and snow entry.
- Easily field installed above the blower outlet.



HEAT SLINGER

- Cast aluminum disk with radial blades, split for easy field installation on the shaft between the housing and the inboard bearing.
- Can be used on Canarm BI/600 units.
- Provides protection for the bearing from excessive heat. The slinger dissipates heat from the shaft before reaching the bearing and increases the air flow across the inboard bearings.
- Good for a maximum of 400° Fahrenheit air stream temperature.



SHAFT SEAL

- Good for a maximum of 220° Fahrenheit.
- Prevents migration of fumes, grease vapors, dust etc from the airstream into the compartment housing motors, drives and bearings.
- Can be used on Canarm's BI/600 Utility units.
- Easily field installed.
- Installed on the shaft between the bearing plate and back panel in the motor compartment.
- Constructed of 1/4" thick polyethylene for a good seal and resistance to many substances.



DRAIN FITTING

- Large, 2" diameter threaded pipe fitting resists clogging.
- Can be connected to a drainage system if desired.
- Factory welded in place, prior to painting.
- Also available separately.




VIBRATION ISOLATORS RUBBER

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.




VIBRATION ISOLATORS SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor use only.



VIBRATION ISOLATORS OUTDOOR SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Designed for outdoor use. Housed to resist lateral motion from winds.



ALUMINUM WHEEL

- For use with the BI & BI-RM series units.
- AMCA type B classification for spark resistant construction