

Heavy Duty DWDI Framed Blowers

900 SERIES

Heavy duty, double width, double inlet, framed blowers with pillow block bearings.

FEATURES

- Pillow block bearings mounted on "T" bar support.
- Corrosion resistant galvanized blower housing.
- Available as single and twin assemblies.
- All wheels capable of running at AMCA Class II operating conditions with appropriate shaft and bearings.
- Welded angular steel blower frames with T bar supports under bearings when used in bottom horizontal discharge (BHD) mounting position. Suitable for operation in top horizontal discharge (THD), upblast (UB) or downblast (DB) discharge position.
- Frames and bearing supports are baked powder coat finished.
- Pre-lubricated cast iron pillow block ball bearings with grease fitting suitable for operating in ambient temperatures from -30 to +230° F.
- Shaft extensions keywayed both ends suitable for single or double groove pulleys.
- Corrosion inhibiting shaft coating.
- Units skidded for shipment.



ACCESSORIES

- Models 907 to 915 - Motor mounting bracket with mounting and belt tension adjusting hardware.
- Models 912 to 936 - 1 to 15 HP motor platform with mounting hardware.
- Models 918 to 936 - 20 to 50 hp motor platform with mounting hardware.



TWIN UNIT

Use a common shaft for balanced air supply by each blower. Call for pricing & availability.

900 SERIES

Double Width Double Inlet Framed Blowers

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP			
	CFM	BHP	FEI	FE _{Pact} (kW)	CFM	BHP	FEI	FE _{Pact} (kW)	CFM	BHP	FEI	FE _{Pact} (kW)	CFM	BHP	FEI	FE _{Pact} (kW)	CFM	BHP	FEI	FE _{Pact} (kW)
907	2917	4.86	0.47	4.26	2843	4.76	0.53	4.17	2757	4.66	0.58	4.09	2688	4.72	0.62	4.14	2610	4.76	0.66	4.17
909-7	3800	4.78	0.63	4.19	3700	4.74	0.69	4.16	3600	4.71	0.75	4.13	3500	4.68	0.81	4.11	3400	4.66	0.85	4.09
909	5146	9.87	0.43	8.42	5052	9.68	0.48	8.26	4965	9.58	0.54	8.18	4851	9.45	0.58	8.07	4726	9.45	0.62	8.07
910-8	5700	9.62	0.58	8.21	5600	9.59	0.63	8.19	5500	9.57	0.67	8.17	5400	9.52	0.72	8.13	5300	9.47	0.77	8.09
910	6463	9.83	0.55	8.38	6335	9.80	0.61	8.36	6183	9.74	0.66	8.31	6031	9.74	0.70	8.31	5893	9.83	0.74	8.38
912-9	7600	9.67	0.72	8.25	7500	9.91	0.77	8.45	7300	9.82	0.82	8.38	7100	9.78	0.87	8.34	6900	9.76	0.91	8.33
912	8696	9.93	0.68	8.47	8428	9.88	0.74	8.43	8151	9.85	0.79	8.40	7864	9.80	0.84	8.36	7596	9.80	0.88	8.36
915-10	8127	9.88	0.51	8.43	7828	9.89	0.57	8.43	7498	9.80	0.62	8.36	7104	9.98	0.64	8.51	6741	9.96	0.68	8.49
915	12181	14.80	0.63	12.50	11857	14.86	0.69	12.50	11506	14.80	0.74	12.50	11164	14.81	0.79	12.50	10794	14.86	0.83	12.50
918-13	13300	14.82	0.67	12.50	12800	14.85	0.71	12.50	12300	14.82	0.76	12.50	12000	14.82	0.82	12.50	11800	14.94	0.88	12.60
918	17399	19.91	0.68	16.70	16820	19.83	0.73	16.60	16315	19.89	0.78	16.70	15812	19.95	0.83	16.70	15263	19.92	0.87	16.70
920-18	19685	19.79	0.60	16.60	19089	19.89	0.68	16.70	18375	19.76	0.74	16.50	17759	19.87	0.80	16.60	17050	19.71	0.86	16.50
920	25101	39.82	0.47	32.90	24528	39.81	0.52	32.90	23992	39.83	0.57	32.90	23474	39.85	0.62	32.90	22938	39.79	0.66	32.90
922	28390	39.98	0.48	33.00	27774	39.79	0.55	32.90	27256	39.92	0.60	33.00	26714	39.92	0.66	33.00	26147	39.84	0.72	32.90
925	33347	39.95	0.49	33.00	32827	39.92	0.57	33.00	32235	39.78	0.65	32.90	31346	38.87	0.73	32.10	30925	39.72	0.79	32.80
927	47787	49.93	0.70	41.10	46172	49.70	0.76	40.90	44434	49.88	0.81	41.10	42825	49.76	0.85	41.00	41439	49.79	0.90	41.00
930	54011	57.00	0.68	46.80	52276	57.01	0.74	46.80	50664	56.95	0.80	46.80	49131	57.17	0.85	47.00	47440	57.18	0.90	47.00
933	72000	95.31	0.58	77.80	70000	93.81	0.64	76.60	69000	96.45	0.69	78.70	68000	99.71	0.73	81.30	66000	99.78	0.77	81.40
936	75604	93.74	0.60	76.50	75264	99.51	0.65	81.10	73397	99.70	0.70	81.30	71481	99.67	0.75	81.30	69626	99.80	0.80	81.40

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).

DIMENSIONS

MODEL	A	B	C	D	E	F (See Note)	G	H	J	K	L	M	N (See Note)	P	Q	R	U	UNIT WEIGHT (LBS) (without motor & drives)
907	14 3/8"	6 7/16"	6 1/16"	8 1/4"	9 3/16"	17 3/16"	8 5/8"	10 3/8"	11 5/8"	9"	11 3/4"	3/4"	3/4"	11 3/8"	4 5/8"	1 1/2"	7/16 x 5/8	22
909-7	17 1/4"	7 15/16"	7 5/16"	10 1/4"	9 3/16"	17 3/16"	10 1/8"	10 3/8"	14 1/2"	11 3/4"	14 1/2"	3/4"	3/4"	11 3/8"	5 1/2"	1 1/2"	7/16 x 5/8	27
909	17 1/4"	7 15/16"	7 5/16"	10 1/4"	11 13/16"	19 13/16"	10 1/8"	12 15/16"	14 1/2"	11 3/4"	14 1/2"	3/4"	3/4"	13 15/16"	5 1/2"	1 1/2"	7/16 x 5/8	32
910-8	19 1/8"	9"	8"	11 3/8"	10 1/2"	18 1/2"	11 1/4"	11 5/8"	16 1/2"	13 3/8"	16 1/4"	3/4"	3/4"	12 5/8"	6 1/4"	1 1/2"	7/16 x 5/8	35
910	19 1/8"	9"	8"	11 3/8"	13 1/8"	21 5/8"	11 1/4"	14 1/4"	16 1/2"	13 3/8"	16 1/4"	3/4"	1"	15 1/4"	6 1/4"	1 1/2"	7/16 x 5/8	43
912-9	22 1/4"	10 5/8"	9 1/8"	13 7/16"	12 1/4"	20 3/4"	13"	13 3/8"	19 5/8"	16 1/4"	19"	3/4"	1"	14 3/8"	7 5/16"	1 1/2"	7/16 x 5/8	48
912	22 1/4"	10 5/8"	9 1/8"	13 7/16"	15 5/8"	24 1/8"	13"	16 3/4"	19 5/8"	16 1/4"	19"	3/4"	1"	17 3/4"	7 5/16"	1 1/2"	7/16 x 5/8	59
915-10	26"	12 9/16"	10 5/16"	15 7/8"	14 11/16"	23 3/16"	15 1/4"	15 13/16"	23 3/8"	19 3/8"	22 1/8"	3/4"	1"	16 13/16"	8 5/8"	1 1/2"	7/16 x 5/8	62
915	26"	12 9/16"	10 5/16"	15 7/8"	18 5/8"	27 1/8"	15 1/4"	19 3/4"	23 3/8"	19 3/8"	22 1/8"	3/4"	1"	20 3/4"	8 5/8"	1 1/2"	7/16 x 5/8	76
918-13	30 3/4"	14 15/16"	12 3/8"	18 7/8"	17 3/8"	28 1/2"	17 3/4"	19"	29"	24 1/2"	26 1/2"	3/4"	1 3/16"	20 1/2"	10 3/8"	1 1/2"	7/16 x 5/8	120
918	30 3/4"	14 15/16"	12 3/8"	18 7/8"	21 7/8"	34"	17 3/4"	23 1/2"	29"	24 1/2"	26 1/2"	3/4"	1 3/16"	25"	10 3/8"	1 1/2"	7/16 x 5/8	115
920-18	38"	18 5/16"	14 7/16"	24 3/4"	22 3/4"	36"	22 9/16"	24 1/4"	32 1/4"	25 1/2"	31 1/4"	1 1/2"	1 3/16"	26 3/4"	11 1/4"	2"	5/8"	202
920	38"	18 5/16"	14 7/16"	24 3/4"	24 3/4"	37 1/4"	22 9/16"	26 1/4"	32 1/4"	25 1/2"	31 1/4"	1 1/2"	1 3/16"	28 3/4"	11 1/4"	2"	5/8"	202
922	41 1/2"	20 1/16"	15 11/16"	27 1/4"	27 1/4"	39 3/4"	24 5/8"	28 3/4"	35 3/4"	28 1/2"	34 1/4"	1 1/2"	1 3/16"	31 1/4"	12 1/4"	2"	5/8"	226
925	46 3/4"	22 5/8"	17 1/4"	31 1/4"	31 1/4"	43 3/4"	27 3/4"	32 3/4"	41"	32 3/4"	38 3/8"	1 1/2"	1 3/16"	35 1/4"	13 1/2"	2"	5/8"	276
927	51 1/2"	25 1/16"	19 1/8"	34 1/4"	34 1/4"	50 1/4"	30 1/4"	35 3/4"	46 1/2"	37 11/16"	42 11/16"	1 1/2"	1 11/16"	38 1/4"	15 1/4"	2"	5/8"	400
930	55 1/2"	27 1/16"	20 5/16"	36 3/4"	36 3/4"	52 3/4"	32 5/8"	38 1/4"	50 1/2"	40 7/8"	45 7/8"	1 1/2"	1 11/16"	40 3/4"	16 3/4"	2"	5/8"	505
933	59 3/4"	29 1/8"	24 5/8"	42 15/16"	39 3/4"	58 3/4"	34 1/4"	41 3/4"	54 3/4"	47 1/4"	52 1/4"	1 1/2"	2 3/16"	43 3/4"	14 13/16"	2"	5/8"	610
936	59 3/4"	29 1/8"	24 5/8"	42 15/16"	42 3/4"	61 3/4"	34 1/4"	44 3/4"	54 3/4"	47 1/4"	52 1/4"	1 1/2"	2 3/16"	46 3/4"	14 13/16"	2"	5/8"	685

NOTE: "F" Dimension may vary among optional shaft diameters.
Standard shaft sizes shown.
Larger diameter shafts available.



All wheels can run safely at AMCA Class II operating conditions with appropriate shaft & bearings.



SCAN TO
VIEW FEI
CHARTS




SCAN TO
USE DELAIR
SOFTWARE

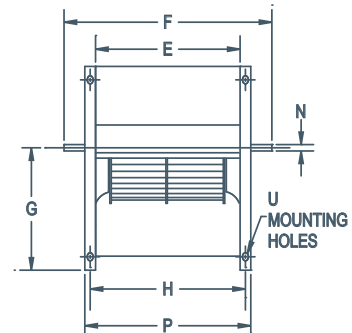

Options & Accessories Motor Platforms

TRADITIONAL STYLE (POWDER COATED PARTIAL ASSEMBLY)

Part #	HP	Fits Models	Unit Weight (lbs)	Shipping Weight (lbs)
9200011	1 - 15	912,915,915-10, 918-13	28	31
9200002		918	30	32
9200003		920, 922, 920-18	35	38
9200004		925	37	40
9200017		927, 930	50	55
9200019		933, 936	55	60
9200018	20 - 50	918	72	75
9200008		920, 922, 920-18	72	88
9200009		925	72	88
9200020		927, 930	85	95
9200021		933, 936	85	95

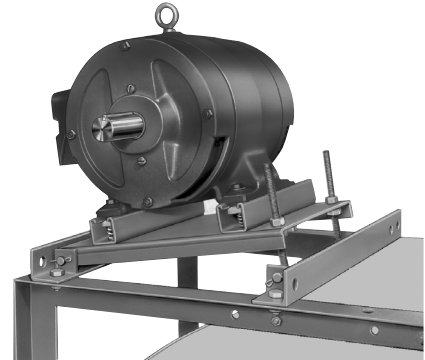

GALVANIZED (KNOCKDOWN)

Part #	HP	Fits Models	Shipping Weight (lbs)
9200011-G	Up to 5 HP	912,915,915-10, 918-13	31
9200002-G	Up to 5 HP	918	32
9200003-G	Up to 5 HP	920, 922, 920-18	38
9200004-G	Up to 5 HP	925	40
9200017-G	Up to 5 HP	927, 930	55
9200019-G	Up to 5 HP	933, 936	60



PAINTED (KNOCKDOWN)

Part #	HP	Fits Models	Shipping Weight (lbs)
9200040	7.5 to 15 HP	912,915,915-10, 918-13	31
9200041	7.5 to 15 HP	918	32
9200042	7.5 to 15 HP	920, 922, 920-18	38
9200043	7.5 to 15 HP	925	40
9200044	7.5 to 15 HP	927, 930	55
9200045	7.5 to 15 HP	933, 936	60

