



Downblast Direct Drive Exhausters

WITH EC MOTOR

ALX-DD-EC SERIES

Ideal for exhausting air from factories, offices, warehouses or commercial buildings. The ALX series spun aluminum exhaust fan can be used as either a roof top or wall mount exhaust fan.

**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Spun aluminum housing will not rust, chip or peel.
- Aluminum backward inclined wheel is non-overloading.
- For models with PSC Motors see ALX-DD.
- All motors are 1 Phase 120/240V operation and can be operated at 50 or 60 Hz.
- All units can be wall mounted.
- Quick release latches for easy motor access on ALX135 – ALX165.
- Comes with bird screen.
- EC motors offer true variable speed operation and up to 70% energy savings over PSC motors.
- On-board speed adjustment allows simple setup and balancing with LED display.
- Can be controlled remotely up to 50' using a remote mount potentiometer or 0-10V.




**QUICK RELEASE LATCHES
FOR EASY MOTOR ACCESS**

DISCONNECT SWITCHES

Disconnect switches are available. See Controls & Thermostats section for details.

DIMENSIONS

MODEL	DIMENSIONS (INCHES)										WEIGHT (lbs)
	A	B	C	C2	D	E	F	G Ø	Wheel Diameter	Roof Opening	
ALX105-DD-EC	18.00	25.00	19.00	21.00	2.50	1.50	3.50	0.38	10.50	15.00	33
ALX120-DD-EC	19.00	25.00	19.00	21.00	3.50	1.50	3.50	0.38	12.25	15.00	35
ALX135-DD-EC	22.25	31.25	21.00	24.75	3.13	2.00	3.75	0.44	13.50	17.00	51
ALX150-DD-EC	23.13	31.25	21.00	24.75	3.75	2.00	3.75	0.44	15.00	17.00	56
ALX165-DD-EC	27.13	36.25	24.75	28.00	5.00	2.00	4.00	0.44	16.50	20.75	100
ALX180-DD-EC	31.75	36.25	28.00	24.75	5.50	2.00	4.00	0.44	18.25	20.75	114
ALX210-DD-EC	36.25	43.75	33.13	40.00	5.25	2.50	4.00	0.44	21.00	29.00	176

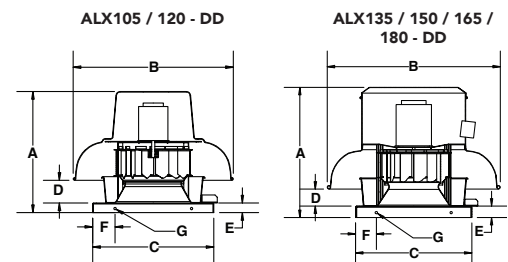

OPTIONS & ACCESSORIES

- Motorized damper
- Gravity (automatic) damper
- Wall mount bracket (for all sizes up to 24")
- Curb hinge
- Disconnect switches
- Roof Curbs
- Remote mount potentiometer
- Other base (curb cap) options available. See C2 in dimensions table.



705



ALX-DD-EC SERIES Downblast Direct Drive Exhausters WITH EC MOTOR


PERFORMANCE SPECIFICATIONS

Model	Motor			Airflow (CFM) @ Static Pressure																											
	HP	Variable Speed	Max RPM	0" SP				1/4" SP				1/2" SP				3/4" SP				1" SP				1-1/4" SP				1-1/2" SP			
				CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
ALX150-DD100EC	1	Y	1600	2786	0.96	0.45	0.84	2664	0.98	0.62	0.86	2504	0.98	0.78	0.86	2348	0.98	0.92	0.86	2176	0.98	1.03	0.86	1982	0.96	1.14	0.84	1745	0.96	1.16	0.84
ALX165-DD100EC	1	Y	1475	2984	0.97	0.46	0.85	2796	0.98	0.64	0.86	2598	0.99	0.80	0.86	2385	0.99	0.93	0.86	2146	0.97	1.03	0.85	1913	0.97	1.09	0.85	1639	0.97	1.10	0.85
ALX180-DD100EC	1	Y	1200	3373	0.86	0.55	0.78	3179	0.91	0.75	0.82	2960	0.95	0.89	0.86	2717	0.98	1.00	0.89	2415	0.98	1.08	0.89	2061	0.97	1.11	0.88	-	-	-	-
ALX210-DD100EC	1	Y	900	4312	0.98	0.59	0.89	3942	0.98	0.82	0.89	3507	0.97	1.00	0.88	3051	0.97	1.11	0.88	2490	0.98	1.11	0.89	-	-	-	-	-	-	-	-

EC motors can be controlled using the built in potentiometer on motor or by using a 0 to 10 V controller, or by a remote potentiometer.
Minimum motor speed 425 RPM (EC Models)

Model	Motor			Airflow (CFM) @ Static Pressure															
	HP	Variable Speed	Max RPM	0.0"		.25"		.5"		.75"		1.00"		1.25"		1.5"			
				High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low		
ALX105-DD033EC	1/3	Y	1800	1100	239	1003	335	877	396	729	460	486	486	-	-	-	-		
ALX120-DD033EC	1/3	Y	1700	1544	341	1406	400	1279	436	1095	438	810	472	-	-	-	-		
ALX120-DD050EC	1/2	Y	1800	1610	341	1477	400	1357	436	1201	438	955	472	571	484	-	-		
ALX135-DD033EC	1/3	Y	1350	1480	414	1316	494	1145	574	939	750	627	865	-	-	-	-		
ALX135-DD050EC	1/2	Y	1550	1698	414	1562	494	1418	574	1254	750	1083	865	849	919	-	-		
ALX135-DD075EC	3/4	Y	1800	1938	414	1830	494	1713	574	1582	750	1424	865	1269	919	1104	977		
ALX150-DD033EC	1/3	Y	1250	1912	570	1702	499	1056	633	1139	812	-	-	-	-	-	-		
ALX150-DD050EC	1/2	Y	1200	2113	570	1944	499	1770	633	1555	812	939	866	-	-	-	-		
ALX150-DD075EC	3/4	Y	1480	2544	570	2389	499	2217	633	2045	812	1838	866	1568	879	-	-		
ALX165-DD033EC	1/3	Y	1100	2055	860	1777	825	1430	1044	-	-	-	-	-	-	-	-		
ALX165-DD050EC	1/2	Y	1250	2367	860	2112	825	1835	1044	1555	1194	1210	1320	-	-	-	-		
ALX165-DD075EC	3/4	Y	1450	2707	860	2491	825	2263	1044	2029	1194	1808	1320	1466	1441	-	-		

ALX UPBLAST SERIES AIRFLOW RANGE WITH EC MOTORS

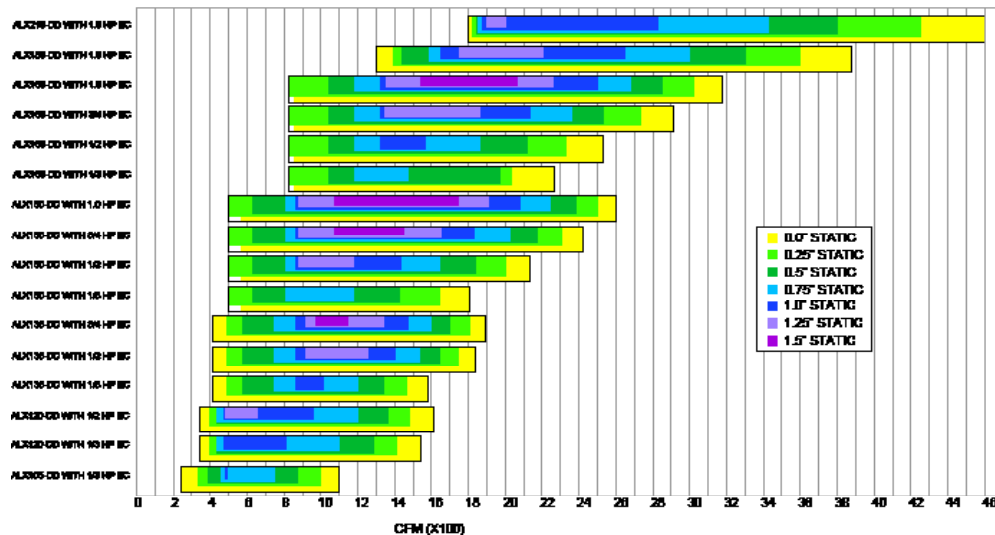

Options & Accessories Roof Curbs

NON-VENTED FOR 300, 700, SIS, ALX, SB-SBRM & SD-SDUB SERIES




RCG ROOF CURB

- RCG are 18" high, RCGL are 12" high
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Insulated curbs available (RCGI or RCGLI)
- Shipped fully assembled

Please note Galvanized Curbs (RCG's) are for UL705 only.
For UL762 the curb must be vented and be a minimum of 40" from roof to outlet - use RCGV curbs (below)

Part # (Non-Insulated)	Part # (Insulated)	Curb OD Dimension sq	Curb fits Models
RCG17.5 / RCGL17.5	RCGI17.5 / RCGLI17.5	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCG18.5 / RCGL18.5	RCGI18.5 / RCGLI18.5	18.5"	307
RCG19.5 / RCGL19.5	RCGI19.5 / RCGLI19.5	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, ALX105-C2, ALX120-C2
RCG22.5 / RCGL22.5	RCGI22.5 / RCGLI22.5	22.5"	309,709,SIS-09
RCG23.25 / RCGL23.25	RCGI23.25 / RCGLI23.25	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, ALX135-C2, ALX150-C2, ALX180-C2
RCG26.5 / RCGL26.5	RCGI26.5 / RCGLI26.5	26.5"	ALX180, SIS-10, SB-SBRM-18, ALX165-C2
RCG30.5 / RCGL30.5	RCGI30.5 / RCGLI30.5	30.5"	312,712,715, SIS-12, SIG-12, SIG-15
RCG31.5 / RCGL31.5	RCGI31.5 / RCGLI31.5	31.5"	ALX210, ALX245, SB-SBRM-24
RCG34.5 / RCGL34.5	RCGI34.5 / RCGLI34.5	34.5"	315,718,SIS-15,SIS-18
RCG38.5 / RCGL38.5	RCGI38.5 / RCGLI38.5	38.5"	318, SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300
RCG42.5 / RCGL42.5	RCGI42.5 / RCGLI42.5	42.5"	SIS-20, ALX360, SB-SBRM36

NON-VENTED FOR RTA, RB & RD SERIES



- 16 gauge galvanized or painted steel construction
- RC are insulated, painted, with 3" flanges and damper shelf
- RCG are non-insulated, galvanized, with 1 3/4" flanges
- RCGI are insulated, galvanized, with 1 3/4" flanges
- All are 10 1/4" high
- Shipped fully assembled

ROOF CURBS FOR RTA, RB & RD SERIES (Non-vented) 10 1/4" High				
Part # Painted	Part # Galv (Non-Insulated)	Part # Galv (Insulated)	Curb OD Dimension sq	Curb fits Models
RC18	RCG21.625	RCGI21.625	21.6"	RTA18
RC24	RCG29.125	RCGI29.125	29.1"	RTA-RB-RD24
RC30	RCG35.125	RCGI35.125	35.1"	RTA-RB-RD30
RC36	RCG41.125	RCGI41.125	41.1"	RTA-RB-RD36
RC42	RCG47.125	RCGI47.125	47.1"	RTA-RB-RD42-RTASH
RC48	RCG53.125	RCGI53.125	53.1"	RTA-RB-RD48-RTASH
RC54	RCG59.125	RCGI59.125	59.1"	RTA-RB54-RTASH
RC60	RCG67.125	RCGI67.125	67.1"	RTA-RB60

VENTED FOR ALX, SB-SBRM & SD-SDUB SERIES



RCGV ROOF CURB

- UL762 requires vents and minimum 40" from roof to outlet
- Curb height varies to meet UL762 (see table)
- RCGV are 18" high, RCGVL are 12" high
- RCGVH vary to meet UL762
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Non-insulated & shipped fully assembled

Part #	Part #	UL762 Curb Height	Curb OD Dimension sq	Curb Fits Models
Vented 18" high (RCGV) Vented 12" high (RCGVL)	To Meet UL762			
RCGV17.5 / RCGVL17.5	RCGVH17.5	27"	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCGV19.5 / RCGVL19.5	RCGVH19.5	25"	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, HRE-13, ALX105-C2, ALX105-C2
RCGV23.25 / RCGVL23.25	RCGV23.25	18"	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, HRE-16, ALX135-C2, ALX150-C2, ALX180-C2
RCGV26.5 / RCGVL26.5	RCGV26.5	18"	26.5"	ALX180, SB-SBRM-18, HRE-20, ALX165-C2
RCGV31.5 / RCGVL31.5	RCGV31.5	18"	31.5"	ALX210, ALX245, SB-SBRM-24, HRE-24
RCGV38.5 / RCGVL38.5	RCGV38.5	18"	38.5"	SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300

Options & Accessories Disconnect Switches



**EL1/3-25A
MOISTURE RESISTANT SWITCH**

Single or Three Phase
Moisture resistant, IP65
25 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**DS1/3-30A
DISCONNECT SWITCH**

Single or Three Phase
Disconnect NEMA 3R (3030D)
30 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**KG1-2P1PH
TOGGLE SWITCH**

Single Phase, Non-reversing,
toggle operation NEMA 1
(2510KG1)
30 Amps, 2 Poles

HP Ratings
120V AC - 2hp
240V AC - 2hp
480V AC - 2hp



**8890-5426-1
TOGGLE SWITCH WITH PILOT LIGHT**

15 Amps, 2 Poles

HP Ratings
120V AC - 0.5hp



**8890-54522-W
TOGGLE SWITCH**

20 Amps, 2 Poles

HP Ratings
120V AC - 1hp
240V AC - 2hp



**8890-MS403
TOGGLE SWITCH**

40 Amps, 3 Poles

HP Ratings
120V AC - 7.5hp
240V AC - 15hp
480V AC - 20hp
600V AC - 40hp



**8890-N13NC
SWITCH ENCLOSURE
WITH LOCKOUT**

NEMA 1 Steel switch