



Upblast Direct Drive Exhausters WITH EC MOTOR

ALX-UD-EC SERIES

Ideal for exhausting air from factories, offices, warehouses or commercial buildings. The ALX series spun aluminum exhaust fan can be used as either a roof top or wall mount exhaust fan.

**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Spun aluminum housing will not rust, chip or peel.
- Non-overloading, aluminum backward inclined wheel.
- For models with PSC motors see ALX-UD.
- All motors are 1 Phase 120/240V operation and can be operated at 50 or 60 Hz.
- All units can be wall or roof mounted.
- Quick release latches for easy motor access.
- EC motors offer true variable speed operation and up to 70% energy savings over PSC motors.
- On-board speed adjustment allows simple setup and balancing with LED display.
- Can be controlled remotely up to 50' using a remote mount potentiometer or 0-10V.

DISCONNECT SWITCHES

Disconnect switches are available. See Controls & Thermostats section for details.

OPTIONS & ACCESSORIES


- Wall mount bracket (for all sizes up to 24")
- Grease collection box (required for UL705 Power Ventilator for Restaurant Exhaust Appliances)
- Curb hinge
- Disconnect switches
- MC series solid state variable speed controls (ALX105-120 models)
- Roof Curbs
- Other base (curb cap) options available. See C2 in dimensions table.

OPTIONS FOR NON-RESTAURANT APPLICATIONS:

- Motorized damper
- Gravity (automatic) damper
- Bird screen

DIMENSIONS

MODEL	DIMENSIONS (INCHES)										WEIGHT (lbs)
	A	B	C	C2	D	E	F	G Ø	Wheel Diameter	Roof Opening	
ALX105-UD-EC	20.00	25.00	19.00	21.00	13.00	1.50	3.50	0.38	10.50	15.00	35
ALX120-UD-EC	21.00	25.00	19.00	21.00	13.00	1.50	3.50	0.38	12.25	15.00	37
ALX135-UD-EC	24.25	32.13	21.00	24.75	17.13	2.00	3.75	0.44	13.50	17.00	53
ALX150-UD-EC	24.25	32.13	21.00	24.75	17.13	2.00	3.75	0.44	15.00	17.00	58
ALX165-UD-EC	27.13	37.50	24.75	28.00	21.13	2.00	4.00	0.44	16.50	20.75	100
ALX180-UD-EC	31.75	37.50	28.00	24.75	21.13	2.00	4.00	0.44	18.25	20.75	116
ALX210-UD-EC	37.50	43.75	33.13	40.00	25.50	2.50	4.00	0.44	21.00	29.00	178



ALX-UD-EC SERIES

Upblast Direct Drive Exhausters WITH EC MOTOR


PERFORMANCE SPECIFICATIONS

UNIT	MOTOR			AIRFLOW (CFM) @ STATIC PRESSURE															
	HP	Variable Speed	Max RPM	0" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/4" SP		1-1/2" SP		2"	
				High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
ALX105-UD033EC	1/3	Y	1800	975	217	915	319	855	393	783	440	685	483	-	-	-	-	-	-
ALX120-UD050EC	1/2	Y	1800	1531	325	1437	336	1338	367	1224	395	1093	408	853	438	-	-	-	-
ALX135-UD033EC	1/3	Y	1500	1535	400	1394	450	1225	600	1051	700	815	650	-	-	-	-	-	-
ALX135-UD050EC	1/2	Y	1550	1797	400	1681	450	1475	600	1369	700	1202	850	998	1000	-	-	-	-
ALX135-UD075EC	3/4	Y	1750	2063	400	1967	450	1848	600	1714	700	1571	850	1425	1000	1239	1100	-	-
ALX150-UD033EC	1/3	Y	1150	1883	600	1712	579	1462	663	1166	767	-	-	-	-	-	-	-	-
ALX150-UD050EC	1/2	Y	1325	2186	581	2039	688	1839	680	1606	733	1327	823	1017	765	-	-	-	-
ALX150-UD075EC	3/4	Y	1550	2508	696	2371	711	2222	733	2028	674	1814	827	1588	940	1329	980	-	-
ALX165-UD050EC	1/2	Y	1200	2269	861	2087	800	1835	921	1540	1068	1169	1155	-	-	-	-	-	-
ALX165-UD075EC	3/4	Y	1350	2632	861	2447	800	2232	921	1990	1068	1727	1155	1407	1318	942	816	-	-

MODEL	MOTOR			Airflow (CFM) @ Static Pressure																			
	HP	Variable Speed	Max RPM	0" SP				1/2" SP				1" SP				1-1/4" SP				1-3/4" SP			
				CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
ALX150-UD100EC	1	Y	1620	2681	0.88	0.45	0.79	2447	0.93	0.79	0.83	2128	0.96	1.01	0.86	1939	0.97	1.08	0.87	1513	0.95	1.12	0.87
ALX165-UD100EC	1	Y	1500	2853	0.93	0.44	0.83	2563	0.99	0.77	0.88	2133	0.98	0.99	0.87	1885	0.99	1.03	0.88	1341	0.97	1.02	0.87
ALX180-UD100EC	1	Y	1200	3340	0.83	0.56	0.75	2937	0.89	0.95	0.80	2311	0.92	1.12	0.82	1896	0.91	1.12	0.82	-	-	-	-
ALX210-UD100EC	1	Y	900	4183	0.91	0.61	0.82	3563	0.93	1.07	0.83	2497	0.87	1.26	0.78	-	-	-	-	-	-	-	-

EC motors can be controlled using the built in potentiometer on motor or by using a 0 to 10 V controller, or by a remote potentiometer.
Minimum motor speed 425 RPM (EC Models)

ALX UPBLAST SERIES AIRFLOW RANGE WITH EC MOTORS

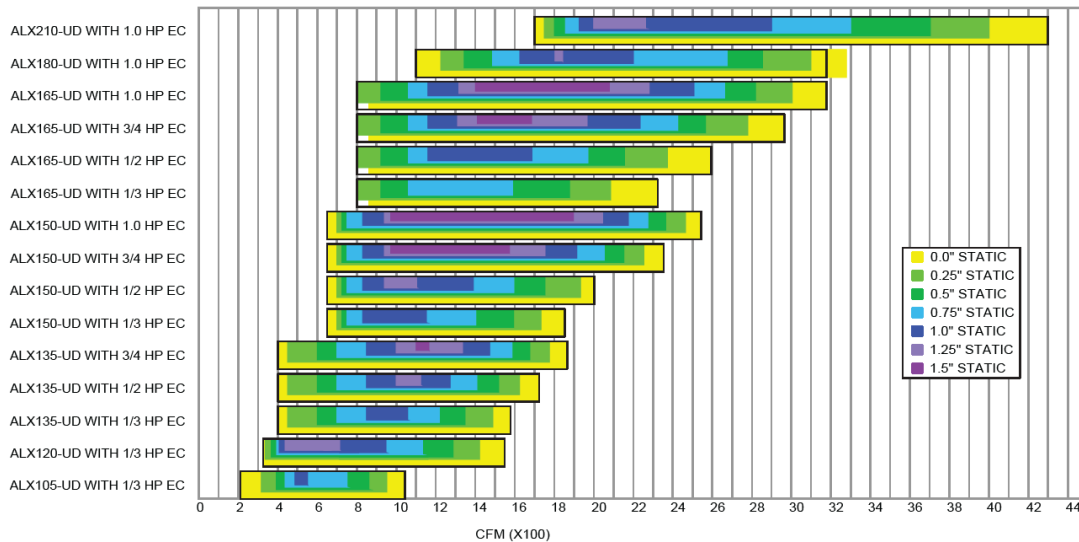

SCAN TO
VIEW FEI
CHARTS



SCAN TO USE
FAN SOFTWARE



UL705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances certified
Refer to our UL705 Supplement SC catalogue page in Roof Mount Ventilation for all installation requirements.



Canarm certifies that the ALX-UD-EC Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 & 311 and comply with the requirements of the AMCA Certified Ratings Programme.
The AMCA certified ratings seal applies to air and sound performance only. The ALX-UD-EC Series shown herein are not approved by AMCA for FEI ratings. May 2026

Options & Accessories Roof Curbs

NON-VENTED FOR 300, 700, SIS, ALX, SB-SBRM & SD-SDUB SERIES




RCG ROOF CURB

- RCG are 18" high, RCGL are 12" high
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Insulated curbs available (RCGI or RCGLI)
- Shipped fully assembled

Please note Galvanized Curbs (RCG's) are for UL705 only.
For UL762 the curb must be vented and be a minimum of 40" from roof to outlet - use RCGV curbs (below)

Part # (Non-Insulated)	Part # (Insulated)	Curb OD Dimension sq	Curb fits Models
RCG17.5 / RCGL17.5	RCGI17.5 / RCGLI17.5	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCG18.5 / RCGL18.5	RCGI18.5 / RCGLI18.5	18.5"	307
RCG19.5 / RCGL19.5	RCGI19.5 / RCGLI19.5	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, ALX105-C2, ALX120-C2
RCG22.5 / RCGL22.5	RCGI22.5 / RCGLI22.5	22.5"	309,709,SIS-09
RCG23.25 / RCGL23.25	RCGI23.25 / RCGLI23.25	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, ALX135-C2, ALX150-C2, ALX180-C2
RCG26.5 / RCGL26.5	RCGI26.5 / RCGLI26.5	26.5"	ALX180, SIS-10, SB-SBRM-18, ALX165-C2
RCG30.5 / RCGL30.5	RCGI30.5 / RCGLI30.5	30.5"	312,712,715, SIS-12, SIG-12, SIG-15
RCG31.5 / RCGL31.5	RCGI31.5 / RCGLI31.5	31.5"	ALX210, ALX245, SB-SBRM-24
RCG34.5 / RCGL34.5	RCGI34.5 / RCGLI34.5	34.5"	315,718,SIS-15,SIS-18
RCG38.5 / RCGL38.5	RCGI38.5 / RCGLI38.5	38.5"	318, SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300
RCG42.5 / RCGL42.5	RCGI42.5 / RCGLI42.5	42.5"	SIS-20, ALX360, SB-SBRM36

NON-VENTED FOR RTA, RB & RD SERIES



- 16 gauge galvanized or painted steel construction
- RC are insulated, painted, with 3" flanges and damper shelf
- RCG are non-insulated, galvanized, with 1 3/4" flanges
- RCGI are insulated, galvanized, with 1 3/4" flanges
- All are 10 1/4" high
- Shipped fully assembled

ROOF CURBS FOR RTA, RB & RD SERIES (Non-vented) 10 1/4" High				
Part # Painted	Part # Galv (Non-Insulated)	Part # Galv (Insulated)	Curb OD Dimension sq	Curb fits Models
RC18	RCG21.625	RCGI21.625	21.6"	RTA18
RC24	RCG29.125	RCGI29.125	29.1"	RTA-RB-RD24
RC30	RCG35.125	RCGI35.125	35.1"	RTA-RB-RD30
RC36	RCG41.125	RCGI41.125	41.1"	RTA-RB-RD36
RC42	RCG47.125	RCGI47.125	47.1"	RTA-RB-RD42-RTASH
RC48	RCG53.125	RCGI53.125	53.1"	RTA-RB-RD48-RTASH
RC54	RCG59.125	RCGI59.125	59.1"	RTA-RB54-RTASH
RC60	RCG67.125	RCGI67.125	67.1"	RTA-RB60

VENTED FOR ALX, SB-SBRM & SD-SDUB SERIES



RCGV ROOF CURB

- UL762 requires vents and minimum 40" from roof to outlet
- Curb height varies to meet UL762 (see table)
- RCGV are 18" high, RCGVL are 12" high
- RCGVH vary to meet UL762
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Non-insulated & shipped fully assembled

Part #	Part #	UL762 Curb Height	Curb OD Dimension sq	Curb Fits Models
Vented 18" high (RCGV) Vented 12" high (RCGVL)	To Meet UL762			
RCGV17.5 / RCGVL17.5	RCGVH17.5	27"	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCGV19.5 / RCGVL19.5	RCGVH19.5	25"	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, HRE-13, ALX105-C2, ALX105-C2
RCGV23.25 / RCGVL23.25	RCGV23.25	18"	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, HRE-16, ALX135-C2, ALX150-C2, ALX180-C2
RCGV26.5 / RCGVL26.5	RCGV26.5	18"	26.5"	ALX180, SB-SBRM-18, HRE-20, ALX165-C2
RCGV31.5 / RCGVL31.5	RCGV31.5	18"	31.5"	ALX210, ALX245, SB-SBRM-24, HRE-24
RCGV38.5 / RCGVL38.5	RCGV38.5	18"	38.5"	SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300

Options & Accessories Disconnect Switches



**EL1/3-25A
MOISTURE RESISTANT SWITCH**

Single or Three Phase
Moisture resistant, IP65
25 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**DS1/3-30A
DISCONNECT SWITCH**

Single or Three Phase
Disconnect NEMA 3R (3030D)
30 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**KG1-2P1PH
TOGGLE SWITCH**

Single Phase, Non-reversing,
toggle operation NEMA 1
(2510KG1)
30 Amps, 2 Poles

HP Ratings
120V AC - 2hp
240V AC - 2hp
480V AC - 2hp



**8890-5426-1
TOGGLE SWITCH WITH PILOT LIGHT**

15 Amps, 2 Poles

HP Ratings
120V AC - 0.5hp



**8890-54522-W
TOGGLE SWITCH**

20 Amps, 2 Poles

HP Ratings
120V AC - 1hp
240V AC - 2hp



**8890-MS403
TOGGLE SWITCH**

40 Amps, 3 Poles

HP Ratings
120V AC - 7.5hp
240V AC - 15hp
480V AC - 20hp
600V AC - 40hp



**8890-N13NC
SWITCH ENCLOSURE
WITH LOCKOUT**

NEMA 1 Steel switch



WHAT IS UL705 SUPPLEMENT SC?

Power Ventilation for Restaurant Exhaust Appliances

Power ventilators for restaurant exhaust appliances covered by these requirements are intended for installation in accordance with the Standard of the National Fire Protection Association for the Installation of Equipment for the Removal of Smoke and Grease-Laden Vapors from Commercial Cooking Equipment, NFPA 96.

Power ventilators for restaurant appliances shall comply with the Standard for Power Ventilators, UL 705 - Power Ventilator for Restaurant Exhaust Appliances, modified in that wiring system shall not be located in the path of travel of exhaust products.

REQUIREMENTS

REQUIREMENT	ALX SERIES		BI-RM		HRE	
	STANDARD	ACCESSORY	STANDARD	ACCESSORY	STANDARD	ACCESSORY
Designed for removal of smoke and/or grease laden air	•		•		•	
Air temperatures up to 300°F	•		•		•	
Access for cleanout	•		•		•	
Grease drain	•		•		•	
Grease collection box		•		•		•
Minimum 500 FPM airflow in duct**	•		•		•	
Vented roof curb extending discharge minimum 40" above roofline		•	N/A*			•
Curb hinge		•	N/A			•


* must be mounted to extend outlet minimum 40" above roofline

** based on standard Canarm configurations with Motors and Drives, LMLD models must refer to Delair for minimum rPM to reach 500 FPM


UL705 SUPPLEMENT SC LISTED PRODUCTS



ALX SERIES
(upblast models only)



BI-RM SERIES



HRE SERIES