

Utility Blowers Restaurant Model

BI-RM SERIES

Designed for restaurant exhaust applications.




AVAILABLE WITH MOTORS & DRIVES Factory installed.
Consult Delair Software for details

FEATURES

- Complete range of sizes from 10" to 36".
- Full AMCA Class 1 Operation.
- Non-overloading backward inclined (BI) welded wheels.
- Aluminum wheel - (AMCA type B classification for spark resistant construction) - available as an option.
- Aluminum wheels only on BI-RM-30 to BI-RM-36.
- Discharge position can be field rotated to any of 8 discharge positions.
- Counter clock wise rotation is standard. Clock wise available.
- Outlet flanges on models BI-24 to BI-36.
- Temperature Ratings - without a heat slinger 250° F with a heat slinger, steel wheel 400° F, aluminum wheel 300° F.
- Motor access from 3 sides.
- Sloped motor base for ease of motor installation.
- Vented motor and drive compartment cover, with handles, for safety & weather protection.
- 16 gauge or heavier blower housing.
- Heavy duty pillow block ball bearings.
- UL 705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances Listed for removal of cooking vapours.
- Meets NFPA 96 guidelines.
- Integral handles for single person removal of motor and drive compartment cover.
- Upblast discharge directs exhaust away from roof.
- Continuously welded 16 gauge or heavier blower housing.
- Bolted clean out door.
- 2" drain for easy removal of cleaning solutions.
- Vinyl shaft seal.

RELATED MODEL



BI
Standard belt drive
utility blower



SIMPLE TO REMOVE COVER AND MULTIPLE SIDE ACCESS PROVIDE EASY MAINTENANCE.

ACCESSORIES


- V-Cap
- Bolted Clean Out Door
 - Heat Slinger
- Vibration Isolators
- Shaft Seal
- Corrosion Resistant Coating
 - Aluminum Wheel
 - Back Draft Dampers
- Inlet & Outlet Screens
 - 2" Drain Fitting



BI-RM SERIES

Belt Drive Utility Blowers - Restaurant Model

DIMENSIONS

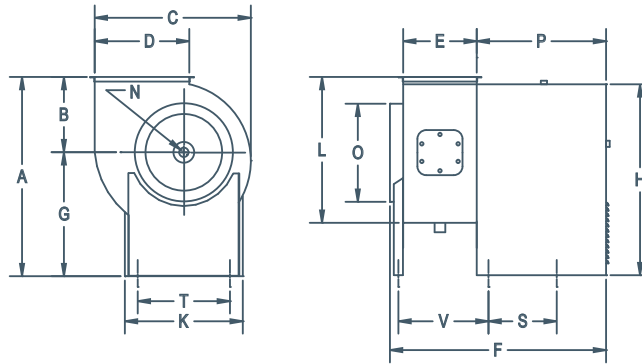

MODELS BI-RM(-HS)-10 TO BI-RM(-HS)-24
(UL 762 LISTED FOR REMOVAL OF COOKING VAPOURS)

MODEL	A (STANDARD MODELS)	A (BI-RM MODELS)	B	C	D	E	F	G	H	K (CABINET WIDTH)	L	N	O	P	S	T	V	WEIGHT (lbs) without motors
BI-10	26 3/4"	23 5/8"	8 3/8"	19 3/16"	11 5/16"	8 1/4"	27 3/4" No Leg	15 5/6"	21 5/16"	13 1/4"	17 1/2"	3/4"	11"	17 1/4"	11 5/8"	11 1/4"	-	78
BI-12	33 3/16"	30 3/16"	9 15/16"	27 7/16"	13 1/16"	9 7/8"	33 5/16"	20 3/16"	29 1/8"	16 3/4"	20 9/16"	1"	12 7/16"	21 3/16"	11 1/2"	14 3/4"	13 1/16"	112
BI-13	34 1/2"	30 15/16"	10 3/4"	24 1/2"	14 3/8"	10 3/4"	34 1/4"	20 3/16"	29 1/8"	16 3/4"	22 7/16"	1"	14 3/8"	21 1/4"	11 1/2"	14 3/4"	14"	134
BI-15	35 15/16"	31 15/16"	11 3/4"	27 1/4"	15 13/16"	12 3/4"	36 1/4"	20 3/16"	29 1/8"	16 3/4"	24 7/8"	1"	15 7/8"	21 3/16"	11 1/2"	14 3/4"	16"	140
BI-16	39 7/16"	34 11/16"	12 11/16"	29 15/16"	17 1/2"	13 1/8"	36 5/8"	22"	30 15/16"	16 3/4"	26 15/16"	1 3/16"	17 3/8"	21 1/4"	11 1/2"	14 3/4"	16 1/2"	162
BI-18	41 5/16"	35 7/8"	13 13/16"	33 3/16"	19 3/8"	14 1/2"	38 1/4"	22"	30 15/16"	16 3/4"	29 9/16"	1 3/16"	19 3/8"	21 1/2"	11 1/2"	14 3/4"	17 7/8"	172
BI-20	49 3/16"	42 15/16"	14 15/16"	36 7/16"	21 3/16"	15 3/4"	46 3/8"	28"	40 15/16"	25 1/8"	32 3/16"	1 3/16"	21 1/4"	27 5/8"	14 9/16"	22 3/4"	19 3/4"	289
BI-22	51 9/16"	44 3/8"	16 3/8"	40 7/16"	23 9/16"	17 3/4"	48 7/16"	28"	40 15/16"	25 1/8"	35 9/16"	1 3/16"	23 5/8"	27 5/8"	14 9/16"	22 3/4"	21 13/16"	322
BI-24	58 3/16"	49 15/16"	17 15/16"	44 11/16"	26 1/8"	19 3/8"	51 5/16"	32 1/8"	46 11/16"	28 15/16"	39 1/8"	1 7/16"	26"	28 15/16"	18 5/16"	26 3/8"	23 3/8"	385
BI-27	60 11/16"	51 1/2"	19 1/2"	49"	28 11/16"	21 1/4"	53 1/8"	32 1/8"	46 11/16"	28 15/16"	42 13/16"	1 7/16"	28 5/8"	28 7/8"	18 5/16"	26 3/8"	25 1/4"	411
BI-30	65 15/16"	68 3/16"	24 7/8"	54 1/2"	31 7/8"	23 5/8"	58 5/8"	43 5/16"	65 5/16"	44 5/16"	50 15/16"	1 11/16"	31 3/4"	32"	17"	40"	29"	517
BI-33	68 3/16"	68 5/8"	25 3/8"	58 15/16"	34 7/8"	25 15/16"	60 15/16"	43 5/16"	65 5/16"	44 5/16"	53 7/8"	1 11/16"	35"	32"	17"	40"	31 5/16"	607

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1" SP				2" SP				3" SP				4" SP				5" SP				Min HP	Max HP
	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)		
BI-RM-10	2300	1.92	0.71	1.78	2100	2.00	0.87	1.85	1800	1.88	1.01	1.74	1600	1.96	1.07	1.81	1300	1.95	1.07	1.80	1/2	2
BI-RM-12*	3000	2.27	0.73	2.08	2900	2.69	0.86	2.43	2600	2.66	1.00	2.41	2400	2.79	1.09	2.52	1900	2.56	1.13	2.32	-	3
BI-RM-13	3900	3.00	0.75	2.70	3600	3.12	0.92	2.80	3300	3.26	1.04	2.92	2900	3.20	1.13	2.86	2400	3.01	1.19	2.70	1/2	5
BI-RM-15*	4800	3.68	0.71	3.27	4400	3.77	0.89	3.34	4000	3.90	1.02	3.45	3600	3.98	1.11	3.52	3000	3.77	1.16	3.34	-	5
BI-RM-16	5700	4.26	0.74	3.76	5300	4.48	0.92	3.94	4900	4.70	1.04	4.12	4300	4.66	1.12	4.09	3500	4.38	1.16	3.86	3/4	7 1/2
BI-RM-18	6200	3.88	0.82	3.44	5400	4.11	0.95	3.63	4700	4.18	1.06	3.69	3500	3.71	1.11	3.29	-	-	-	-	3/4	7 1/2
BI-RM-20	8400	5.79	0.80	5.03	7900	5.96	1.02	5.18	7200	6.20	1.14	5.38	6400	6.29	1.22	5.45	5300	6.08	1.24	5.28	1	7 1/2
BI-RM-22*	10000	6.51	0.81	5.63	9100	7.56	0.89	6.51	8200	7.80	1.01	6.70	6900	7.58	1.07	6.52	-	-	-	-	-	10
BI-RM-24	11200	6.48	0.86	5.61	10100	6.85	1.05	5.92	8800	6.99	1.17	6.03	6700	6.43	1.19	5.57	-	-	-	-	1 1/2	15
BI-RM-27	15000	10.03	0.80	8.55	14100	11.01	0.96	9.36	12800	11.39	1.08	9.67	11200	11.39	1.16	9.67	8300	9.97	1.15	8.50	1 1/2	15
BI-RM-30-AW	18700	13.32	0.75	11.30	17400	14.07	0.93	11.90	16100	14.82	1.05	12.50	14200	14.79	1.13	12.50	11900	14.32	1.16	12.10	2	15
BI-RM-33-AW	22600	16.07	0.75	13.50	21000	16.98	0.93	14.30	19400	17.86	1.05	15.00	17100	17.82	1.13	15.00	14300	17.22	1.15	14.50	-	20
BI-RM-36-AW	26886	18.34	0.77	15.40	24964	19.58	0.94	16.40	22900	20.54	1.06	17.20	19836	20.20	1.14	16.90	15695	18.93	1.14	15.90	3	25

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).

*Special Order



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE



UL705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances certified, refer to our UL705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances Catalogue page C in Roof Mount Ventilation for all installation requirements



Canarm certifies that the BI-RM Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air performance only. The BI-RM Series shown herein are not approved by AMCA for FEI ratings. May 2026

Options & Accessories



BACKDRAFT DAMPERS

- Fits the outlet of all 200, 400, 600, 9200 and BI Series Utility Blowers.
- Constructed of 16 ga. aluminum.
- Gravity activated.
- Easily field installed.



INLET SCREENS

- Fits all single outlet 400, 600 and BI Series Utility Blowers.
- Round inlet screens mount on the inlet collars of the blowers.
- Easily field installed.




OUTLET SCREENS

- Fits all single inlet 400, 600 and BI Series Utility Blowers.
- Rectangular outlet screens mount over the square outlet of the units.
- Easily field installed.



BOLTED CLEAN OUT DOOR

- Allows easy access for inspection and cleaning of the wheel & housing.
- A tight pattern of bolts holds the gasketed door in place on the curved face of the scroll shaped wheel housing.



V CAP

- For BI upblast utility sets to reduce rain and snow entry.
- Easily field installed above the blower outlet.



HEAT SLINGER

- Cast aluminum disk with radial blades, split for easy field installation on the shaft between the housing and the inboard bearing.
- Can be used on Canarm BI/600 units.
- Provides protection for the bearing from excessive heat. The slinger dissipates heat from the shaft before reaching the bearing and increases the air flow across the inboard bearings.
- Good for a maximum of 400° Fahrenheit air stream temperature.



SHAFT SEAL

- Good for a maximum of 220° Fahrenheit.
- Prevents migration of fumes, grease vapors, dust etc from the airstream into the compartment housing motors, drives and bearings.
- Can be used on Canarm's BI/600 Utility units.
- Easily field installed.
- Installed on the shaft between the bearing plate and back panel in the motor compartment.
- Constructed of 1/4" thick polyethylene for a good seal and resistance to many substances.



DRAIN FITTING

- Large, 2" diameter threaded pipe fitting resists clogging.
- Can be connected to a drainage system if desired.
- Factory welded in place, prior to painting.
- Also available separately.




VIBRATION ISOLATORS RUBBER

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.




VIBRATION ISOLATORS SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor use only.



VIBRATION ISOLATORS OUTDOOR SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Designed for outdoor use. Housed to resist lateral motion from winds.



ALUMINUM WHEEL

- For use with the BI & BI-RM series units.
- AMCA type B classification for spark resistant construction



WHAT IS UL705 SUPPLEMENT SC?

Power Ventilation for Restaurant Exhaust Appliances

Power ventilators for restaurant exhaust appliances covered by these requirements are intended for installation in accordance with the Standard of the National Fire Protection Association for the Installation of Equipment for the Removal of Smoke and Grease-Laden Vapors from Commercial Cooking Equipment, NFPA 96.

Power ventilators for restaurant appliances shall comply with the Standard for Power Ventilators, UL 705 - Power Ventilator for Restaurant Exhaust Appliances, modified in that wiring system shall not be located in the path of travel of exhaust products.

REQUIREMENTS

REQUIREMENT	ALX SERIES		BI-RM		HRE	
	STANDARD	ACCESSORY	STANDARD	ACCESSORY	STANDARD	ACCESSORY
Designed for removal of smoke and/or grease laden air	•		•		•	
Air temperatures up to 300°F	•		•		•	
Access for cleanout	•		•		•	
Grease drain	•		•		•	
Grease collection box		•		•		•
Minimum 500 FPM airflow in duct**	•		•		•	
Vented roof curb extending discharge minimum 40" above roofline		•	N/A*			•
Curb hinge		•	N/A			•


* must be mounted to extend outlet minimum 40" above roofline

** based on standard Canarm configurations with Motors and Drives, LMLD models must refer to Delair for minimum rPM to reach 500 FPM


UL705 SUPPLEMENT SC LISTED PRODUCTS



ALX SERIES
(upblast models only)



BI-RM SERIES



HRE SERIES