


# Horizontal Restaurant Exhauster

## HRE SERIES

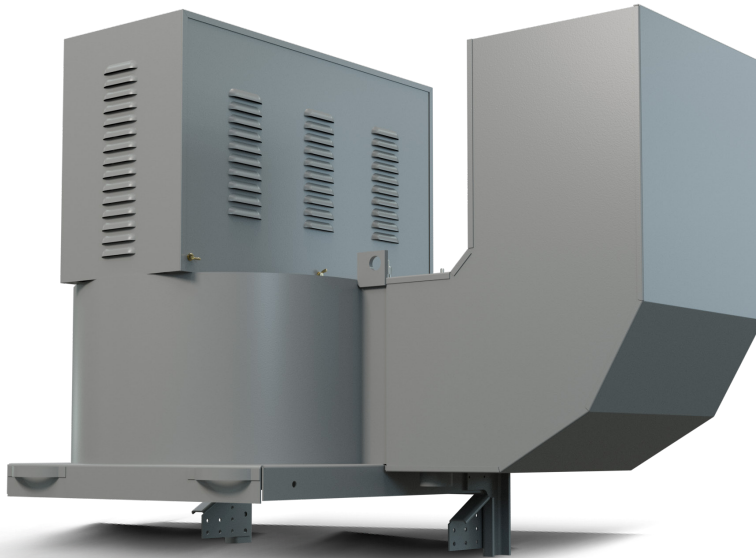

### FEATURES


- UL705 Supplement SC Listed for the removal of cooking vapors
- Meets NFPA-96 Installation guidelines
- Convenient hinged curb mounting
- Clean-out access door
- Fully welded, 16 gauge or heavier blower housing c/w shaft seal to eliminate grease leakage
- 2 inch drain connection
- Pillow block ball bearings
- Upblast discharge directs exhaust away from roof
- Heavy duty, backward inclined non-overloading wheel

### ACCESSORIES


- Vented roof curbs comes with hinge
- Discharge "V" cap (rain cap)




**AVAILABLE WITH MOTORS & DRIVES** Factory installed.  
Consult Delair Software for details



UNIT WITH COVER REMOVED

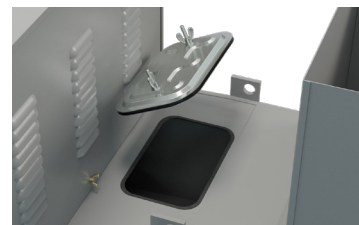

CONVENIENT CLEAN OUT  
ACCESS DOOR

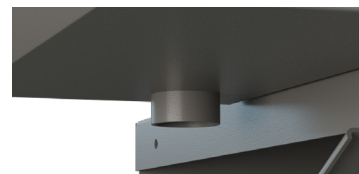

2" DRAIN CONNECTION




## HRE SERIES


# Horizontal Restaurant Exhauster

## DIMENSIONS

TOP VIEW

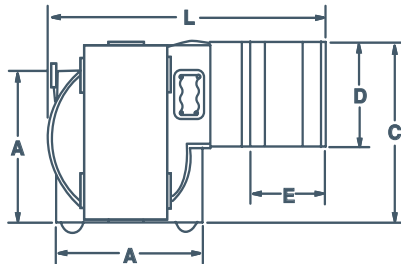

SIDE VIEW

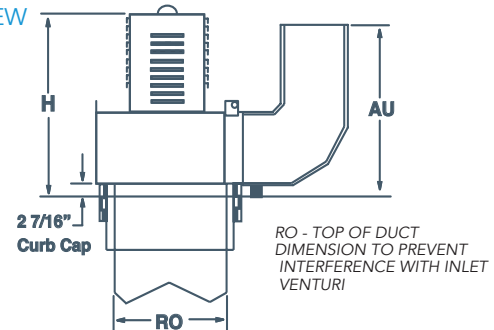

| MODEL  | A       | CURB (SQUARE) | AU       | C       | D        | E       | H         | L         | RO       | SHAFT DIAMETER | UNIT WEIGHT (LBS)<br>(without motors & drives) |
|--------|---------|---------------|----------|---------|----------|---------|-----------|-----------|----------|----------------|------------------------------------------------|
| HRE-13 | 21 1/2" | 20 1/2"       | 27 7/16" | 25 1/4" | 14 3/4"  | 10 5/8" | 30 15/16" | 41 7/8"   | 17 1/2"  | 1"             | 147                                            |
| HRE-16 | 25 1/2" | 24 1/2"       | 31 1/2"  | 30 3/8" | 17 7/8"  | 13 1/4" | 34 1/4"   | 48 11/16" | 21 5/16" | 1 3/16"        | 204                                            |
| HRE-20 | 29 1/2" | 28 1/2"       | 35 7/8"  | 36 1/8" | 21 9/16" | 15 5/8" | 40 1/16"  | 56 1/8"   | 25 1/2"  | 1 3/16"        | 251                                            |
| HRE-24 | 34 1/2" | 33 3/8"       | 40 5/8"  | 43 3/8" | 26 5/16" | 19 1/2" | 43 5/8"   | 66 7/8"   | 30 1/8"  | 1 7/16"        | 362                                            |

## PERFORMANCE SPECIFICATIONS

### TYPICAL MAXIMUM CFM @ SP

| MODEL  | 1" SP |      |      |             | 2" SP |      |      |             | 3" SP |      |      |             | 4" SP |      |      |             | 5" SP |      |      |             | Min HP | Max HP |
|--------|-------|------|------|-------------|-------|------|------|-------------|-------|------|------|-------------|-------|------|------|-------------|-------|------|------|-------------|--------|--------|
|        | CFM   | BHP  | FEI  | FEPact (kW) | CFM   | BHP  | FEI  | FEPact (kW) | CFM   | BHP  | FEI  | FEPact (kW) | CFM   | BHP  | FEI  | FEPact (kW) | CFM   | BHP  | FEI  | FEPact (kW) |        |        |
| HRE-13 | 2875  | 1.90 | 0.74 | 1.76        | 2449  | 1.91 | 0.92 | 1.77        | 2070  | 1.91 | 1.05 | 1.77        | 1706  | 1.94 | 1.09 | 1.80        | 1319  | 1.97 | 1.04 | 1.82        | 1/2    | 2      |
| HRE-16 | 4160  | 2.83 | 0.69 | 2.55        | 3427  | 2.96 | 0.80 | 2.66        | 2712  | 2.92 | 0.87 | 2.63        | 2020  | 2.93 | 0.84 | 2.64        | 1404  | 2.99 | 0.74 | 2.69        | 3/4    | 3      |
| HRE-20 | 6842  | 4.83 | 0.69 | 4.23        | 5993  | 4.80 | 0.88 | 4.21        | 5178  | 4.85 | 0.99 | 4.25        | 4275  | 4.94 | 1.01 | 4.32        | 3274  | 4.99 | 0.93 | 4.37        | 1      | 5      |
| HRE-24 | 10697 | 7.45 | 0.80 | 6.41        | 9578  | 7.45 | 0.98 | 6.41        | 8371  | 7.34 | 1.10 | 6.32        | 6942  | 7.36 | 1.11 | 6.34        | 5602  | 7.49 | 1.05 | 6.45        | 1 1/2  | 7 1/2  |

CFM values listed are summarized for convenience. For full performance data refer to our Delair program.

Power rating (BHP) does not include motor or transmission losses. Performance is based on a Figure 15, A-type installation (free inlet and free outlet) including the recommended Canarm roof curb. Performance ratings do not include the effects of appurtenances (accessories).



SCAN TO  
VIEW FEI  
CHARTS



SCAN TO  
USE DELAIR  
SOFTWARE



UL705 Supplement SC - Power Ventilator for Restaurant Exhaust  
Appliances certified  
Refer to our UL705 Supplement SC catalogue page in Roof Mount  
Ventilation for all installation requirements.

# Options & Accessories Roof Curbs

## NON-VENTED FOR 300, 700, SIS, ALX, SB-SBRM & SD-SDUB SERIES




RCG ROOF CURB

- RCG are 18" high, RCGL are 12" high
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Insulated curbs available (RCGI or RCGLI)
- Shipped fully assembled

Please note Galvanized Curbs (RCG's) are for UL705 only.  
For UL762 the curb must be vented and be a minimum of 40" from roof to outlet - use RCGV curbs (below)

| Part # (Non-Insulated) | Part # (Insulated)     | Curb OD Dimension sq | Curb fits Models                                                                     |
|------------------------|------------------------|----------------------|--------------------------------------------------------------------------------------|
| RCG17.5 / RCGL17.5     | RCGI17.5 / RCGLI17.5   | 17.5"                | ALX105, ALX120, SD-SDUB-10, SD-SDUB-12                                               |
| RCG18.5 / RCGL18.5     | RCGI18.5 / RCGLI18.5   | 18.5"                | 307                                                                                  |
| RCG19.5 / RCGL19.5     | RCGI19.5 / RCGLI19.5   | 19.5"                | ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, ALX105-C2, ALX120-C2 |
| RCG22.5 / RCGL22.5     | RCGI22.5 / RCGLI22.5   | 22.5"                | 309,709,SIS-09                                                                       |
| RCG23.25 / RCGL23.25   | RCGI23.25 / RCGLI23.25 | 23.25"               | ALX165, SB-SBRM-15, SD-SDUB-85, ALX135-C2, ALX150-C2, ALX180-C2                      |
| RCG26.5 / RCGL26.5     | RCGI26.5 / RCGLI26.5   | 26.5"                | ALX180, SIS-10, SB-SBRM-18, ALX165-C2                                                |
| RCG30.5 / RCGL30.5     | RCGI30.5 / RCGLI30.5   | 30.5"                | 312,712,715, SIS-12, SIG-12, SIG-15                                                  |
| RCG31.5 / RCGL31.5     | RCGI31.5 / RCGLI31.5   | 31.5"                | ALX210, ALX245, SB-SBRM-24                                                           |
| RCG34.5 / RCGL34.5     | RCGI34.5 / RCGLI34.5   | 34.5"                | 315,718,SIS-15,SIS-18                                                                |
| RCG38.5 / RCGL38.5     | RCGI38.5 / RCGLI38.5   | 38.5"                | 318, SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300                                        |
| RCG42.5 / RCGL42.5     | RCGI42.5 / RCGLI42.5   | 42.5"                | SIS-20, ALX360, SB-SBRM36                                                            |

## NON-VENTED FOR RTA, RB & RD SERIES



- 16 gauge galvanized or painted steel construction
- RC are insulated, painted, with 3" flanges and damper shelf
- RCG are non-insulated, galvanized, with 1 3/4" flanges
- RCGI are insulated, galvanized, with 1 3/4" flanges
- All are 10 1/4" high
- Shipped fully assembled

| ROOF CURBS FOR RTA, RB & RD SERIES (Non-vented) 10 1/4" High |                             |                         |                      |                   |
|--------------------------------------------------------------|-----------------------------|-------------------------|----------------------|-------------------|
| Part # Painted                                               | Part # Galv (Non-Insulated) | Part # Galv (Insulated) | Curb OD Dimension sq | Curb fits Models  |
| RC18                                                         | RCG21.625                   | RCGI21.625              | 21.6"                | RTA18             |
| RC24                                                         | RCG29.125                   | RCGI29.125              | 29.1"                | RTA-RB-RD24       |
| RC30                                                         | RCG35.125                   | RCGI35.125              | 35.1"                | RTA-RB-RD30       |
| RC36                                                         | RCG41.125                   | RCGI41.125              | 41.1"                | RTA-RB-RD36       |
| RC42                                                         | RCG47.125                   | RCGI47.125              | 47.1"                | RTA-RB-RD42-RTASH |
| RC48                                                         | RCG53.125                   | RCGI53.125              | 53.1"                | RTA-RB-RD48-RTASH |
| RC54                                                         | RCG59.125                   | RCGI59.125              | 59.1"                | RTA-RB54-RTASH    |
| RC60                                                         | RCG67.125                   | RCGI67.125              | 67.1"                | RTA-RB60          |

## VENTED FOR ALX, SB-SBRM & SD-SDUB SERIES



RCGV ROOF CURB

- UL762 requires vents and minimum 40" from roof to outlet
- Curb height varies to meet UL762 (see table)
- RCGV are 18" high, RCGVL are 12" high
- RCGVH vary to meet UL762
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Non-insulated & shipped fully assembled

| Part #                                            | Part #        | UL762 Curb Height | Curb OD Dimension sq | Curb Fits Models                                                                             |
|---------------------------------------------------|---------------|-------------------|----------------------|----------------------------------------------------------------------------------------------|
| Vented 18" high (RCGV)<br>Vented 12" high (RCGVL) | To Meet UL762 |                   |                      |                                                                                              |
| RCGV17.5 / RCGVL17.5                              | RCGVH17.5     | 27"               | 17.5"                | ALX105, ALX120, SD-SDUB-10, SD-SDUB-12                                                       |
| RCGV19.5 / RCGVL19.5                              | RCGVH19.5     | 25"               | 19.5"                | ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, HRE-13, ALX105-C2, ALX105-C2 |
| RCGV23.25 / RCGVL23.25                            | RCGV23.25     | 18"               | 23.25"               | ALX165, SB-SBRM-15, SD-SDUB-85, HRE-16, ALX135-C2, ALX150-C2, ALX180-C2                      |
| RCGV26.5 / RCGVL26.5                              | RCGV26.5      | 18"               | 26.5"                | ALX180, SB-SBRM-18, HRE-20, ALX165-C2                                                        |
| RCGV31.5 / RCGVL31.5                              | RCGV31.5      | 18"               | 31.5"                | ALX210, ALX245, SB-SBRM-24, HRE-24                                                           |
| RCGV38.5 / RCGVL38.5                              | RCGV38.5      | 18"               | 38.5"                | SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300                                                     |



## WHAT IS UL705 SUPPLEMENT SC?

# Power Ventilation for Restaurant Exhaust Appliances

Power ventilators for restaurant exhaust appliances covered by these requirements are intended for installation in accordance with the Standard of the National Fire Protection Association for the Installation of Equipment for the Removal of Smoke and Grease-Laden Vapors from Commercial Cooking Equipment, NFPA 96.

Power ventilators for restaurant appliances shall comply with the Standard for Power Ventilators, UL 705 - Power Ventilator for Restaurant Exhaust Appliances, modified in that wiring system shall not be located in the path of travel of exhaust products.

## REQUIREMENTS

| REQUIREMENT                                                     | ALX SERIES |           | BI-RM    |           | HRE      |           |
|-----------------------------------------------------------------|------------|-----------|----------|-----------|----------|-----------|
|                                                                 | STANDARD   | ACCESSORY | STANDARD | ACCESSORY | STANDARD | ACCESSORY |
| Designed for removal of smoke and/or grease laden air           | •          |           | •        |           | •        |           |
| Air temperatures up to 300°F                                    | •          |           | •        |           | •        |           |
| Access for cleanout                                             | •          |           | •        |           | •        |           |
| Grease drain                                                    | •          |           | •        |           | •        |           |
| Grease collection box                                           |            | •         |          | •         |          | •         |
| Minimum 500 FPM airflow in duct**                               | •          |           | •        |           | •        |           |
| Vented roof curb extending discharge minimum 40" above roofline |            | •         | N/A*     |           |          | •         |
| Curb hinge                                                      |            | •         | N/A      |           |          | •         |


\* must be mounted to extend outlet minimum 40" above roofline

\*\* based on standard Canarm configurations with Motors and Drives, LMLD models must refer to Delair for minimum rPM to reach 500 FPM


## UL705 SUPPLEMENT SC LISTED PRODUCTS



**ALX SERIES**  
(upblast models only)



**BI-RM SERIES**



**HRE SERIES**