

Direct Drive Roof Exhausters

RD SERIES

Sturdy constructed direct drive roof exhausters ideal for industrial & commercial applications.



FEATURES


- Heavy duty galvanized blades.
- Galvanized steel wind-band and rain-proof butterfly dampers that rotate easily on brass bushings.
- TEFC, ball bearing motor is in the air stream, within the building, maximum ambient temperature of 40°C (104°F).
- Not recommended for dirty or dust laden applications.

DISCONNECT SWITCHES

- Wire disconnect switches are available.

ACCESSORIES

RC ROOF CURB



- For Canarm Roof Exhaust fans.
- Sturdy powder coated, 16 gauge steel.
 - 3" flanges
 - 1" SM insulation
 - Damper shelf

FAN SIZE	MODEL
18"	RC18
24"	RC24
30"	RC30
36"	RC36
42"	RC42
48"	RC48
54"	RC54
60"	RC60

RD SERIES


Direct Drive Roof Exhausters

PERFORMANCE SPECIFICATIONS

	MODEL	RPM	HP	0" S.P.				1/8" S.P.				1/4" S.P.				3/8" S.P.				Min. CFM	dBA @ 10ft.	
				CFM	BHP	FEI	FEP (kW)	CFM	BHP	FEI	FEP (kW)	CFM	BHP	FEI	FEP (kW)	CFM	BHP	FEI	FEP (kW)			
BLADE DIAMETER	SINGLE PHASE																					
	24"	RD24T10075C	1140	3/4	6549	0.74	-	-	6017	0.78	-	-	5527	0.83	-	-	-	-	-	-	4700	73
		RD24T10100B	1725	1	5843	0.71	0.99	0.65	5324	0.75	1.11	0.68	4854	0.80	1.17	0.72	4213	0.85	1.15	0.77	4700	84
	30"	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
		RD30T10500B	1725	5	14553	3.78	0.46	3.15	14011	3.89	0.56	3.24	13354	4.01	0.64	3.34	12558	4.04	0.70	3.36	7300	90
	THREE PHASE																					
	24"	RD24T30075C*	1140	3/4	6549	0.74	-	-	6017	0.78	-	-	5527	0.83	-	-	-	-	-	-	4700	73
		RD24T30100B*	1725	1	5843	0.71	1.02	0.63	5324	0.75	1.15	0.66	4854	0.80	1.21	0.70	4213	0.85	1.19	0.74	4700	84
	30"	RD30T30150C*	1140	1 1/2	9402	1.22	0.95	1.05	8542	1.29	1.06	1.10	6945	1.27	1.09	1.09	6129	1.38	1.05	1.18	79	
		RD30T30500B*	1725	5	14553	3.78	0.47	3.13	14011	3.89	0.56	3.22	13354	4.01	0.64	3.32	12558	4.04	0.71	3.35	90	
	36"	RD36T30200D*	860	2	13604	1.61	0.91	1.48	11909	1.66	1.01	1.53	10082	1.72	1.03	1.58	8991	1.90	0.99	1.74	10000	80
		RD36T30500C*	1140	5	18126	3.79	0.55	3.15	16925	3.87	0.66	3.21	15431	3.90	0.74	3.24	13982	3.94	0.79	3.27	10000	88
	42"	RD42T30500C*	1140	5	21704	3.13	0.79	2.61	20742	3.28	0.94	2.73	19510	3.47	1.03	2.89	18192	3.69	1.07	3.07	14000	85
		RD42T30750C*	1140	7 1/2	32476	7.70	-	-	31490	7.70	-	-	30518	7.76	-	-	29586	8.02	-	-	14000	88
	48"	RD48T30750D*	860	7 1/2	35654	5.93	-	-	33411	6.06	-	-	31857	6.34	-	-	30219	6.62	-	-	18000	89
		RD48T30750C*	1140	7 1/2	29216	4.62	0.72	3.79	28169	4.87	0.85	3.98	26784	5.16	0.95	4.22	25291	5.48	1.00	4.47	18000	92

For three phase motors, substitute "*" with "M" for 230/460 volt (If 208V required please specify) or "P" for 575 volt. BHP does not include drive losses. dBA ratings shown are measured at 0" static pressure and should be used as a guideline only.


DIMENSIONS

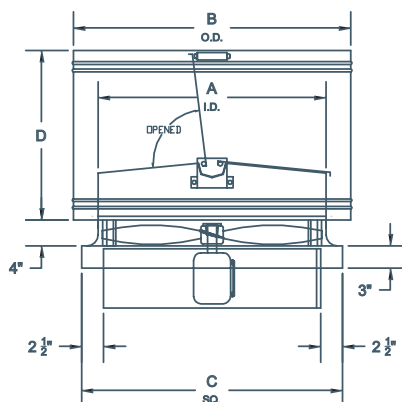

MODEL #	A I.D.	B O.D.	C SQ.	D
RD24	25"	31 1/2"	29 1/2"	19"
RD30	31"	37 1/2"	35 1/2"	22"
RD36	37"	43 1/2"	41 1/2"	25"
RD42	43"	49 1/2"	47 1/2"	27"
RD48	49"	55 1/2"	53 1/2"	30"

Options & Accessories Roof Curbs

NON-VENTED FOR 300, 700, SIS, ALX, SB-SBRM & SD-SDUB SERIES




RCG ROOF CURB

- RCG are 18" high, RCGL are 12" high
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Insulated curbs available (RCGI or RCGLI)
- Shipped fully assembled

Please note Galvanized Curbs (RCG's) are for UL705 only.
For UL762 the curb must be vented and be a minimum of 40" from roof to outlet - use RCGV curbs (below)

Part # (Non-Insulated)	Part # (Insulated)	Curb OD Dimension sq	Curb fits Models
RCG17.5 / RCGL17.5	RCGI17.5 / RCGLI17.5	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCG18.5 / RCGL18.5	RCGI18.5 / RCGLI18.5	18.5"	307
RCG19.5 / RCGL19.5	RCGI19.5 / RCGLI19.5	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, ALX105-C2, ALX120-C2
RCG22.5 / RCGL22.5	RCGI22.5 / RCGLI22.5	22.5"	309,709,SIS-09
RCG23.25 / RCGL23.25	RCGI23.25 / RCGLI23.25	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, ALX135-C2, ALX150-C2, ALX180-C2
RCG26.5 / RCGL26.5	RCGI26.5 / RCGLI26.5	26.5"	ALX180, SIS-10, SB-SBRM-18, ALX165-C2
RCG30.5 / RCGL30.5	RCGI30.5 / RCGLI30.5	30.5"	312,712,715, SIS-12, SIG-12, SIG-15
RCG31.5 / RCGL31.5	RCGI31.5 / RCGLI31.5	31.5"	ALX210, ALX245, SB-SBRM-24
RCG34.5 / RCGL34.5	RCGI34.5 / RCGLI34.5	34.5"	315,718,SIS-15,SIS-18
RCG38.5 / RCGL38.5	RCGI38.5 / RCGLI38.5	38.5"	318, SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300
RCG42.5 / RCGL42.5	RCGI42.5 / RCGLI42.5	42.5"	SIS-20, ALX360, SB-SBRM36

NON-VENTED FOR RTA, RB & RD SERIES



- 16 gauge galvanized or painted steel construction
- RC are insulated, painted, with 3" flanges and damper shelf
- RCG are non-insulated, galvanized, with 1 3/4" flanges
- RCGI are insulated, galvanized, with 1 3/4" flanges
- All are 10 1/4" high
- Shipped fully assembled

ROOF CURBS FOR RTA, RB & RD SERIES (Non-vented) 10 1/4" High

Part # Painted	Part # Galv (Non-Insulated)	Part # Galv (Insulated)	Curb OD Dimension sq	Curb fits Models
RC18	RCG21.625	RCGI21.625	21.6"	RTA18
RC24	RCG29.125	RCGI29.125	29.1"	RTA-RB-RD24
RC30	RCG35.125	RCGI35.125	35.1"	RTA-RB-RD30
RC36	RCG41.125	RCGI41.125	41.1"	RTA-RB-RD36
RC42	RCG47.125	RCGI47.125	47.1"	RTA-RB-RD42-RTASH
RC48	RCG53.125	RCGI53.125	53.1"	RTA-RB-RD48-RTASH
RC54	RCG59.125	RCGI59.125	59.1"	RTA-RB54-RTASH
RC60	RCG67.125	RCGI67.125	67.1"	RTA-RB60

VENTED FOR ALX, SB-SBRM & SD-SDUB SERIES



RCGV ROOF CURB

- UL762 requires vents and minimum 40" from roof to outlet
- Curb height varies to meet UL762 (see table)
- RCGV are 18" high, RCGVL are 12" high
- RCGVH vary to meet UL762
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Non-insulated & shipped fully assembled

Part #	Part #	UL762 Curb Height	Curb OD Dimension sq	Curb Fits Models
Vented 18" high (RCGV) Vented 12" high (RCGVL)	To Meet UL762			
RCGV17.5 / RCGVL17.5	RCGVH17.5	27"	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCGV19.5 / RCGVL19.5	RCGVH19.5	25"	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, HRE-13, ALX105-C2, ALX105-C2
RCGV23.25 / RCGVL23.25	RCGV23.25	18"	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, HRE-16, ALX135-C2, ALX150-C2, ALX180-C2
RCGV26.5 / RCGVL26.5	RCGV26.5	18"	26.5"	ALX180, SB-SBRM-18, HRE-20, ALX165-C2
RCGV31.5 / RCGVL31.5	RCGV31.5	18"	31.5"	ALX210, ALX245, SB-SBRM-24, HRE-24
RCGV38.5 / RCGVL38.5	RCGV38.5	18"	38.5"	SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300