

Side Intake Filtered Air Supply Units WITH EC MOTOR

SISDD-EC SERIES

FEATURING EC MOTORS
- UP TO 70% EFFICIENCY



ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS

High efficiency direct drive motor
for energy efficient low maintenance
applications

FEATURES

- Side intake provides a means to meet supply and exhaust air separation in restaurant applications.
- Easy on-site addition of customer supplied air supply duct extension provides additional separation where necessary.
- Filters designed with large surface area for efficient filtration.
- Grey weather resistant baked powder coat finish.
- EC Motor offers true variable speed operation and up to 70% energy savings over PSC motors.

PERFORMANCE SPECIFICATIONS

MODEL	MOTOR			AIRFLOW (CFM @ Static Pressure)															
	HP	Variable Speed	Max RPM	0"				1/2"				1"				1 1/4"			
				High	FEI	Low	FEI	High	FEI	Low	FEI	High	FEI	Low	FEI	High	FEI	Low	FEI
SIS9DD050EC	1/2	Y*	1200	1600	-	750	-	1450	-	600	-	1200	-	500	-	450	-	400	-
SIS9DD100EC	1	Y*	1200	2050	0.59	750	1.85	1950	0.75	600	1.5	1200	1.11	500	1.17	450	1.07	400	1.06
SIS10DD050EC	1/2	Y*	1100	1975	-	1100	-	1400	-	400	-	800	-	400	-	-	-	-	-
SIS10DD100EC	1	Y*	1100	2500	0.61	1100	1.57	2050	0.85	400	1.62	1400	1.11	400	1.28	750	1.23	300	1.09
SIS12DD050EC	1/2	Y*	1000	2600	-	1800	-	1925	-	400	-	850	-	400	-	600	-	300	-
SIS12DD100EC	1	Y*	1000	3300	0.58	1800	1.25	2800	0.8	400	1.37	2300	0.96	400	1.07	1650	1.07	300	0.92

* Minimum motor speed 425 RPM (EC Models)

EC motors can be controlled using the built in potentiometer on motor or by using a 0 to 10 V controller, or by a remote potentiometer.


REVIEW FAN CURVES BEFORE ADJUSTING RPM TO ENSURE LOAD DOES NOT EXCEED MOTOR HP.

DIMENSIONS

MODEL	A	B	D	E	F	G	H	L	M	Z	FILTERS		*INSIDE CABINET	WEIGHT (lbs) without motors
											SIZE	QUANTITY		
SIS-9DD	24 3/8"	19 3/8"	10 1/4"	11 13/16"	6 9/32"	7 1/16"	7 1/16"	19 1/4"	16 9/16"	21 1/4"	16" x 24" x 1"	1	24"x 24"	70
SIS-10DD	28 3/8"	21 3/8"	11 3/8"	13 1/8"	7 5/8"	8 1/2"	8 1/2"	20 1/2"	18 9/16"	25 3/4"	15" x 20" x 1"	2	28"x 28"	87
SIS-12DD	32 3/8"	24 5/8"	13 7/16"	15 5/8"	8 3/8"	9 15/32"	9 15/32"	25 3/8"	21 9/16"	30 3/4"	20" x 25" x 1" & 16" x 25" x 1"	1 & 1	32"x 32"	117

* Curb size to be smaller than inside cabinet to allow for flashing and roofing.

** Includes filter section.

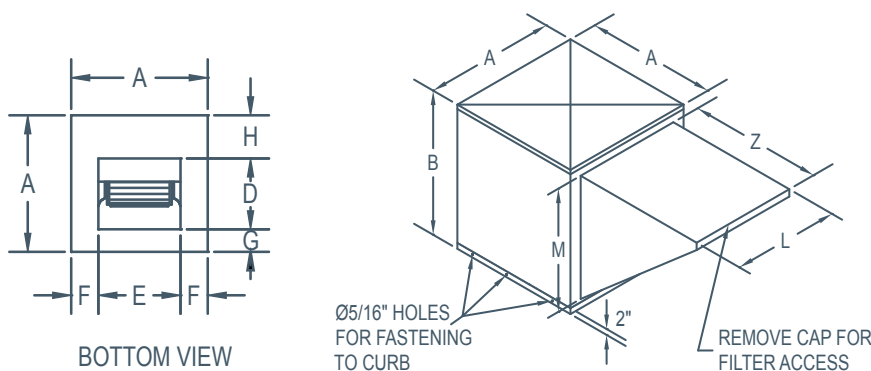

Options & Accessories



BACKDRAFT DAMPERS

- Fits the outlet of all 200, 400, 600, 9200 and BI Series Utility Blowers.
- Constructed of 16 ga. aluminum.
- Gravity activated.
- Easily field installed.



INLET SCREENS

- Fits all single outlet 400, 600 and BI Series Utility Blowers.
- Round inlet screens mount on the inlet collars of the blowers.
- Easily field installed.




OUTLET SCREENS

- Fits all single inlet 400, 600 and BI Series Utility Blowers.
- Rectangular outlet screens mount over the square outlet of the units.
- Easily field installed.



BOLTED CLEAN OUT DOOR

- Allows easy access for inspection and cleaning of the wheel & housing.
- A tight pattern of bolts holds the gasketed door in place on the curved face of the scroll shaped wheel housing.




V CAP

- For BI upblast utility sets to reduce rain and snow entry.
- Easily field installed above the blower outlet.



HEAT SLINGER

- Cast aluminum disk with radial blades, split for easy field installation on the shaft between the housing and the inboard bearing.
- Can be used on Canarm BI/600 units.
- Provides protection for the bearing from excessive heat. The slinger dissipates heat from the shaft before reaching the bearing and increases the air flow across the inboard bearings.
- Good for a maximum of 400° Fahrenheit air stream temperature.



SHAFT SEAL

- Good for a maximum of 220° Fahrenheit.
- Prevents migration of fumes, grease vapors, dust etc from the airstream into the compartment housing motors, drives and bearings.
- Can be used on Canarm's BI/600 Utility units.
- Easily field installed.
- Installed on the shaft between the bearing plate and back panel in the motor compartment.
- Constructed of 1/4" thick polyethylene for a good seal and resistance to many substances.



DRAIN FITTING

- Large, 2" diameter threaded pipe fitting resists clogging.
- Can be connected to a drainage system if desired.
- Factory welded in place, prior to painting.
- Also available separately.




VIBRATION ISOLATORS RUBBER

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.




VIBRATION ISOLATORS SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor use only.



VIBRATION ISOLATORS OUTDOOR SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Designed for outdoor use. Housed to resist lateral motion from winds.




ALUMINUM WHEEL

- For use with the BI & BI-RM series units.
- AMCA type B classification for spark resistant construction

Options & Accessories Roof Curbs

NON-VENTED FOR 300, 700, SIS, ALX, SB-SBRM & SD-SDUB SERIES

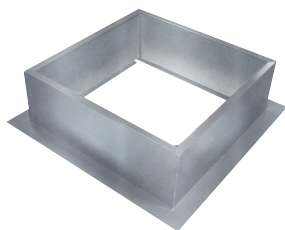


RCG ROOF CURB

- RCG are 18" high, RCGL are 12" high
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Insulated curbs available (RCGI or RCGLI)
- Shipped fully assembled

Please note Galvanized Curbs (RCG's) are for UL705 only.
For UL762 the curb must be vented and be a minimum of 40" from roof to outlet - use RCGV curbs (below)

Part # (Non-Insulated)	Part # (Insulated)	Curb OD Dimension sq	Curb fits Models
RCG17.5 / RCGL17.5	RCGI17.5 / RCGLI17.5	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCG18.5 / RCGL18.5	RCGI18.5 / RCGLI18.5	18.5"	307
RCG19.5 / RCGL19.5	RCGI19.5 / RCGLI19.5	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, ALX105-C2, ALX120-C2
RCG22.5 / RCGL22.5	RCGI22.5 / RCGLI22.5	22.5"	309,709,SIS-09
RCG23.25 / RCGL23.25	RCGI23.25 / RCGLI23.25	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, ALX135-C2, ALX150-C2, ALX180-C2
RCG26.5 / RCGL26.5	RCGI26.5 / RCGLI26.5	26.5"	ALX180, SIS-10, SB-SBRM-18, ALX165-C2
RCG30.5 / RCGL30.5	RCGI30.5 / RCGLI30.5	30.5"	312,712,715, SIS-12, SIG-12, SIG-15
RCG31.5 / RCGL31.5	RCGI31.5 / RCGLI31.5	31.5"	ALX210, ALX245, SB-SBRM-24
RCG34.5 / RCGL34.5	RCGI34.5 / RCGLI34.5	34.5"	315,718,SIS-15,SIS-18
RCG38.5 / RCGL38.5	RCGI38.5 / RCGLI38.5	38.5"	318, SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300
RCG42.5 / RCGL42.5	RCGI42.5 / RCGLI42.5	42.5"	SIS-20, ALX360, SB-SBRM36

NON-VENTED FOR RTA, RB & RD SERIES



- 16 gauge galvanized or painted steel construction
- RC are insulated, painted, with 3" flanges and damper shelf
- RCG are non-insulated, galvanized, with 1 3/4" flanges
- RCGI are insulated, galvanized, with 1 3/4" flanges
- All are 10 1/4" high
- Shipped fully assembled

ROOF CURBS FOR RTA, RB & RD SERIES (Non-vented) 10 1/4" High

Part # Painted	Part # Galv (Non-Insulated)	Part # Galv (Insulated)	Curb OD Dimension sq	Curb fits Models
RC18	RCG21.625	RCGI21.625	21.6"	RTA18
RC24	RCG29.125	RCGI29.125	29.1"	RTA-RB-RD24
RC30	RCG35.125	RCGI35.125	35.1"	RTA-RB-RD30
RC36	RCG41.125	RCGI41.125	41.1"	RTA-RB-RD36
RC42	RCG47.125	RCGI47.125	47.1"	RTA-RB-RD42-RTASH
RC48	RCG53.125	RCGI53.125	53.1"	RTA-RB-RD48-RTASH
RC54	RCG59.125	RCGI59.125	59.1"	RTA-RB54-RTASH
RC60	RCG67.125	RCGI67.125	67.1"	RTA-RB60

VENTED FOR ALX, SB-SBRM & SD-SDUB SERIES



RCGV ROOF CURB

- UL762 requires vents and minimum 40" from roof to outlet
- Curb height varies to meet UL762 (see table)
- RCGV are 18" high, RCGVL are 12" high
- RCGVH vary to meet UL762
- 18 gauge galvanized steel construction
- 1 3/4" flanges
- Non-insulated & shipped fully assembled

Part #	Part #	UL762 Curb Height	Curb OD Dimension sq	Curb Fits Models
Vented 18" high (RCGV) Vented 12" high (RCGVL)	To Meet UL762			
RCGV17.5 / RCGVL17.5	RCGVH17.5	27"	17.5"	ALX105, ALX120, SD-SDUB-10, SD-SDUB-12
RCGV19.5 / RCGVL19.5	RCGVH19.5	25"	19.5"	ALX135, ALX150, SB-SBRM-13, SD-SDUB-30, SD-SDUB-33, SD-SDUB-50, HRE-13, ALX105-C2, ALX105-C2
RCGV23.25 / RCGVL23.25	RCGV23.25	18"	23.25"	ALX165, SB-SBRM-15, SD-SDUB-85, HRE-16, ALX135-C2, ALX150-C2, ALX180-C2
RCGV26.5 / RCGVL26.5	RCGV26.5	18"	26.5"	ALX180, SB-SBRM-18, HRE-20, ALX165-C2
RCGV31.5 / RCGVL31.5	RCGV31.5	18"	31.5"	ALX210, ALX245, SB-SBRM-24, HRE-24
RCGV38.5 / RCGVL38.5	RCGV38.5	18"	38.5"	SB-SBRM-30, ALX210-C2, ALX245-C2, ALX300

Options & Accessories Disconnect Switches



**EL1/3-25A
MOISTURE RESISTANT SWITCH**

Single or Three Phase
Moisture resistant, IP65
25 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**DS1/3-30A
DISCONNECT SWITCH**

Single or Three Phase
Disconnect NEMA 3R (3030D)
30 Amps, 3 Poles

HP Ratings
120V AC - 3hp
240V AC - 7.5hp
480V AC - 15hp
600V AC - 20hp



**KG1-2P1PH
TOGGLE SWITCH**

Single Phase, Non-reversing,
toggle operation NEMA 1
(2510KG1)
30 Amps, 2 Poles

HP Ratings
120V AC - 2hp
240V AC - 2hp
480V AC - 2hp



**8890-5426-1
TOGGLE SWITCH WITH PILOT LIGHT**

15 Amps, 2 Poles

HP Ratings
120V AC - 0.5hp



**8890-54522-W
TOGGLE SWITCH**

20 Amps, 2 Poles

HP Ratings
120V AC - 1hp
240V AC - 2hp



**8890-MS403
TOGGLE SWITCH**

40 Amps, 3 Poles

HP Ratings
120V AC - 7.5hp
240V AC - 15hp
480V AC - 20hp
600V AC - 40hp



**8890-N13NC
SWITCH ENCLOSURE
WITH LOCKOUT**

NEMA 1 Steel switch