



Forward Curved Inline Duct Blowers WITH EC MOTOR

FEATURING EC MOTORS
- UP TO 70% EFFICIENCY



ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS

200DD-EC, 9200DD-EC

FEATURES

- High efficiency direct drive motor for energy efficient, low maintenance applications.
- Forward curved blowers operate at low RPM for low noise levels.
- Attractive grey baked on powder coat finish.
- EC Motor offers true variable speed operation and up to 70% energy savings over PSC motors.

** Minimum motor speed 425 RPM (EC Models)*

*EC motors can be controlled using the built in potentiometer on motor
or by using a 0 to 10 V controller, or by a remote potentiometer.*

*REVIEW FAN CURVES BEFORE ADJUSTING RPM TO ENSURE LOAD
DOES NOT EXCEED MOTOR HP.*

ACCESSORIES

- Filter sections
- Intake Hoods
- Vibration Isolators
- Back Draft Dampers

200DD-EC


Indoor Applications, Insulated or
Non-Insulated.

9200DD-EC

Heavy duty, Insulated Indoor or
Outdoor Applications

200DD-EC, 9200DD-EC

Forward Curved Inline Duct Blowers WITH EC MOTOR

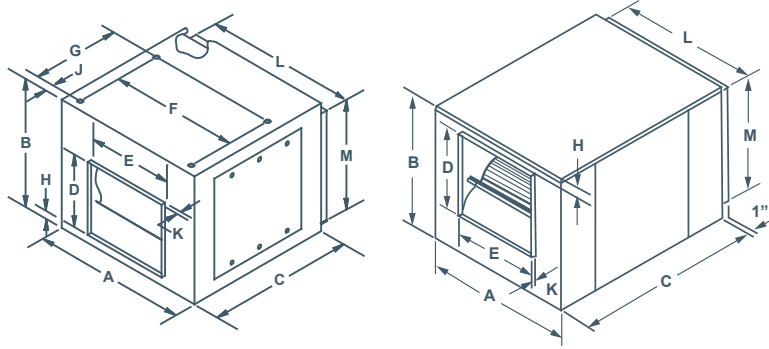

DIMENSIONS

MODEL	A	B	C	OUTLET		F	G	H	J	K	INLET		SHAFT DIAMETER	WEIGHT (lbs) without motor
				D	E						L	M		
209DD	21"	18"	23"	10 1/4"	11 13/16"	17 1/2"	11 3/4"	1 1/4"	1 3/4"	7/8"	19"	16"	3/4"	55
210DD	22 1/4"	20"	24 3/4"	11 3/8"	13 1/8"	18 3/4"	13 3/8"	1 1/4"	1 3/4"	7/8"	20 1/4"	18"	3/4"	65
212DD	27"	23"	27 1/2"	13 7/16"	15 5/8"	23 1/2"	16 1/8"	1 1/4"	1 3/4"	7/8"	25"	21"	3/4"	82
9209DD	21"	18"	23"	11 1/4"	12 3/4"	N/A	N/A	1"	N/A	1 1/8"	19"	16"	3/4"	61
9210DD	22 1/4"	20"	24 3/4"	12 3/8"	14 1/8"	N/A	N/A	1"	N/A	1 1/8"	20 1/4"	18"	3/4"	70
9212DD	30 1/8"	24 3/4"	34"	14 1/2"	16 5/8"	N/A	N/A	2 1/8"	N/A	1 1/8"	25 1/8"	21 1/8"	1"	143


PERFORMANCE SPECIFICATIONS

MODEL	MOTOR			TYPICAL MAXIMUM CFM @ SP																				
	HP	Variable Speed	Max RPM	Speed	1/4"				1/2"				3/4"				1"				1 1/4"			
					CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
209DD050EC	1/2	Y*	1200	High	1800	-	-	-	1550	-	-	-	1200	-	-	-	950	-	-	-	-	-	-	-
				Low	700	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	-	-	-	-
209DD100EC	1	Y*	1200	High	2300	0.98	0.79	0.87	2100	0.92	0.89	0.82	1900	0.95	0.89	0.85	1500	0.80	0.94	0.72	-	-	-	-
				Low	700	0.10	1.60	0.13	600	0.13	1.53	0.15	600	0.19	1.38	0.21	600	0.26	1.25	0.27	-	-	-	-
210DD050EC	1/2	Y*	1100	High	2000	-	-	-	1850	-	-	-	1650	-	-	-	1500	-	-	-	950	-	-	-
				Low	800	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
210DD100EC	1	Y*	1100	High	2639	1.00	0.82	0.89	2500	0.99	0.93	0.88	2325	0.93	1.07	0.83	1800	0.65	1.30	0.60	825	0.34	1.53	0.34
				Low	800	0.08	1.99	0.11	600	0.10	1.83	0.13	600	0.16	1.56	0.18	600	0.21	1.48	0.22	600	0.28	1.33	0.28
212DD050EC	1/2	Y*	1000	High	2600	-	-	-	2100	-	-	-	1800	-	-	-	1550	-	-	-	1200	-	-	-
				Low	900	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-	600	-	-	-
212DD100EC	1	Y*	1000	High	3400	0.98	0.98	0.87	3100	0.95	1.09	0.85	2750	0.89	1.20	0.80	2450	0.88	1.25	0.79	1200	0.45	1.41	0.43
				Low	900	0.08	2.10	0.11	600	0.10	1.81	0.13	600	0.16	1.55	0.18	600	0.21	1.47	0.22	600	0.28	1.32	0.28

MODEL	MOTOR			TYPICAL MAXIMUM CFM @ SP																				
	HP	Variable Speed	Max RPM	Speed	1/4"				1/2"				3/4"				1"				1 1/4"			
					CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)	CFM	BHP	FEI	FEPact (KW)
9209DD050EC	1/2	Y*	1200	High Low	1800 700	-	-	-	1550 600	-	-	-	1200 600	-	-	-	950 600	-	-	-	-	-	-	-
9209DD100EC	1	Y*	1200	High Low	2300 700	0.98 0.10	0.79 1.60	0.87 0.13	2100 600	0.92 0.13	0.89 1.53	0.82 0.15	1900 600	0.95 0.19	0.89 1.38	0.85 0.21	1500 600	0.80 0.26	0.94 1.25	0.72 0.27	-	-	-	-
9210DD050EC	1/2	Y*	1100	High Low	2000 800	-	-	-	1850 600	-	-	-	1650 600	-	-	-	1500 600	-	-	-	950 600	-	-	-
9210DD100EC	1	Y*	1100	High Low	2639 800	1.00 0.08	0.82 1.99	0.89 0.11	2500 600	0.99 0.10	0.93 1.83	0.88 0.13	2325 600	0.93 0.16	1.07 1.56	0.83 0.18	1800 600	0.65 0.21	1.30 1.48	0.60 0.22	825 600	0.34 0.28	1.53 1.33	0.34 0.28
9212DD050EC	1/2	Y*	1000	High Low	2600 900	-	-	-	2100 600	-	-	-	1800 600	-	-	-	1550 600	-	-	-	1200 600	-	-	-
9212DD100EC	1	Y*	1000	High Low	3400 900	0.98 0.08	0.98 2.10	0.87 0.11	3100 600	0.95 0.10	1.09 1.81	0.85 0.13	2750 600	0.89 0.16	1.20 1.55	0.80 0.18	2450 600	0.88 0.21	1.25 1.47	0.79 0.22	1200 600	0.45 0.28	1.41 1.32	0.43 0.28

TYPICAL SYSTEM COMPRISED OF FILTER SECTION, HEATING COIL & DUCT BLOWER


(Shown with side panels removed for illustrative purposes.)

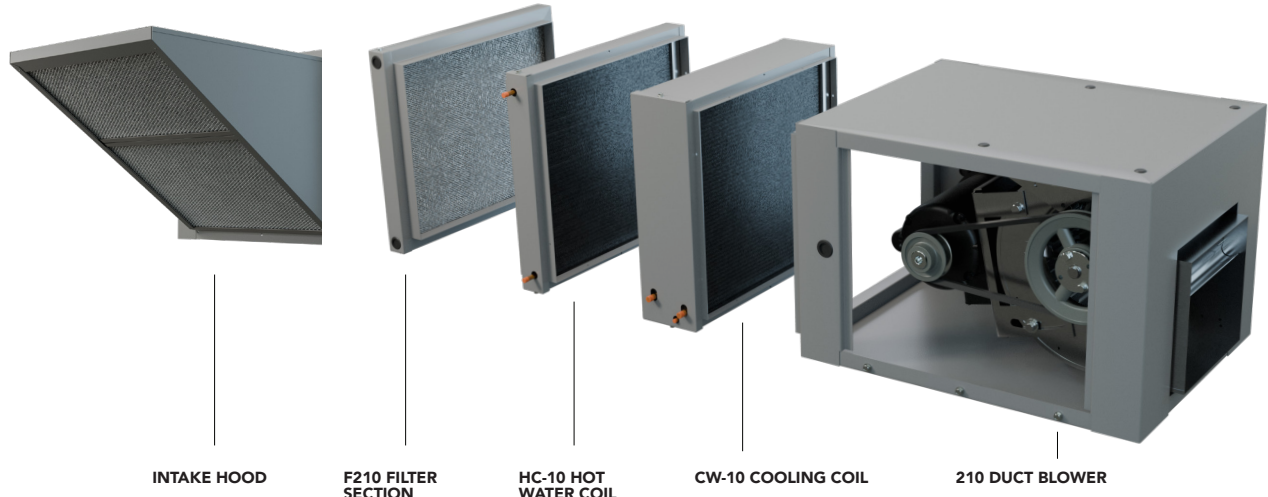


Options & Accessories Filter Sections & Intake Hoods

H9200 INTAKE HOOD

For 9200 Series Duct Blowers

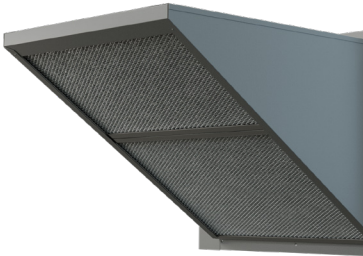


MODEL	L	M	Z	FILTER SIZE	QUANTITY	UNIT WEIGHT (LBS)
H9209	19 1/4"	16 9/16"	21 1/4"	16" X 24"	1	14
H9210	20 1/2"	18 9/16"	25 3/4"	15" X 20"	2	16
H9212	25 3/8"	21 9/16"	30 3/4"	20" X 25" 16" X 25"	2	27
H9215	31 3/16"	25 13/16"	33 1/2"	20" X 28 1/2"	2	38
H9218	35 5/8"	32 11/16"	40 1/4"	20" X 25" (2) 16" X 25"	3	50
H9220	38 5/8"	35 9/16"	22"	FILTERS NOT INCLUDED USE F9220A		40

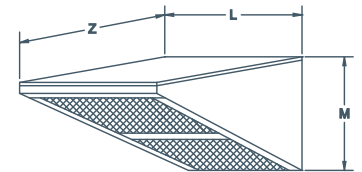


F200A & F9200A FILTER SECTION


For IDB, 200 & 9200 Series Duct Blowers

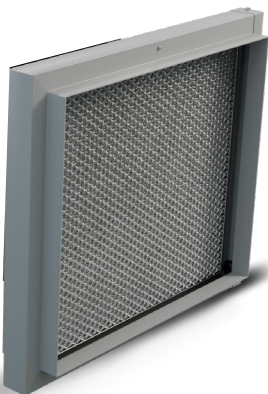

MODEL	A	B	N	P	FILTER SIZE	QUANTITY	UNIT WEIGHT (LBS)
F207A	17 3/4"	15 3/8"	16"	13 1/2"	14 1/8" X 16 5/8"	1	11
F209A	21"	18"	19 1/8"	16 1/8"	16 3/4" X 19 7/8"	1	12
F210A	22 1/4"	20"	20 3/8"	18 1/8"	18 3/4" X 21 1/8"	1	14
F212A	27"	23"	25 1/8"	21 1/8"	21 3/4" X 25 7/8"	1	16
F215A	32 1/2"	26 3/4"	30 5/8"	25 1/8"	25 3/4" X 31"	1	21
F218A	37"	33 1/4"	35 1/4"	31 1/2"	32 1/4" X 35 7/8"	1	46
F9220A	39 3/4"	37 1/4"	38 1/2"	35 1/4"	20" X 25"	6	64



10A



Series F9200A

Options & Accessories Heating & Cooling Coils



HC SERIES - 2 Row Coil

Hot Water Heating Coils

Horizontal or Vertical Installation




CW SERIES - 4 Row Coil

Chilled Water Cooling Coils with built in Condensate pan


FEATURES

- Designed for use with matching Canarm 200, IDB or 9200 Series Duct Blower & Filter Section.
- Modular concept provides the flexibility and convenience of assembling readily available components into a system to meet custom heating and cooling requirements.
- Lead free construction.
- Grey baked powder coat cabinet finish.
- Convenient for both new or renovation installations.
- Aluminum finish on copper tube construction.
- Suitable for remote installation in duct.
- All coils are sized to mount to the inlet of the corresponding sized duct blower or coil and filter section as illustrated in the modular set up.

DIMENSIONS



HC SERIES



CW SERIES

MODEL	HC-CW COILS					HC COILS			CW COILS			
	A (HC)	A (CW)	B	N	P	INLET	OUTLET	WEIGHT (LBS)	INLET	OUTLET	WEIGHT (LBS)	
HC-07 & CW-07	17 3/4"	17 3/4"	15 3/8"	16"	13 1/2"	5/8"	5/8"	10	5/8"	5/8"	22	
HC-09 & CW-09	21"	21"	18"	19 1/8"	16 1/8"	5/8"	5/8"	14	7/8"	7/8"	29	
HC-10 & CW-10	22 1/4"	22 1/4"	20"	20 3/8"	18 1/8"	5/8"	5/8"	17	7/8"	7/8"	36	
HC-12 & CW-12	27"	27"	23"	25 1/8"	21 1/8"	3/4"	3/4"	23	7/8"	7/8"	42	
HC-15 & CW-15	32 1/2"	33 1/2"	26 3/4"	30 5/8"	25 1/8"	3/4"	3/4"	32	7/8"	7/8"	61	
									DRAIN IS 5/8" IN -OD			

MATCHING COIL SECTION				
DUCT BLOWER	HEATING COIL	CHILLED WATER COIL	FILTER	INTAKE HOOD
207 / IDB07	HC-07	CW-07	F207A	NA
209 / IDB09 / 9209	HC-09	CW-09	F209A	H9209
210 / IDB10 / 9210	HC-10	CW-10	F210A	H9210
212 / IDB12 / 9212	HC-12	CW-12	F212A	H9212
215 / IDB15 / 9215	HC-15	CW-15	F215A	H9215

Options & Accessories Vibration Isolators & More




VIBRATION ISOLATORS RUBBER

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.



VIBRATION ISOLATORS SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor use only.

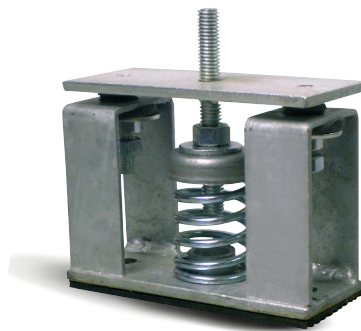

VIBRATION ISOLATORS OUTDOOR SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Designed for outdoor use. Housed to resist lateral motion from winds.



HANGING VIBRATION ISOLATORS

- Hanging rubber-in-shear isolators.
- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.