

# Single & Twin Forward Curved Inline Duct Blowers

## 200 & 9200 SERIES




### 200 SERIES

Indoor Applications,  
Insulated or Non-Insulated

### FEATURES

- Wheel Diameters: 7" through 20"
- CFM: Approximately 1000 to 12,500 CFM in a single blower (Twins available).
- Static Pressure: Usage to about 3" static pressure is common, although allowable range is higher.
- Constructed from cold rolled steel, with grey baked on powder coat. The outdoor unit uses protective galvalume steel under the powder coat.
- Forward Curved blowers operate at low RPM for low noise levels.
- Heavy duty ball bearings suitable for -65° F to +250° F.
- Keywayed shafts both ends for clockwise or counter clockwise rotation.
- Saddle type motor mounting platform provides extended belt tension adjustment range on all models.
- 9200 series may be mounted vertically or horizontally. 9200-VIB option is horizontal mount only. Cannot be vertically mounted.
- Will not "surge", "hunt", or "stall".
- Optional variable pitch motor pulley permits field adjustment (typically + or - 15%) to match air delivery needs.
- For the quietest operational needs we offer optional internal spring isolation of the blower/motor from the housing thus greatly reducing radiated cabinet noise.
- Our twins (two duct blowers on a common shaft) is a wide but not tall solution for situations where vertical space is limited.
- Quiet forward curved blowers operate at ½ the rpm of other inline solutions.
- An outdoor series, 9200, is available.

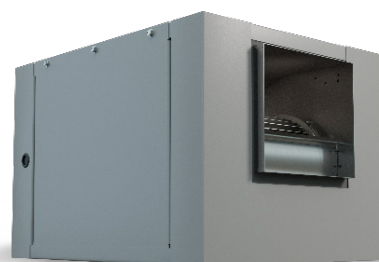

### 9200 SERIES

Heavy duty, Insulated Indoor  
or Outdoor Applications

**9200-VIB** Model available with  
internal Spring Vibration Isolation



### TWIN UNIT

Use a common shaft for balanced air supply  
by each blower. Call for pricing & availability.




## 200& 9200 SERIES

# Single & Twin Forward Curved Inline Duct Blowers

## TYPICAL APPLICATIONS FOR OUR INLINE BLOWERS

- An Inline make-up air solution for cases where a rooftop curb mounted solution is not available.
- As an air moving module for systems built up with other components such as heating/cooling coils.
- Noise sensitive areas - the low rpm forward curved wheel typically radiates less vibration than higher rpm backward inclined wheel solutions.
- When the application requires an air mover in a duct system located in a ceiling space.
  - Redistribution or recirculation of air in a work space.
- Interlocked with entry doors to prevent entry of cold outdoor air into retail sales space and thus greets customers with warmth.
  - Bathroom/ rest room exhaust - one duct blower serving multiple intakes.

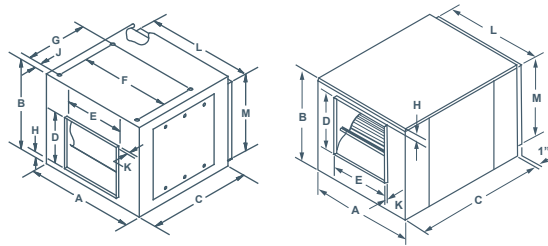

## DIMENSIONS

| MODEL | A       | B       | C       | OUTLET   |           | F       | G       | H      | J      | K      | INLET   |         | SHAFT DIAMETER | WEIGHT (lbs) without motor |
|-------|---------|---------|---------|----------|-----------|---------|---------|--------|--------|--------|---------|---------|----------------|----------------------------|
|       |         |         |         | D        | E         |         |         |        |        |        | L       | M       |                |                            |
| 207   | 18"     | 15 3/8" | 23"     | 8 1/4"   | 9 3/16"   | 14 1/2" | 9 5/8"  | 1 1/4" | 1 1/4" | 7/8"   | 15 7/8" | 13 3/8" | 3/4"           | 43                         |
| 209   | 21"     | 18"     | 23"     | 10 1/4"  | 11 13/16" | 17 1/2" | 11 3/4" | 1 1/4" | 1 3/4" | 7/8"   | 19"     | 16"     | 3/4"           | 55                         |
| 210   | 22 1/4" | 20"     | 24 3/4" | 11 3/8"  | 13 1/8"   | 18 3/4" | 13 3/8" | 1 1/4" | 1 3/4" | 7/8"   | 20 1/4" | 18"     | 3/4"           | 65                         |
| 212   | 27"     | 23"     | 27 1/2" | 13 7/16" | 15 5/8"   | 23 1/2" | 16 1/8" | 1 1/4" | 1 3/4" | 7/8"   | 25"     | 21"     | 3/4"           | 82                         |
| 215   | 33 1/2" | 28"     | 32"     | 15 7/8"  | 18 5/8"   | 28"     | 19 1/2" | 2 5/8" | 1 3/4" | 7/8"   | 30 1/2" | 25"     | 1"             | 140                        |
| MODEL | A       | B       | C       | OUTLET   |           | F       | G       | H      | J      | K      | INLET   |         | SHAFT DIAMETER | WEIGHT (lbs) without motor |
|       |         |         |         | D        | E         |         |         |        |        |        | L       | M       |                |                            |
| 9209  | 21"     | 18"     | 23"     | 11 1/4"  | 12 3/4"   | N/A     | N/A     | 1"     | N/A    | 1 1/8" | 19"     | 16"     | 3/4"           | 61                         |
| 9210  | 22 1/4" | 20"     | 24 3/4" | 12 3/8"  | 14 1/8"   | N/A     | N/A     | 1"     | N/A    | 1 1/8" | 20 1/4" | 18"     | 3/4"           | 70                         |
| 9212  | 30 1/8" | 24 3/4" | 34"     | 14 1/2"  | 16 5/8"   | N/A     | N/A     | 2 1/8" | N/A    | 1 1/8" | 25 1/8" | 21 1/8" | 1"             | 143                        |
| 9215  | 33 3/4" | 28 5/8" | 38 1/8" | 17"      | 19 5/8"   | N/A     | N/A     | 2 1/8" | N/A    | 1 1/8" | 30 5/8" | 25 1/4" | 1"             | 176                        |
| 9218  | 41 1/2" | 34"     | 44"     | 19 5/8"  | 22 5/8"   | N/A     | N/A     | 2 3/4" | N/A    | 1 1/8" | 35 3/8" | 31 5/8" | 1"             | 323                        |
| 9220  | 44 3/4" | 41 1/8" | 57 1/2" | 25 3/4"  | 25 3/4"   | N/A     | N/A     | 3"     | N/A    | 1 1/8" | 38 3/8" | 35 1/8" | 1 7/16"        | 515                        |

## PERFORMANCE SPECS

| TYPICAL MAXIMUM CFM @ SP |         |       |      |             |       |       |      |             |           |       |      |             |       |      |      |             |           |      |      |             |        |        |
|--------------------------|---------|-------|------|-------------|-------|-------|------|-------------|-----------|-------|------|-------------|-------|------|------|-------------|-----------|------|------|-------------|--------|--------|
| MODEL                    | 1/2" SP |       |      |             | 1" SP |       |      |             | 1 1/2" SP |       |      |             | 2" SP |      |      |             | 2 1/2" SP |      |      |             | Min HP | Max HP |
|                          | CFM     | BHP   | FEI  | FEPact (kW) | CFM   | BHP   | FEI  | FEPact (kW) | CFM       | BHP   | FEI  | FEPact (kW) | CFM   | BHP  | FEI  | FEPact (kW) | CFM       | BHP  | FEI  | FEPact (kW) |        |        |
| 207                      | 1400    | 0.68  | 0.80 | 0.69        | 1300  | 0.69  | 0.96 | 0.70        | 1100      | 0.66  | 1.05 | 0.67        | 1000  | 0.72 | 1.08 | 0.73        | 800       | 0.73 | 1.04 | 0.74        | 1/6    | 3/4    |
| 209                      | 2000    | 0.75  | 0.91 | 0.76        | 1800  | 0.75  | 1.09 | 0.76        | 1500      | 0.71  | 1.21 | 0.72        | 1100  | 0.71 | 1.12 | 0.72        | 800       | 0.71 | 1.04 | 0.72        | 1/6    | 3/4    |
| 9209                     | 2500    | 1.36  | 0.65 | 1.30        | 2400  | 1.41  | 0.81 | 1.34        | 2300      | 1.5   | 0.91 | 1.42        | 2100  | 1.48 | 1.01 | 1.40        | 1900      | 1.49 | 1.07 | 1.41        | 1/6    | 1 1/2  |
| 210                      | 3000    | 1.46  | 0.77 | 1.38        | 2800  | 1.41  | 0.96 | 1.34        | 2600      | 1.49  | 1.04 | 1.41        | 2300  | 1.5  | 1.09 | 1.42        | 1900      | 1.47 | 1.08 | 1.39        | 1/6    | 1 1/2  |
| 9210                     | 2800    | 1.39  | 0.74 | 1.20        | 2600  | 1.45  | 0.81 | 1.37        | 2300      | 1.43  | 0.91 | 1.35        | 2000  | 1.49 | 0.93 | 1.40        | 1600      | 1.46 | 0.92 | 1.38        | 1/6    | 1 1/2  |
| 212                      | 3700    | 1.44  | 0.86 | 1.37        | 3300  | 1.47  | 0.99 | 1.39        | 2900      | 1.5   | 1.07 | 1.03        | 2400  | 1.47 | 1.10 | 1.39        | 1600      | 1.43 | 0.93 | 1.36        | 1/6    | 1 1/2  |
| 9212                     | 4900    | 2.91  | 0.63 | 2.62        | 4600  | 3     | 0.74 | 2.70        | 4200      | 2.92  | 0.84 | 2.63        | 3900  | 2.99 | 0.91 | 2.69        | 3500      | 2.92 | 0.98 | 2.63        | 1/6    | 3      |
| 215                      | 6100    | 2.9   | 0.77 | 2.61        | 5800  | 2.95  | 0.93 | 2.65        | 5000      | 2.98  | 0.96 | 2.68        | 4100  | 2.93 | 0.94 | 2.64        | 3700      | 2.93 | 1.00 | 2.64        | 1/3    | 3      |
| 9215                     | 7700    | 4.95  | 0.62 | 4.33        | 7200  | 4.88  | 0.74 | 4.27        | 6800      | 5     | 0.83 | 4.37        | 6300  | 4.96 | 0.91 | 4.34        | 5800      | 4.97 | 0.96 | 4.35        | 1/3    | 5      |
| 218                      | 9700    | 4.93  | 0.74 | 4.32        | 9000  | 4.97  | 0.86 | 4.35        | 8200      | 4.95  | 0.96 | 4.33        | 7400  | 4.97 | 1.01 | 4.35        | 6200      | 4.94 | 0.98 | 4.32        | 1/2    | 5      |
| 9218                     | 9500    | 4.95  | 0.71 | 4.33        | 8800  | 4.91  | 0.85 | 4.30        | 8000      | 4.94  | 0.93 | 4.32        | 7200  | 4.98 | 0.98 | 4.36        | 6100      | 4.92 | 0.97 | 4.31        | 1/2    | 5      |
| 9220                     | 16000   | 14.78 | 0.45 | 12.50       | 15400 | 14.88 | 0.54 | 12.50       | 14800     | 14.96 | 0.62 | 12.60       | 14100 | 14.9 | 0.69 | 12.60       | 13300     | 14.8 | 0.75 | 12.50       | 3/4    | 15     |

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet.  
Performance ratings do not include the effect of appurtenances (accessories).



SCAN TO  
VIEW FEI  
CHARTS



SCAN TO  
USE DELAIR  
SOFTWARE




Canarm certifies that the 200 and 9200 Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 & 311 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air and sound performance only. The 200 and 9200 Series shown herein are not approved by AMCA for FEI ratings. June 30 2026

## TYPICAL SYSTEM COMPRISED OF FILTER SECTION, HEATING COIL & DUCT BLOWER


(Shown with side panels removed for illustrative purposes.)

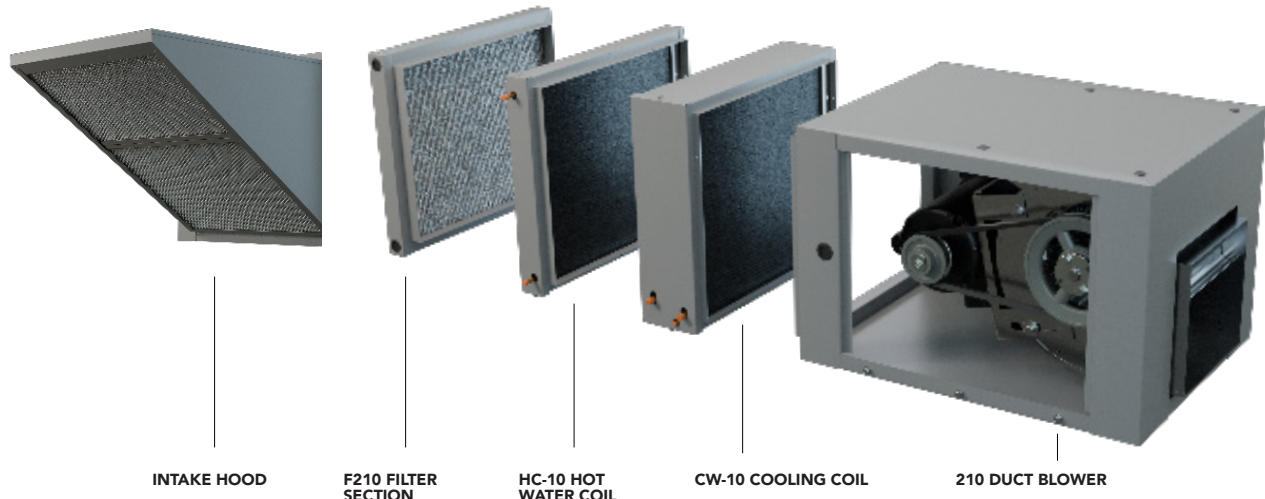


## Options & Accessories Filter Sections & Intake Hoods

### H9200 INTAKE HOOD

For 9200 Series Duct Blowers

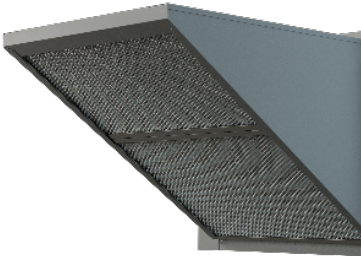


| MODEL | L        | M         | Z       | FILTER SIZE                     | QUANTITY | UNIT WEIGHT (LBS) |
|-------|----------|-----------|---------|---------------------------------|----------|-------------------|
| H9209 | 19 1/4"  | 16 9/16"  | 21 1/4" | 16" X 24"                       | 1        | 14                |
| H9210 | 20 1/2"  | 18 9/16"  | 25 3/4" | 15" X 20"                       | 2        | 16                |
| H9212 | 25 3/8"  | 21 9/16"  | 30 3/4" | 20" X 25"<br>16" X 25"          | 2        | 27                |
| H9215 | 31 3/16" | 25 13/16" | 33 1/2" | 20" X 28 1/2"                   | 2        | 38                |
| H9218 | 35 5/8"  | 32 11/16" | 40 1/4" | 20" X 25" (2)<br>16" X 25"      | 3        | 50                |
| H9220 | 38 5/8"  | 35 9/16"  | 22"     | FILTERS NOT INCLUDED USE F9220A |          | 40                |

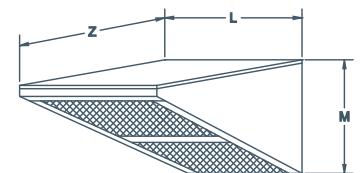


### F200A & F9200A FILTER SECTION


For IDB, 200 & 9200 Series Duct Blowers

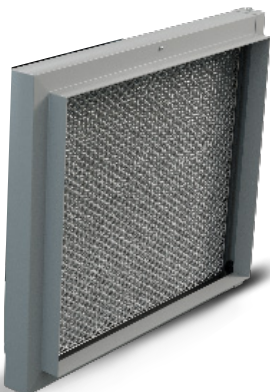

| MODEL  | A       | B       | N       | P       | FILTER SIZE       | QUANTITY | UNIT WEIGHT (LBS) |
|--------|---------|---------|---------|---------|-------------------|----------|-------------------|
| F207A  | 17 3/4" | 15 3/8" | 16"     | 13 1/2" | 14 1/8" X 16 5/8" | 1        | 11                |
| F209A  | 21"     | 18"     | 19 1/8" | 16 1/8" | 16 3/4" X 19 7/8" | 1        | 12                |
| F210A  | 22 1/4" | 20"     | 20 3/8" | 18 1/8" | 18 3/4" X 21 1/8" | 1        | 14                |
| F212A  | 27"     | 23"     | 25 1/8" | 21 1/8" | 21 3/4" X 25 7/8" | 1        | 16                |
| F215A  | 32 1/2" | 26 3/4" | 30 5/8" | 25 1/8" | 25 3/4" X 31"     | 1        | 21                |
| F218A  | 37"     | 33 1/4" | 35 1/4" | 31 1/2" | 32 1/4" X 35 7/8" | 1        | 46                |
| F9220A | 39 3/4" | 37 1/4" | 38 1/2" | 35 1/4" | 20" X 25"         | 6        | 64                |




10A



Series F9200A

## Options & Accessories Heating & Cooling Coils

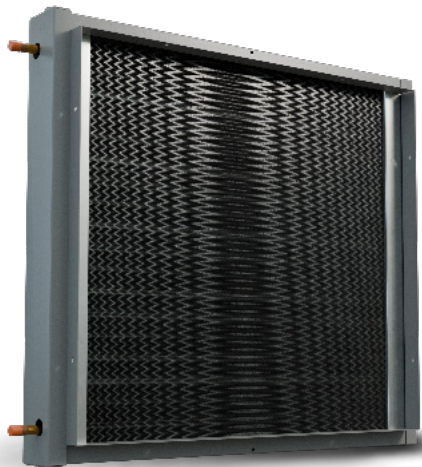

### HC SERIES - 2 Row Coil

Hot Water Heating Coils

Horizontal or Vertical Installation




### CW SERIES - 4 Row Coil

Chilled Water Cooling Coils with built in Condensate pan


## FEATURES

- Designed for use with matching Canarm 200, IDB or 9200 Series Duct Blower & Filter Section.
- Modular concept provides the flexibility and convenience of assembling readily available components into a system to meet custom heating and cooling requirements.
- Lead free construction.
- Grey baked powder coat cabinet finish.
- Convenient for both new or renovation installations.
- Aluminum finish on copper tube construction.
- Suitable for remote installation in duct.
- All coils are sized to mount to the inlet of the corresponding sized duct blower or coil and filter section as illustrated in the modular set up.

## DIMENSIONS



HC SERIES



CW SERIES

| MODEL                | HC-CW COILS |         |         |         |         |  | HC COILS |        |              | CW COILS |        |              |  |
|----------------------|-------------|---------|---------|---------|---------|--|----------|--------|--------------|----------|--------|--------------|--|
|                      | A (HC)      | A (CW)  | B       | N       | P       |  | INLET    | OUTLET | WEIGHT (LBS) | INLET    | OUTLET | WEIGHT (LBS) |  |
| HC-07 & CW-07        | 17 3/4"     | 17 3/4" | 15 3/8" | 16"     | 13 1/2" |  | 5/8"     | 5/8"   | 10           | 5/8"     | 5/8"   | 22           |  |
| HC-09 & CW-09        | 21"         | 21"     | 18"     | 19 1/8" | 16 1/8" |  | 5/8"     | 5/8"   | 14           | 7/8"     | 7/8"   | 29           |  |
| HC-10 & CW-10        | 22 1/4"     | 22 1/4" | 20"     | 20 3/8" | 18 1/8" |  | 5/8"     | 5/8"   | 17           | 7/8"     | 7/8"   | 36           |  |
| HC-12 & CW-12        | 27"         | 27"     | 23"     | 25 1/8" | 21 1/8" |  | 3/4"     | 3/4"   | 23           | 7/8"     | 7/8"   | 42           |  |
| HC-15 & CW-15        | 32 1/2"     | 33 1/2" | 26 3/4" | 30 5/8" | 25 1/8" |  | 3/4"     | 3/4"   | 32           | 7/8"     | 7/8"   | 61           |  |
| DRAIN IS 5/8" IN -OD |             |         |         |         |         |  |          |        |              |          |        |              |  |

| MATCHING COIL SECTION |              |                    |        |             |
|-----------------------|--------------|--------------------|--------|-------------|
| DUCT BLOWER           | HEATING COIL | CHILLED WATER COIL | FILTER | INTAKE HOOD |
| 207 / IDB07           | HC-07        | CW-07              | F207A  | NA          |
| 209 / IDB09 / 9209    | HC-09        | CW-09              | F209A  | H9209       |
| 210 / IDB10 / 9210    | HC-10        | CW-10              | F210A  | H9210       |
| 212 / IDB12 / 9212    | HC-12        | CW-12              | F212A  | H9212       |
| 215 / IDB15 / 9215    | HC-15        | CW-15              | F215A  | H9215       |