

FC Exhauster Belt Drive Utility Blowers


400 SERIES



**AVAILABLE WITH MOTORS &
DRIVES Factory installed.**
Consult Delair Software for details

FEATURES

- Universal frame allows for choice of discharge position.
- Multiple choice for motor mounting location with each discharge position.
- Motor mounting hardware supplied with models 407 to 418.
- Optional platform for models 420 to 425.
- Keywayed shafts
- Ball bearings suitable for -65° to + 250° F.
- Spider bearing brackets for models 407 - 418. Pillow block bearings with T bar support for models 420, 422 & 425.
- Optional back draft dampers, inlet & outlet screens and belt guards.
- Shafts 420, 422 & 425 models are keywayed for wheels and pulleys (407 to 418 models for pulleys only).



*Optional 1 to 15 HP Motor Platform for
Models 420, 422 & 425*



ACCESSORIES


- Inlet & Outlet Screens
- Corrosion Resistant Finishes
 - Vibration Isolation
 - Belt Guard

For more information on available accessories, see Roof Mount Ventilation section.

400 SERIES

FC Exhauster Belt Drive Utility Blowers

DIMENSIONS

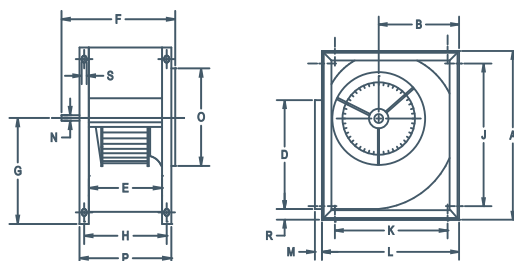

MODEL	A	B	D	E	F	G	H	J	K	L	M	N	O	P	R	S	WHEEL DIAMETER	WHEEL WIDTH	WEIGHT (lbs) without motor
407	14 1/4"	6 1/2"	8 3/8"	6 7/8"	11 5/8"	8 5/8"	8"	11 1/16"	8 7/8"	11 3/4"	3/4"	3/4"	9"	9"	1 1/2"	7/16"	8 1/26"	4 15/16"	16
409	17 1/4"	7 15/16"	10 1/4"	9 3/16"	13 15/16"	10 1/8"	10 5/16"	14 5/8"	11 3/4"	14 1/2"	3/4"	3/4"	10"	11 5/16"	1 1/2"	7/16"	9 13/16"	7 3/16"	23
410	19 1/8"	9"	11 3/8"	9 3/16"	13 15/16"	11 1/4"	10 5/16"	16 1/4"	13 1/2"	16 1/4"	3/4"	3/4"	12"	11 5/16"	1 1/2"	7/16"	11 1/8"	7 3/16"	26
412	22 1/4"	10 9/16"	13 1/2"	9 3/16"	13 15/16"	13"	10 5/16"	19 5/8"	16 1/4"	19"	3/4"	3/4"	14"	11 5/16"	1 1/2"	7/16"	12 7/8"	7 3/16"	30
415	29 3/4"	14 3/4"	17"	12 1/2"	17 3/8"	18 1/8"	13 3/4"	27 1/4"	22 5/8"	25 1/4"	3/4"	1"	17"	14 3/4"	1 1/2"	7/16"	15 1/2"	9 9/16"	56
418	30 3/4"	14 15/16"	18 7/8"	14"	20 3/8"	17 3/4"	15 5/8"	28 1/2"	24"	26 1/2"	3/4"	1"	18"	17 1/4"	1 1/2"	7/16"	18 1/2"	10 13/16"	87
420	38"	18 5/16"	24 3/4"	15 3/4"	24 1/4"	22 9/16"	17 1/4"	32 7/16"	25 7/16"	31 1/4"	1 1/2"	1 3/16"	21"	19 3/4"	2"	5/8"	20 7/16"	10 1/4"	189
422	41 1/2"	20 1/16"	27 1/4"	17 1/8"	25 5/8"	24 5/8"	18 5/8"	35 31/32"	28 15/32"	34 1/4"	1 1/2"	1 3/16"	22 1/2"	21 1/8"	2"	5/8"	22 1/8"	11 1/4"	214
425	46 3/4"	22 5/8"	31 1/4"	19 5/8"	28 1/2"	27 3/4"	21 1/8"	41 7/32"	32 17/32"	38 3/8"	1 1/2"	1 3/16"	26 3/4"	23 5/8"	2"	5/8"	25 1/4"	13"	252

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP

MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Max HP
	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	
407	1000	0.92	0.47	0.91	900	0.92	0.56	0.91	800	0.91	0.63	0.90	700	0.97	0.64	0.95	500	0.98	0.59	0.96	1
409	2100	1.78	0.52	1.66	2000	1.82	0.62	1.69	1900	1.82	0.71	1.69	1800	1.79	1.69	1.70	1700	1.84	0.85	1.69	2
410	2600	1.99	0.61	1.84	2400	1.87	0.72	1.74	2300	1.95	0.80	1.80	2200	2.00	0.88	1.85	2000	1.83	0.99	1.70	2
412	3000	1.89	0.70	1.75	2800	1.86	0.82	1.73	2700	1.99	0.90	1.84	2500	1.98	0.97	1.83	2300	1.92	1.06	1.78	2
415	5300	3.00	0.76	2.70	4800	2.91	0.86	2.62	4500	2.95	0.95	2.65	4200	3.00	1.03	2.70	3600	3.00	1.00	2.70	3
418	6700	4.92	0.60	4.31	6300	4.97	0.68	4.35	5900	4.93	0.77	4.32	5500	4.85	0.84	4.25	5200	4.91	0.91	4.30	5
420	9300	7.38	0.52	6.36	8900	7.47	0.62	6.43	8500	7.43	0.72	6.40	8100	7.42	0.80	6.39	7700	7.50	0.87	6.46	7 1/2
422	10300	7.32	0.54	6.31	9800	7.50	0.64	6.46	9200	7.41	0.74	6.38	8600	7.34	0.82	6.32	8000	7.41	0.88	6.38	7 1/2
425	14300	9.95	0.87	8.48	13500	9.99	0.68	8.52	12500	9.86	0.76	8.41	11900	10.00	0.84	8.53	11400	9.96	0.94	8.49	10

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effect of appurtenances (accessories).



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE

Options & Accessories Vibration Isolators & More




VIBRATION ISOLATORS RUBBER

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.



VIBRATION ISOLATORS SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor use only.

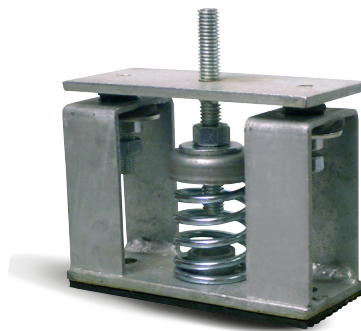

VIBRATION ISOLATORS OUTDOOR SPRING

- Reduces vibration transmission to floors or roof surfaces.
- Designed for outdoor use. Housed to resist lateral motion from winds.




HANGING VIBRATION ISOLATORS

- Hanging rubber-in-shear isolators.
- Reduces vibration transmission to floors or roof surfaces.
- Suitable for indoor and outdoor use.

Options & Accessories Motor Platforms

TRADITIONAL STYLE (POWDER COATED PARTIAL ASSEMBLY)

Part #	HP	Fits Models	Unit Weight (lbs)	Shipping Weight (lbs)
9200011	1 - 15	912,915,915-10, 918-13	28	31
9200002		918	30	32
9200003		920, 922, 920-18	35	38
9200004		925	37	40
9200017		927, 930	50	55
9200019	20 - 50	933, 936	55	60
9200018		918	72	75
9200008		920, 922, 920-18	72	88
9200009		925	72	88
9200020		927, 930	85	95
9200021		933, 936	85	95

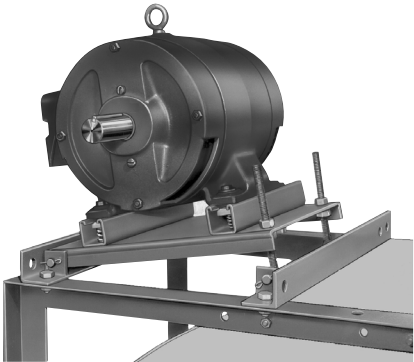

GALVANIZED (KNOCKDOWN)

Part #	HP	Fits Models	Shipping Weight (lbs)
9200011-G	Up to 5 HP	912,915,915-10, 918-13	31
9200002-G	Up to 5 HP	918	32
9200003-G	Up to 5 HP	920, 922, 920-18	38
9200004-G	Up to 5 HP	925	40
9200017-G	Up to 5 HP	927, 930	55
9200019-G	Up to 5 HP	933, 936	60



PAINTED (KNOCKDOWN)

Part #	HP	Fits Models	Shipping Weight (lbs)
9200040	7.5 to 15 HP	912,915,915-10, 918-13	31
9200041	7.5 to 15 HP	918	32
9200042	7.5 to 15 HP	920, 922, 920-18	38
9200043	7.5 to 15 HP	925	40
9200044	7.5 to 15 HP	927, 930	55
9200045	7.5 to 15 HP	933, 936	60

