

# Continuous Performance Ceiling Exhaust

## CEP, CEPD, CEPD140

Canarm's CEP fans are **ultra quiet** and easily customizable using plug and play accessories.



### FEATURES (ALL MODELS)

- Ultra quiet.
- High performance and efficiency.
- Permanently lubricated 120V motor with overload disconnect.
- 6" Poly Collar with built in backdraft damper.
- Premium low profile poly grille.
- ETL listed for tub and shower when connected to a GFCI.
- Plug and Play accessories.

### CEPD

- Variable speed totally enclosed DC motor with thermal protection.
- Built in speed control.
- Energy star rated (excluding model CEPD300).

### CEPD140-3

- Two speed EC motor.
- 3 Selectable CFMs - 80, 110, 140 CFM
- Continuous low speed operation (adjustable).
- Time delay 5-60 minutes.
- Complies with ASHRAE 62.2 whole house fan to meet minimum ventilation required by local building codes.


### ACCESSORIES

- Humidistat
- Motion Sensor
- Speed Control - internal or remote
  - Light Kit
- Ceiling Radiation Damper



## CEP, CEPD & CEPD140-3 SERIES Continuous Performance Ceiling Exhaust


### DIMENSIONS

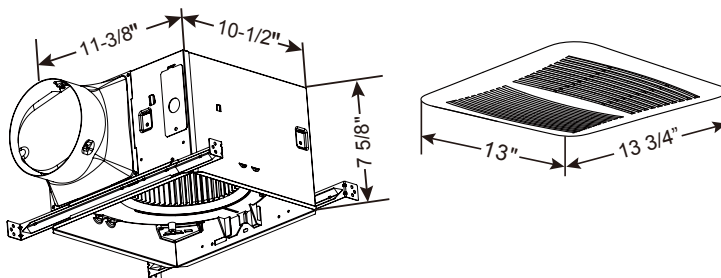

### PERFORMANCE SPECIFICATIONS


| MODEL  | FOR BATHROOM SIZE UP TO | STATIC PRESSURE (IN W.G.) | CFM | SONES | WATTS | POWER (V/HZ) | DUCT DIAMETER |
|--------|-------------------------|---------------------------|-----|-------|-------|--------------|---------------|
| CEP80  | 75 FT2                  | 0.1                       | 80  | 0.7   | 25    | 120/60       | 6"            |
|        |                         | 0.25                      | 69  | 1.2   |       |              |               |
| CEP110 | 105 FT2                 | 0.1                       | 110 | 0.9   | 32    | 120/60       | 6"            |
|        |                         | 0.25                      | 86  | 1.2   |       |              |               |
| CEP150 | 140 FT2                 | 0.1                       | 150 | 0.5   | 40    | 120/60       | 6"            |
|        |                         | 0.25                      | 123 | 1.2   |       |              |               |

### FAN CURVES

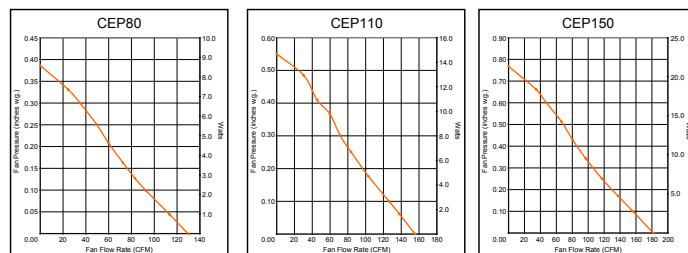


#### CEPD

| MODEL   | FOR BATHROOM SIZE UP TO | PERFORMANCE @ 0.1 IN W.G. |       |       |              |  | DUCT DIAMETER |
|---------|-------------------------|---------------------------|-------|-------|--------------|--|---------------|
|         |                         | CFM                       | SONES | WATTS | POWER (V/HZ) |  |               |
| CEPD150 | 140 FT2                 | 150                       | 0.9   | 12    | 120/60       |  | 6"            |
| CEPD200 | 185 FT2                 | 200                       | 2.0   | 24    | 120/60       |  | 6"            |
| CEPD300 | 275 FT2                 | 290                       | 4.0   | 52    | 120/60       |  | 6"            |



#### CEPD140-3

| MODEL     | STATIC PRESSURE (IN W.G.) | CFM | SONES | WATTS | POWER (V/HZ) | DUCT DIAMETER |
|-----------|---------------------------|-----|-------|-------|--------------|---------------|
| CEPD140-3 | 0.1                       | 80  | 0.3   | 6.0   | 120/60       | 6"            |
|           |                           | 110 | 0.3   | 9.0   |              |               |
|           |                           | 140 | 0.4   | 13.0  |              |               |
|           | 0.25                      | 80  | 1.0   | 11.1  | 120/60       | 6"            |
|           |                           | 108 | 0.8   | 15.0  |              |               |
|           |                           | 136 | 1.0   | 21.0  |              |               |

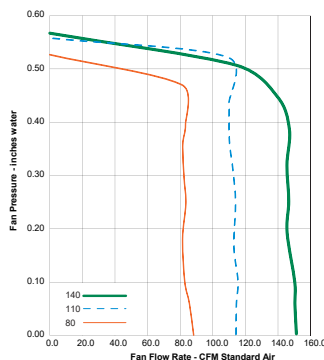

### CONTROL CENTRE

