

Continuous Reliable Performance Ceiling Exhaust

CEPD140-4

Canarm's CEPD140-4 fan is ultra quiet and includes a DC motor for energy efficiency. Choose from 4 different CFM's using built in dip switches, and a second adjustable speed for continuous operation for whole house/building ventilation.


FEATURES

- Ultra quiet.
- High performance and efficiency.
- Two speed totally enclosed DC motor with thermal protection.
- Selectable 80, 110, 140 CFM
- Continuous low speed operation (adjustable).
- Time delay 5-30 minutes.
- Complies with ASHRAE 62.2 whole house fan to meet minimum ventilation required by local building codes.
- 6" Poly Collar with built in backdraft damper.
- Premium low profile poly grille.
- ETL listed for tub and shower when connected to a GFCI.


ACCESSORIES

- Light Kit
- Ceiling Radiation Damper
- SPECIAL ORDER: Humidistat, Motion Sensor


CONTROL CENTRE

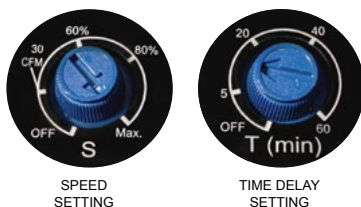

DIMENSIONS

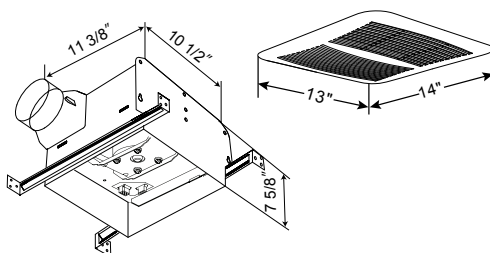

FAN CURVES

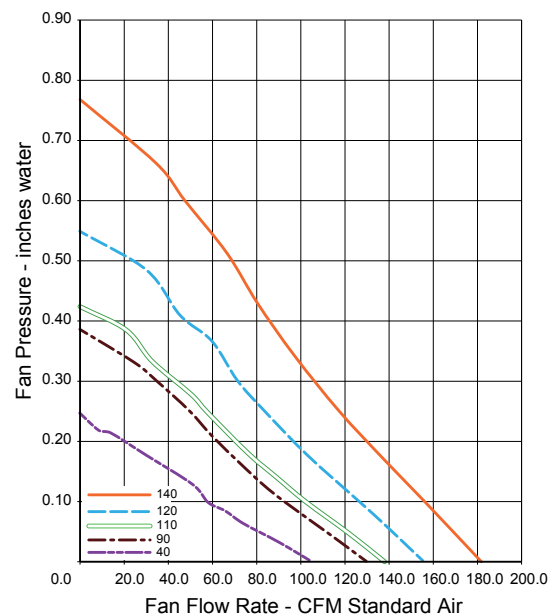

PERFORMANCE SPECIFICATIONS

MODEL	STATIC PRESSURE (IN W.G.)	CFM	SONES	WATTS	POWER (V/HZ)	DUCT DIAMETER
CEPD140-4	0.1	80	0.3	6.0	120/60	6"
			0.3	6.5		
		110	0.3	8.7		
		140	0.5	12.4		
	0.25	49	0.9	7.8	120/60	6"
			0.9	8.3		
		83	1.0	10.6		
		117	1.0	14.5		