

Compact Low Sone Ceiling Exhaust

CP SERIES

Ultra Quiet, High Performance Exhaust Fans



FEATURES

- Ultra quiet operation.
- Plug in permanently lubricated motor engineered for continuous operation.
- Motor comes complete with efficient and long lasting capacitor start motor with a built in overload disconnect for safety and long life.
- Holds an ETL evaluation and conforms to UL and cUL safety standards.
- Rugged 26 GA galvanized steel housing.
- Detachable 4" polymeric collar which includes a light weight built-in back draft damper.
- Elegant yet simple, low profile grille.

ACCESSORIES

- LED light kit
- Radiation damper




Shown with optional LED light kit


PERFORMANCE SPECIFICATIONS

MODEL	STATIC PRESSURE (IN W.G.)	CFM	SONES	WATTS	POWER (V/HZ)	DUCT DIAMETER
CP50	0.1	50	0.4	17	120/60	4"
	0.25	42	N/A			
CP80	0.1	80	1.0	22	120/60	4"
	0.25	72	N/A			
CP80L (with LED light)	0.1	80	1.0	22	120/60	4"
	0.25	72	N/A			

DIMENSIONS

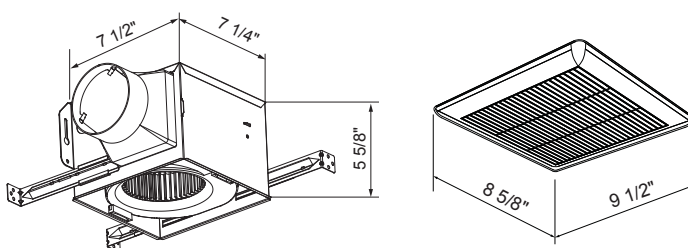


FAN CURVES

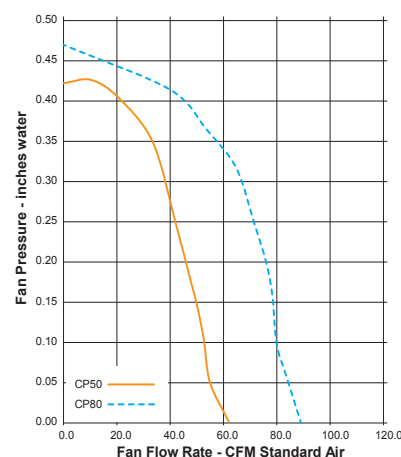

Radiation Dampers

CRD-CEP, CRD-CP, CRD-CNP

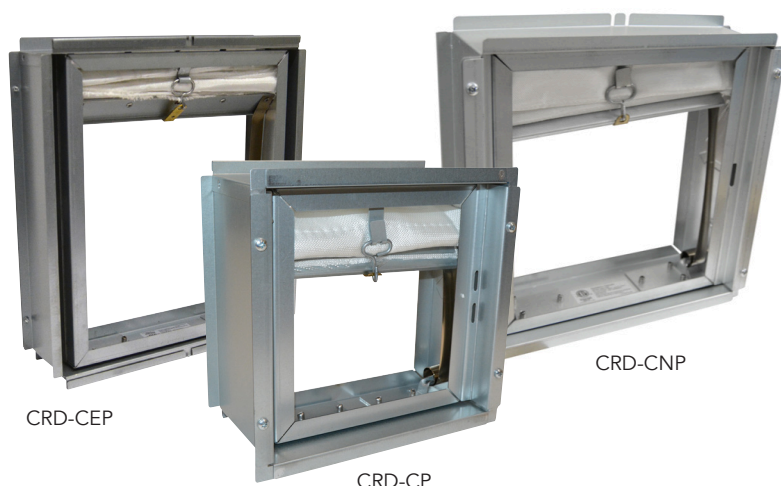

Designed to help limit the transfer of heat & fire through HVAC duct openings in fire-rated assemblies.



FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A
- ETL Classified (UL-555C)

CANARM FAN COMPATIBILITY

MODEL	CORRESPONDING CANARM FAN MODEL
CRD-CEP	CESD100-3, CEP80, CEP110, CEP150
CRD-CP	CP50, CP80, CP80LED
CRD-CNP	CNP80, CNP100, CNP100-3

DIMENSIONS

MODEL	NOMINAL FRAME SIZE (W x L x H)
CRD-CEP	11 1/4" x 12 1/4" x 3"
CRD-CP	8 1/8" x 8 1/4" x 4 1/8"
CRD-CNP	10 3/8" x 9 7/8" x 3"

