


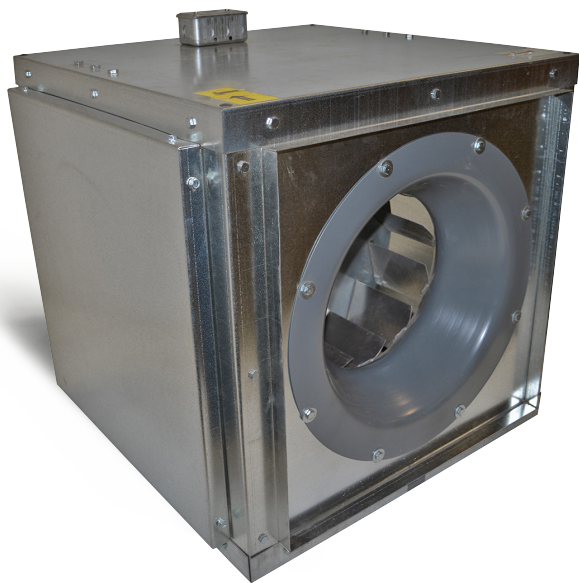


Backward Inclined Direct Drive Square Inline Blowers

GSQ-D SERIES

Insulated options available.

FEATURES

- Available in 9" to 18".
- High efficiency aluminum wheel.
- Side discharge option as standard - simply re-locate the side panel to the discharge.
- Bottom discharge available with flange kit.
- Junction box.
- GSQ-D-V with PSC variable speed motor.
- High Efficiency EC variable speed motor available.
- All standard single phase motor are single speed.
- All 3 phase motors are VFD compatible.
- Consult factory for different motor options.
- Multiple Mounting options.



*Shown with EC
motor*



RELATED MODEL

*DSQ-B
Backward Inclined Belt Drive
Square Inline Blower*

GSQ-D SERIES

Backward Inclined Direct Drive Square Inline Blowers

PERFORMANCE SPECIFICATIONS

TYPICAL MAXIMUM CFM @ SP							
MODEL	1/4" SP	1/2" SP	3/4" SP	1" SP	1 1/4" SP	1 1/2" SP	HP
GSQ090-D-EC	425	325	175	--	--	--	1/4
GSQ105-D-V	1031	907	712	540	--	--	1/2
GSQ105-D-EC							
GSQ120-D-V	1650	1461	1278	1093	892	674	1/2
GSQ120-D-EC							
GSQ135-D-EC	2353	2177	1996	1821	1637	1435	3/4


TYPICAL MAXIMUM CFM @ SP																											
MODEL	1/4"				1/2"				3/4"				1"				1 1/4"				1 1/2"				HP	MAX HP	RPM
	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP	CFM	BHP	FEI	FEP			
GSQ150-D-EC	2750	0.99	0.6	0.88	2555	0.98	0.74	0.87	2365	0.98	0.86	0.87	2153	0.98	0.94	0.87	1974	0.99	1	0.88	1766	0.98	1.04	0.87	1	1 HP	1800
GSQ165-D-EC	3209	0.98	0.69	0.87	2948	0.99	0.82	0.88	2666	0.99	0.93	0.88	2383	0.98	1.01	0.87	2083	0.98	1.05	0.87	1783	0.98	1.05	0.87	1	1 HP	1500
GSQ180-D-EC	3678	0.98	0.76	0.87	3260	0.98	0.9	0.87	2804	0.96	0.99	0.86	2401	0.97	1.02	0.87	1841	0.91	1.01	0.82	-	-	-	-	1	1 HP	1200

CFM values listed above are summarized for convenience.

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B - Free inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

DIMENSIONS

GSQ-D DIRECT DRIVE BACKWARD INCLINED SQUARE INLINE BLOWER					
MODEL	A	B	A1	B1	H
GSQ090-D	15 5/64"	11 5/64"	18 37/64	11	15 7/16"
GSQ105-D	17 1/8"	14 5/8"	21 1/2"	15 3/8"	18 15/16"
GSQ120-D	20"	17"	24 3/8"	17 3/4"	21 13/16"
GSQ135-D	22"	18 3/4"	26 3/8"	19 1/2"	23 13/16"
GSQ150-D	24 1/2"	20 7/8"	38 3/8"	21 5/8"	26 5/16"
GSQ165-D	26 3/4"	23"	31 1/8"	23 3/4"	28 9/16"
GSQ180-D	29 5/8"	25 3/8"	34"	26 1/8"	31 7/16"



ACCESSORIES

- F-DSQ Filter section with 'V' bank 1" aluminum filters. (Filter rack will accept customer supplied 2" filters).
- Suspension or base mount vibration isolators.
- Insulated cabinet available (see price list).

F-GSQ FILTER SECTION					
MODEL	X	Y	Z	FILTER FACTOR	UNIT WEIGHT(LB5)
F-DSQ105	20"	14"	6"	7.085	10
F-DSQ120	20"	17"	6"	3.069	13
F-DSQ135	22"	18 3/4"	6"	2.184	15
F-DSQ150	24 1/2"	20 7/8"	14"	0.762	26
F-DSQ165	26"	23"	14"	0.63	27
F-DSQ180	28 5/8"	25 3/8"	14"	0.463	30

