


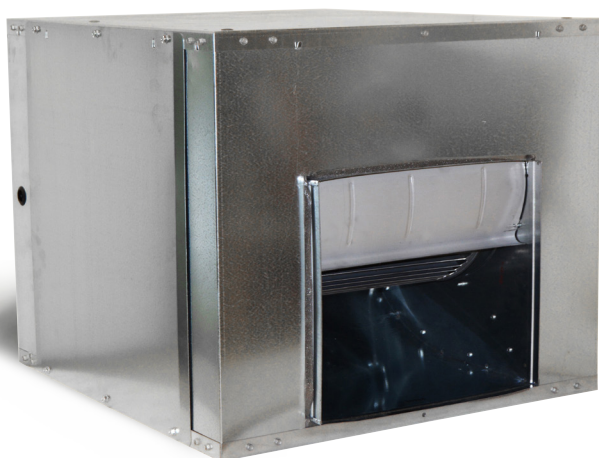

Forward Curved Inline Duct Blowers

IDB SERIES

FEATURES


- Wheel Diameters: 7" through 15"
- CFM: Approximately 500 to 5700 CFM in a single blower.
- Constructed from galvanized steel for durability.
- Forward Curved blowers operate at low RPM for low noise levels.
- Heavy duty ball bearings suitable for -65° F to +250° F.
- Keywayed shafts both ends for clockwise or counter clockwise rotation.
- Saddle type motor mounting platform provides extended belt tension adjustment range on all IDB models.
- Will not "surge", "hunt" or "stall"
- Ideal for indoor applications.
- Optional variable pitch motor pulley permits field adjustment (typically + or - 15%) to match air delivery needs.
- Quiet forward curved blowers operate at ½ the rpm of other inline solutions.



AVAILABLE WITH MOTORS & DRIVES Factory installed.
Consult Delair Software for details



INSULATED OPTIONS AVAILABLE
For insulated or heavy duty applications, please reference our 200 and 9200 series literature.

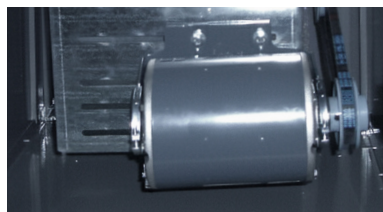

Saddle type motor mounting platform provides extended belt tension adjustment range on IDB models.



Forward curved blowers operate at low RPM for low noise.





IDB SERIES

Forward Curved **Inline** Duct Blowers

TYPICAL APPLICATIONS

- An Inline make-up air solution for cases where a rooftop curb mounted solution is not available.
- As an air moving module for systems built up with other components such as heating/cooling coils.
- Noise sensitive areas - the low rpm forward curved wheel typically radiates less vibration than higher rpm backward inclined wheel solutions.
- When the application requires an air mover in a duct system located in a ceiling space.
 - Redistribution or recirculation of air in a work space.
- Interlocked with entry doors to prevent entry of cold outdoor air into retail sales space and thus greets customers with warmth.
- Bathroom/ rest room exhaust - one duct blower serving multiple intakes.

PERFORMANCE SPECS

TYPICAL MAXIMUM CFM @ SPs																						
MODEL	1/2" SP				1" SP				1 1/2" SP				2" SP				2 1/2" SP				Min HP	Max HP
	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)		
IDB07	1400	0.68	0.8	0.69	1300	0.69	0.96	0.7	1100	0.66	1.05	0.67	1000	0.72	1.08	0.73	800	0.73	1.04	0.74	1/6	0.75
IDB09	2000	0.75	0.91	0.76	1800	0.75	1.09	0.76	1500	0.71	1.21	0.72	1100	0.71	1.12	0.72	800	0.71	1.04	0.72	1/6	0.75
IDB10	3000	1.46	0.77	1.38	2800	1.41	0.96	1.34	2600	1.49	1.04	1.41	2300	1.5	1.09	1.42	1900	1.47	1.08	1.39	1/6	1 1/2
IDB12	3700	1.44	0.86	1.37	3300	1.47	0.99	1.39	2900	1.5	1.07	1.03	2400	1.47	1.1	1.39	1600	1.43	0.93	1.36	1/6	1 1/2
IDB15	6100	2.9	0.77	2.61	5800	2.95	0.93	2.65	5000	2.98	0.96	2.68	4100	2.93	0.94	2.64	3700	2.93	1	2.64	1/3	3

Power rating (BHP) does not include transmission losses. Performance certified is for installation type B: Free inlet, Ducted outlet.
Performance ratings do not include the effect of appurtenances (accessories).

DIMENSIONS

MODEL	A	B	C	OUTLET		F	G	H	J	K	INLET		SHAFT DIAMETER	WEIGHT (lbs) without motor
				D	E						L	M		
IDB07	18"	15 3/8"	23"	8 1/4"	9 3/16"	14 1/2"	9 5/8"	1 1/4"	1 1/4"	7/8"	15 7/8"	13 3/8"	3/4"	43
IDB09	21"	18"	23"	10 1/4"	11 13/16"	17 1/2"	11 3/4"	1 1/4"	1 3/4"	7/8"	19"	16"	3/4"	55
IDB10	22 1/4"	20"	24 3/4"	11 3/8"	13 1/8"	18 3/4"	13 3/8"	1 1/4"	1 3/4"	7/8"	20 1/4"	18"	3/4"	65
IDB12	27"	23"	27 1/2"	13 7/16"	15 5/8"	23 1/2"	16 1/8"	1 1/4"	1 3/4"	7/8"	25"	21"	3/4"	82
IDB15	33 1/2"	28"	32"	15 7/8"	18 5/8"	28"	19 1/2"	2 5/8"	1 3/4"	7/8"	30 1/2"	25"	1"	140



SCAN TO
VIEW FEI
CHARTS



SCAN TO
USE DELAIR
SOFTWARE



NOTE: IDB-X MODELS ARE NOT ETL
OR AMCA CERTIFIED AT THIS TIME.




Canarm certifies that the IDB Series shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 211 & 311 and comply with the requirements of the AMCA Certified Ratings Programme.

The AMCA certified ratings seal applies to air and sound performance only. The Series shown herein are not approved by AMCA for FEI ratings. June 30 2026

TYPICAL SYSTEM COMPRISED OF FILTER SECTION, HEATING COIL & DUCT BLOWER


(Shown with side panels removed for illustrative purposes.)

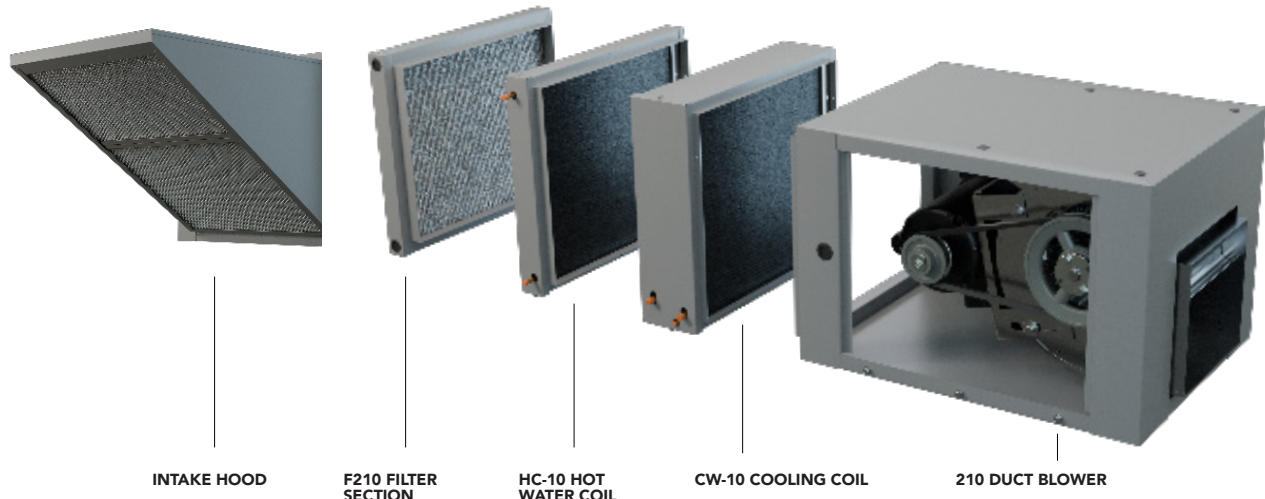


Options & Accessories Filter Sections & Intake Hoods

H9200 INTAKE HOOD

For 9200 Series Duct Blowers

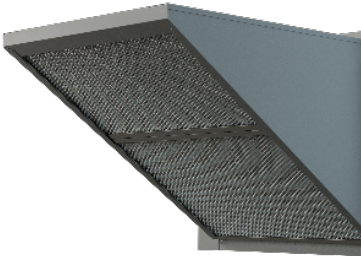


MODEL	L	M	Z	FILTER SIZE	QUANTITY	UNIT WEIGHT (LBS)
H9209	19 1/4"	16 9/16"	21 1/4"	16" X 24"	1	14
H9210	20 1/2"	18 9/16"	25 3/4"	15" X 20"	2	16
H9212	25 3/8"	21 9/16"	30 3/4"	20" X 25" 16" X 25"	2	27
H9215	31 3/16"	25 13/16"	33 1/2"	20" X 28 1/2"	2	38
H9218	35 5/8"	32 11/16"	40 1/4"	20" X 25" (2) 16" X 25"	3	50
H9220	38 5/8"	35 9/16"	22"	FILTERS NOT INCLUDED USE F9220A		40

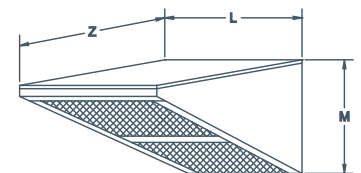


F200A & F9200A FILTER SECTION


For IDB, 200 & 9200 Series Duct Blowers

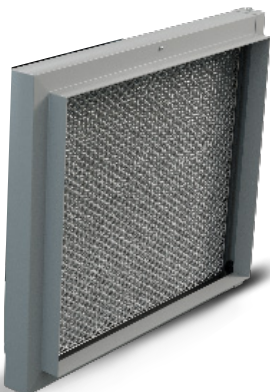

MODEL	A	B	N	P	FILTER SIZE	QUANTITY	UNIT WEIGHT (LBS)
F207A	17 3/4"	15 3/8"	16"	13 1/2"	14 1/8" X 16 5/8"	1	11
F209A	21"	18"	19 1/8"	16 1/8"	16 3/4" X 19 7/8"	1	12
F210A	22 1/4"	20"	20 3/8"	18 1/8"	18 3/4" X 21 1/8"	1	14
F212A	27"	23"	25 1/8"	21 1/8"	21 3/4" X 25 7/8"	1	16
F215A	32 1/2"	26 3/4"	30 5/8"	25 1/8"	25 3/4" X 31"	1	21
F218A	37"	33 1/4"	35 1/4"	31 1/2"	32 1/4" X 35 7/8"	1	46
F9220A	39 3/4"	37 1/4"	38 1/2"	35 1/4"	20" X 25"	6	64




10A



Series F9200A

Options & Accessories Heating & Cooling Coils

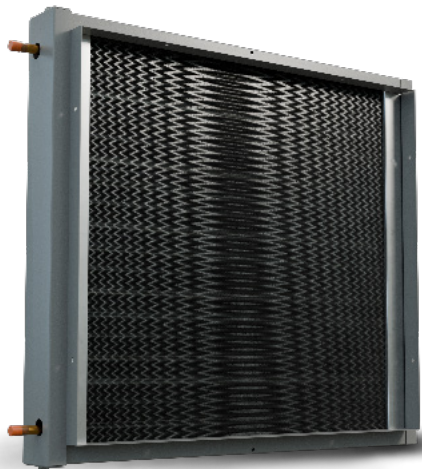

HC SERIES - 2 Row Coil

Hot Water Heating Coils

Horizontal or Vertical Installation




CW SERIES - 4 Row Coil

Chilled Water Cooling Coils with built in Condensate pan


FEATURES

- Designed for use with matching Canarm 200, IDB or 9200 Series Duct Blower & Filter Section.
- Modular concept provides the flexibility and convenience of assembling readily available components into a system to meet custom heating and cooling requirements.
- Lead free construction.
- Grey baked powder coat cabinet finish.
- Convenient for both new or renovation installations.
- Aluminum finish on copper tube construction.
- Suitable for remote installation in duct.
- All coils are sized to mount to the inlet of the corresponding sized duct blower or coil and filter section as illustrated in the modular set up.

DIMENSIONS



HC SERIES



CW SERIES

MODEL	HC-CW COILS					HC COILS			WEIGHT (LBS)	CW COILS			WEIGHT (LBS)
	A (HC)	A (CW)	B	N	P	INLET	OUTLET			INLET	OUTLET		
HC-07 & CW-07	17 3/4"	17 3/4"	15 3/8"	16"	13 1/2"	5/8"	5/8"	10	10	5/8"	5/8"	22	
HC-09 & CW-09	21"	21"	18"	19 1/8"	16 1/8"	5/8"	5/8"	14	14	7/8"	7/8"	29	
HC-10 & CW-10	22 1/4"	22 1/4"	20"	20 3/8"	18 1/8"	5/8"	5/8"	17	17	7/8"	7/8"	36	
HC-12 & CW-12	27"	27"	23"	25 1/8"	21 1/8"	3/4"	3/4"	23	23	7/8"	7/8"	42	
HC-15 & CW-15	32 1/2"	33 1/2"	26 3/4"	30 5/8"	25 1/8"	3/4"	3/4"	32	32	7/8"	7/8"	61	
DRAIN IS 5/8" IN -OD													

MATCHING COIL SECTION				
DUCT BLOWER	HEATING COIL	CHILLED WATER COIL	FILTER	INTAKE HOOD
207 / IDB07	HC-07	CW-07	F207A	NA
209 / IDB09 / 9209	HC-09	CW-09	F209A	H9209
210 / IDB10 / 9210	HC-10	CW-10	F210A	H9210
212 / IDB12 / 9212	HC-12	CW-12	F212A	H9212
215 / IDB15 / 9215	HC-15	CW-15	F215A	H9215