

CANARM®
HVAC
**DC Industrial
Ceiling Fans**

CP48, CP56, CP60



Ideally suited for circulating air in Industrial and Commercial Applications. Canarm's "DC" Fans help save energy year round.

FEATURES

- Available with 48", 56", and 60" blade sweeps.
- Cutting edge technology, DC motor.
- High Performance or High Performance Weather Proof.
- Up to 70% more energy efficient.
- 5 speed with forward and reverse.
- Extremely quiet, even at low speeds.
- Extended motor life. 10 yr warranty.
- Faster startup, stop, change speeds and reversing.
- Easy to install, 50% less weight.
- Air Movement and energy consumption:
 - 56" DC model 244 CFM/watt vs 106 CFM/watt AC model.
- Title-20 certified
- NRCAN and DOE compliant for Canada and the USA.



CONTROL

RREM-DCQ014-W

- Wall mount speed control for DC motors only.
- Controls up to 5 DC fans.
- ON/OFF, 5-speed forward & reverse.

*NOTE: In order to operate, DC industrial fans **MUST** be installed with our RREM-DCQ014-W wall control. DC fans not for use with MC controls.*

PERFORMANCE SPECIFICATIONS

MODEL NUMBER	COLOUR	FAN SIZE	CFM	VOLTAGE	AMPS	CFM/W	FORWARD & REVERSE	DOWNROD LENGTH	SHIPPING WEIGHT (LBS)
CP48D10N	BLACK	48"	7370	120	0.6	211	YES	16"	17
CP48D11N	WHITE	48"	7370	120	0.6	211	YES	16"	17
CP56D11PN (c/w cord + plug)	WHITE	56"	8449	120	0.6	244	YES	16"	18.5
CP56D11N	WHITE	56"	8449	120	0.6	244	YES	16"	18.5
CP56D10N	BLACK	56"	8449	120	0.6	244	YES	16"	18.5
CP56D1136N	WHITE	56"	8449	120	0.6	244	YES	36"	22
CP60D11N	WHITE	60"	8944	120	0.6	259	YES	16"	18.5

High performance weather proof - water resistant (rubber gasket & stainless screws)

MODEL NUMBER	COLOUR	FAN SIZE	CFM	VOLTAGE	AMPS	CFM/W	FORWARD & REVERSE	DOWNROD LENGTH	SHIPPING WEIGHT (LBS)
CP48DW11N	WHITE	48"	7370	120	0.6	211	YES	16"	17
CP56DW11N	WHITE	56"	8449	120	0.6	244	YES	16"	18.5
CP60DW10N	BLACK	60"	8944	120	0.6	259	YES	16"	18.5
CP60DW11N	WHITE	60"	8944	120	0.6	259	YES	16"	18.5



WINTER ENERGY SAVINGS BY HEAT DESTRATIFICATION

Everyone knows that hot air rises. Buildings with ceilings higher than 8 feet have a significant amount of stored heat at the ceiling that will transfer through the roof and be lost and wasted. The higher the ceiling, the greater amount of energy loss potential from the stored heat at the top of the building. This heat/energy loss can be significantly reduced resulting in lower energy bills by the use of Canarm Ceiling Fans.

There can be as much as 25 degrees Fahrenheit difference between floor and ceiling. Heaters will be working when the floor level temperature is 65°F and there is already 80 degree air at the ceiling ready to be recycled. The use of Canarm Ceiling Fans in this situation will move this hot air down from the ceiling to create a more even air temperature throughout the building resulting in a more comfortable working environment and potentially reducing your energy bills by as much as 30%.


HOW TO CHOOSE A FAN

Ceiling fan choice and layout is based on ceiling height and the floor area of the building. As the height of the ceiling increases, larger and more powerful fans are required to achieve destratification.

The floor air coverage of a fan will be greater the higher the ceiling of the building. This is because of the natural cone shape of the air pattern produced by the fan.

Canarm provides two types of fans:

- The traditional ceiling fan, low cost, good performance, great for dry locations.
 - High performance, water resistant models - great for more demanding applications with high moisture or greater air velocity requirements.
- Use the chart to help choose the correct fan size/type and quantity to suit your requirements.

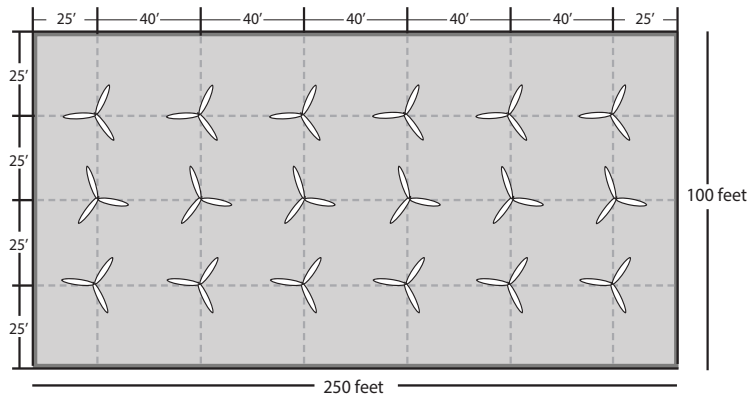

CEILING HEIGHT	SUGGESTED FAN SIZE	FAN FLOOR AREA COVERAGE (SQFT)
12' - 13'	48"	950
14' - 15'		1150
16' - 17'	56"	1400
18' - 19'		1600
20' - 21'		1800
22' - 25'	60"	2250
26' - 30'		2700

EXAMPLE:

What size and how many fans would be required for a building that is 100 feet wide x 250 feet long and has as ceiling height of 16 feet? A typical layout for a building is illustrated.

By using the chart, we see that a ceiling height of 16 feet requires a 56" fan.

Floor Area of the building = 100 feet wide x 250 feet long = 25,000 square feet.

From the chart, we know that the Fan Floor Area Coverage of the 56" model is 1400 square feet at a 16 foot ceiling height.

Therefore, the number of fans required = Floor Area of building / Fan Floor Area Coverage 25,000 square feet / 1400 square feet = 18 fans.

Note: An additional fan should be used about 10 feet in front of each shipping door to act as an air curtain and reduce heating bills in the winter.

Fan Accessories




DC FAN SPEED CONTROL RREM-DCQ-14-W

Great for factories, farms, schools and warehouses.

- Wall mount speed control for DC motors only.
- Controls up to 5 DC fans.
- ON/OFF, 5-speed forward & reverse.

NOTE: In order to operate, DC industrial fans MUST be installed with our RREM-DCQ014-W wall control.


DC fans not for use with MC controls.

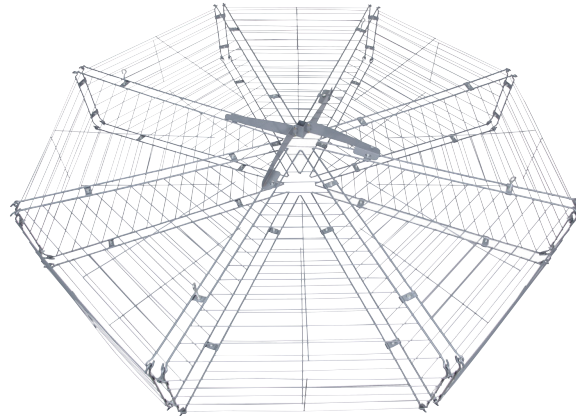

INDUSTRIAL FAN GUARD

Great for factories, farms, schools and warehouses.

- 66.5" W x 13" H
- Knockdown construction.
- Installs in minutes.
- Use with Canarm 48" & 56" ceiling fans.
- Painted grey finish.
- Shipping weight - 21 lbs.
- Grey colour

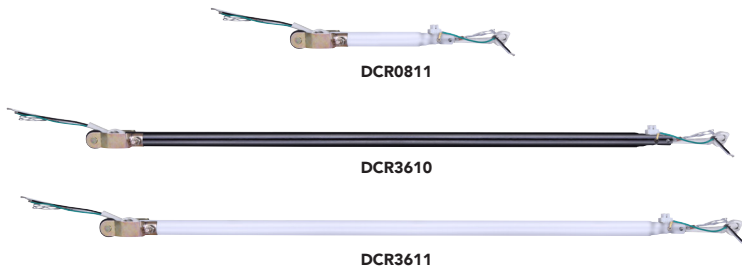

DOWNRODS & MOUNTING KIT

MODEL	DESCRIPTION
DCR0811	8" Downrod for Industrial Ceiling Fans White, complete with lead wire and safety cable
DCR3611	36" Downrod for Industrial Ceiling Fans White, complete with lead wire and safety cable
DCR3610	36" Downrod for Industrial Ceiling Fans Black, complete with lead wire and safety cable
DCR08WR11	8" Downrod for Industrial Ceiling Fans White, water resistant, complete with lead wire and safety cable
DCR36WR11	36" Downrod for Industrial Ceiling Fans White, water resistant, complete with lead wire and safety cable
DCR36WR10	36" Downrod for Industrial Ceiling Fans Black, water resistant, complete with lead wire and safety cable
CP99	Angular Mounting Kit

DC vs. AC FANS

DC fans are highly energy efficient, up to 70% more energy efficient than AC fans. The initial cost is higher than comparable AC fans but the efficiency of DC fans recovers the cost over time on your energy bill. You will see the best returns in locations with high electricity rates.

You can expect less noise and more speed control with an DC fan. DC fans are extremely quiet, even at low speeds. With the extra control over the fan's speed you can manage airflow better, further reduce power consumption and increase life expectancy of DC fans by not being forced into a fixed higher speed to meet your airflow needs.

DC motors require minimal maintenance and produce less heat compared to AC motors, increasing the lifespan of the fan. Parts can be more expensive for a DC motor however, that is why we back up our motors with a 10 year warranty so you can feel confident in your investment.