


Low Stand Industrial Mancoolers

MCU, MCUA

Designed to provide cooling effects
to large open areas

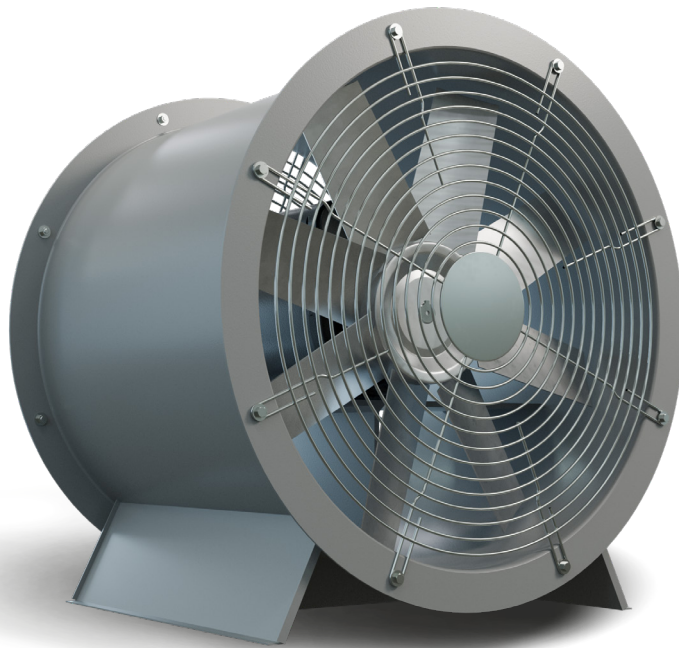

FEATURES

- Drums and motor supports are constructed of heavy gauge steel.
- TEFC continuous duty, ball bearing motors are standard.
- All models are direct drive and available with steel blades or cast aluminum blades.
- Heavy duty, concentric circle, OSHA wire guards are standard on all sizes.
- Consult factory for availability of explosion-proof motors.

OPTIONS

- Junction box installed on the outside of the fan body.



CURRENTLY ONLY AVAILABLE IN CANADA

Low Stand Industrial Mancoolers

PERFORMANCE SPECIFICATIONS

MCU STEEL FAN BLADE

		MODEL		RPM	HP	MCU CFM	dBA @ 5 Ft
		SINGLE PHASE	THREE PHASE				
FAN SIZE	12"	MCU12T10033C	MCU12T30033C*	1140	1/3	940	53
		MCU12T10033B	MCU12T30033B*	1750	1/3	1422	65
	18"	MCU18T10025C	MCU18T30025C*	1140	1/3	2654	64
		MCU18T10050B	MCU18T30050B*	1750	1/2	4016	74
	24"	MCU24T10075C	MCU24T30075C*	1140	3/4	6549	73
		MCU24T10100B	MCU24T30100B*	1750	1	6761	81
		MCU24T10300B	MCU24T30300B*	1750	3	9909	84
	30"	--	MCU30T30150C*	1140	1 1/2	11600	79
		MCU30T10500B	MCU30T30500B*	1750	5	17552	90
	36"	--	MCU36T30200D*	860	2	16364	80
		--	MCU36T30500C*	1140	5	21692	88
	42"	--	MCU42T30500D*	860	5	24499	85
		--	MCU42T30500C*	1140	5	23209	88
	48"	--	MCU48T30750D*	860	7 1/2	35654	89
		--	MCU48T30750C*	1140	7 1/2	32563	92


MCUA CAST ALUMINUM BLADE

		MODEL		RPM	HP	MCUA CFM	dBA @ 5 Ft
		SINGLE PHASE	THREE PHASE				
FAN SIZE	12"	MCUA12T10033C	MCUA12T30033C*	1140	1/3	1450	58
	18"	--	MCUA18T30033C*	1140	1/3	2990	60
		MCUA18T10075B	MCUA18T30075B*	1750	3/4	4590	71
	24"	MCUA24T10100C	MCUA24T30100C*	1140	1	6520	69
		MCUA24T10150B	MCUA24T30150B*	1750	1 1/2	7660	72
		MCUA24T10300B	MCUA24T30300B*	1750	3	11500	79
	30"	MCUA30T10100C	MCUA30T30100C*	1140	1	8680	69
		--	MCUA30T30150C*	1140	1 1/2	11800	73
		MCUA30T10300B	MCUA30T30300B*	1750	3	13300	78
	36"	MCUA30T10500B	MCUA30T30500B*	1750	5	18200	82
		--	MCUA36T30200C*	1140	2	14000	76
		--	MCUA36T30300C*	1140	3	19400	77
		MCUA36T10500B	MCUA36T30500B*	1750	5	16200	78
	42"	MCUA36T10750B	MCUA36T30750B*	1750	7 1/2	21500	85
		--	MCUA42T30200D*	860	2	19200	73
		--	MCUA42T30300D*	860	3	23210	75
		--	MCUA42T30500C*	1140	5	25500	79
		--	MCUA42T30750C*	1140	7 1/2	30690	81
	48"	--	MCUA42T31000B*	1750	10	26700	86
		--	MCUA48T30500D*	860	5	29820	78
		--	MCUA48T30750D*	860	7 1/2	35700	80
		--	MCUA48T31000C*	1140	10	39500	84
		--	MCUA48T31500C*	1140	15	47300	86

For three phase motors, substitute "*" with "M" for 230/460 volt (If 208V required please specify) or "P" for 575 volt
dBA ratings shown are measured at 0" static pressure and should be used as a guideline only.

DIMENSIONS

FAN SIZE	A	B	C	D	E	F	G	H (Hole Dia.)
12"	10 1/4"	18"	16"	14"	10"	17"	12"	7/16"
18"	13 1/4"	24"	23"	21"	11"	18"	18 3/8"	7/16"
24"	16 1/4"	30"	28 1/2"	26 1/2"	13"	21"	24 3/8"	1/2"
30"	19 1/4"	36"	34 1/2"	32 1/2"	13"	21"	30 3/8"	1/2"
36"	22 7/8"	42"	40 1/2"	38 1/2"	19"	27"	36 3/8"	1/2"
42"	25 3/8"	48"	46 1/2"	44 1/2"	21"	27"	42 3/8"	5/8"
48"	28 9/16"	55"	53 1/4"	51 1/4"	23"	31"	48 3/8"	5/8"

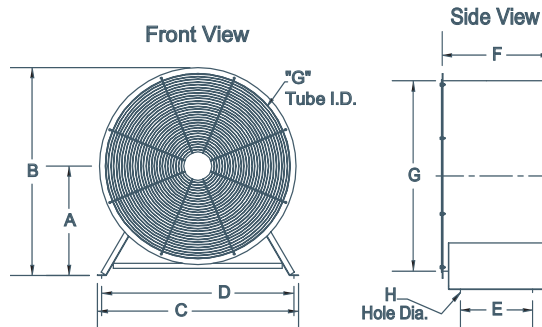

Non-stock, made-to-order products are non-returnable and cannot be cancelled.