


Operating Louver

EL4-O, EL4F-O

Ideal for applications in which the available space does not allow for a fixed louver and a backdraft damper.

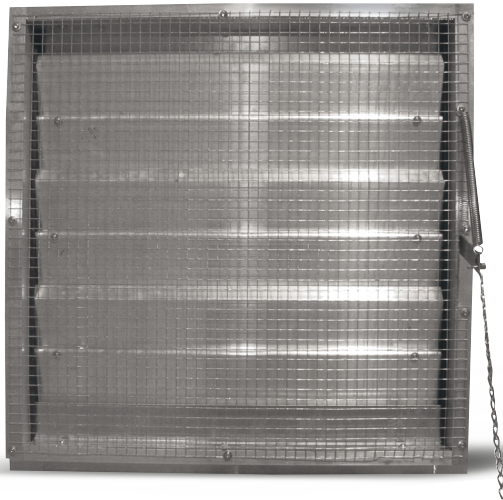

FEATURES

- MATERIAL: **EL4-O, EL4F-O** .085" (2.16 mm) thick, 6063-T5 alloy, extruded aluminum
- BLADE DESIGN: adjustable to 6 1/8" (156 mm) on centres with storm proof performance, 45° spaced
- CONSTRUCTION: blade assembly is designed to prevent bowing and distortions. Complete with jam and blade seals.
- SCREENS: 1/2" x 1/2" (12.7 mm x 12.7 mm) regalvanized wire
- FINISHES: mill is standard finish, anodized or baked enamel available at additional cost.
- SIZES: available in any combination of width or height (multiple sections may be required). Minimum size available: 12" x 12".
- STANDARD METHOD OF OPERATION: Chain.

ORDERING METHOD



EL40-24x24 **EL40F-24x24**
WIDTH HEIGHT WIDTH HEIGHT
 NO FLANGE WITH FLANGE



BELIMO MOTORS OPTIONS AVAILABLE.

See Controls & Thermostats section

EL-4-O and EL4-OF are 4" deep operable louvers with storm proof blades which pivot on aluminum pins rotating in nylon flanged bearings. Manual or motor operators may be employed. Bird screen is 1/2" x 1/2" regalvanized wire and normally mounted on the face of the louvers.